


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A7	REVISED PER ECO-15-003872	25MAR2015	DD	DS

D

C

B

A

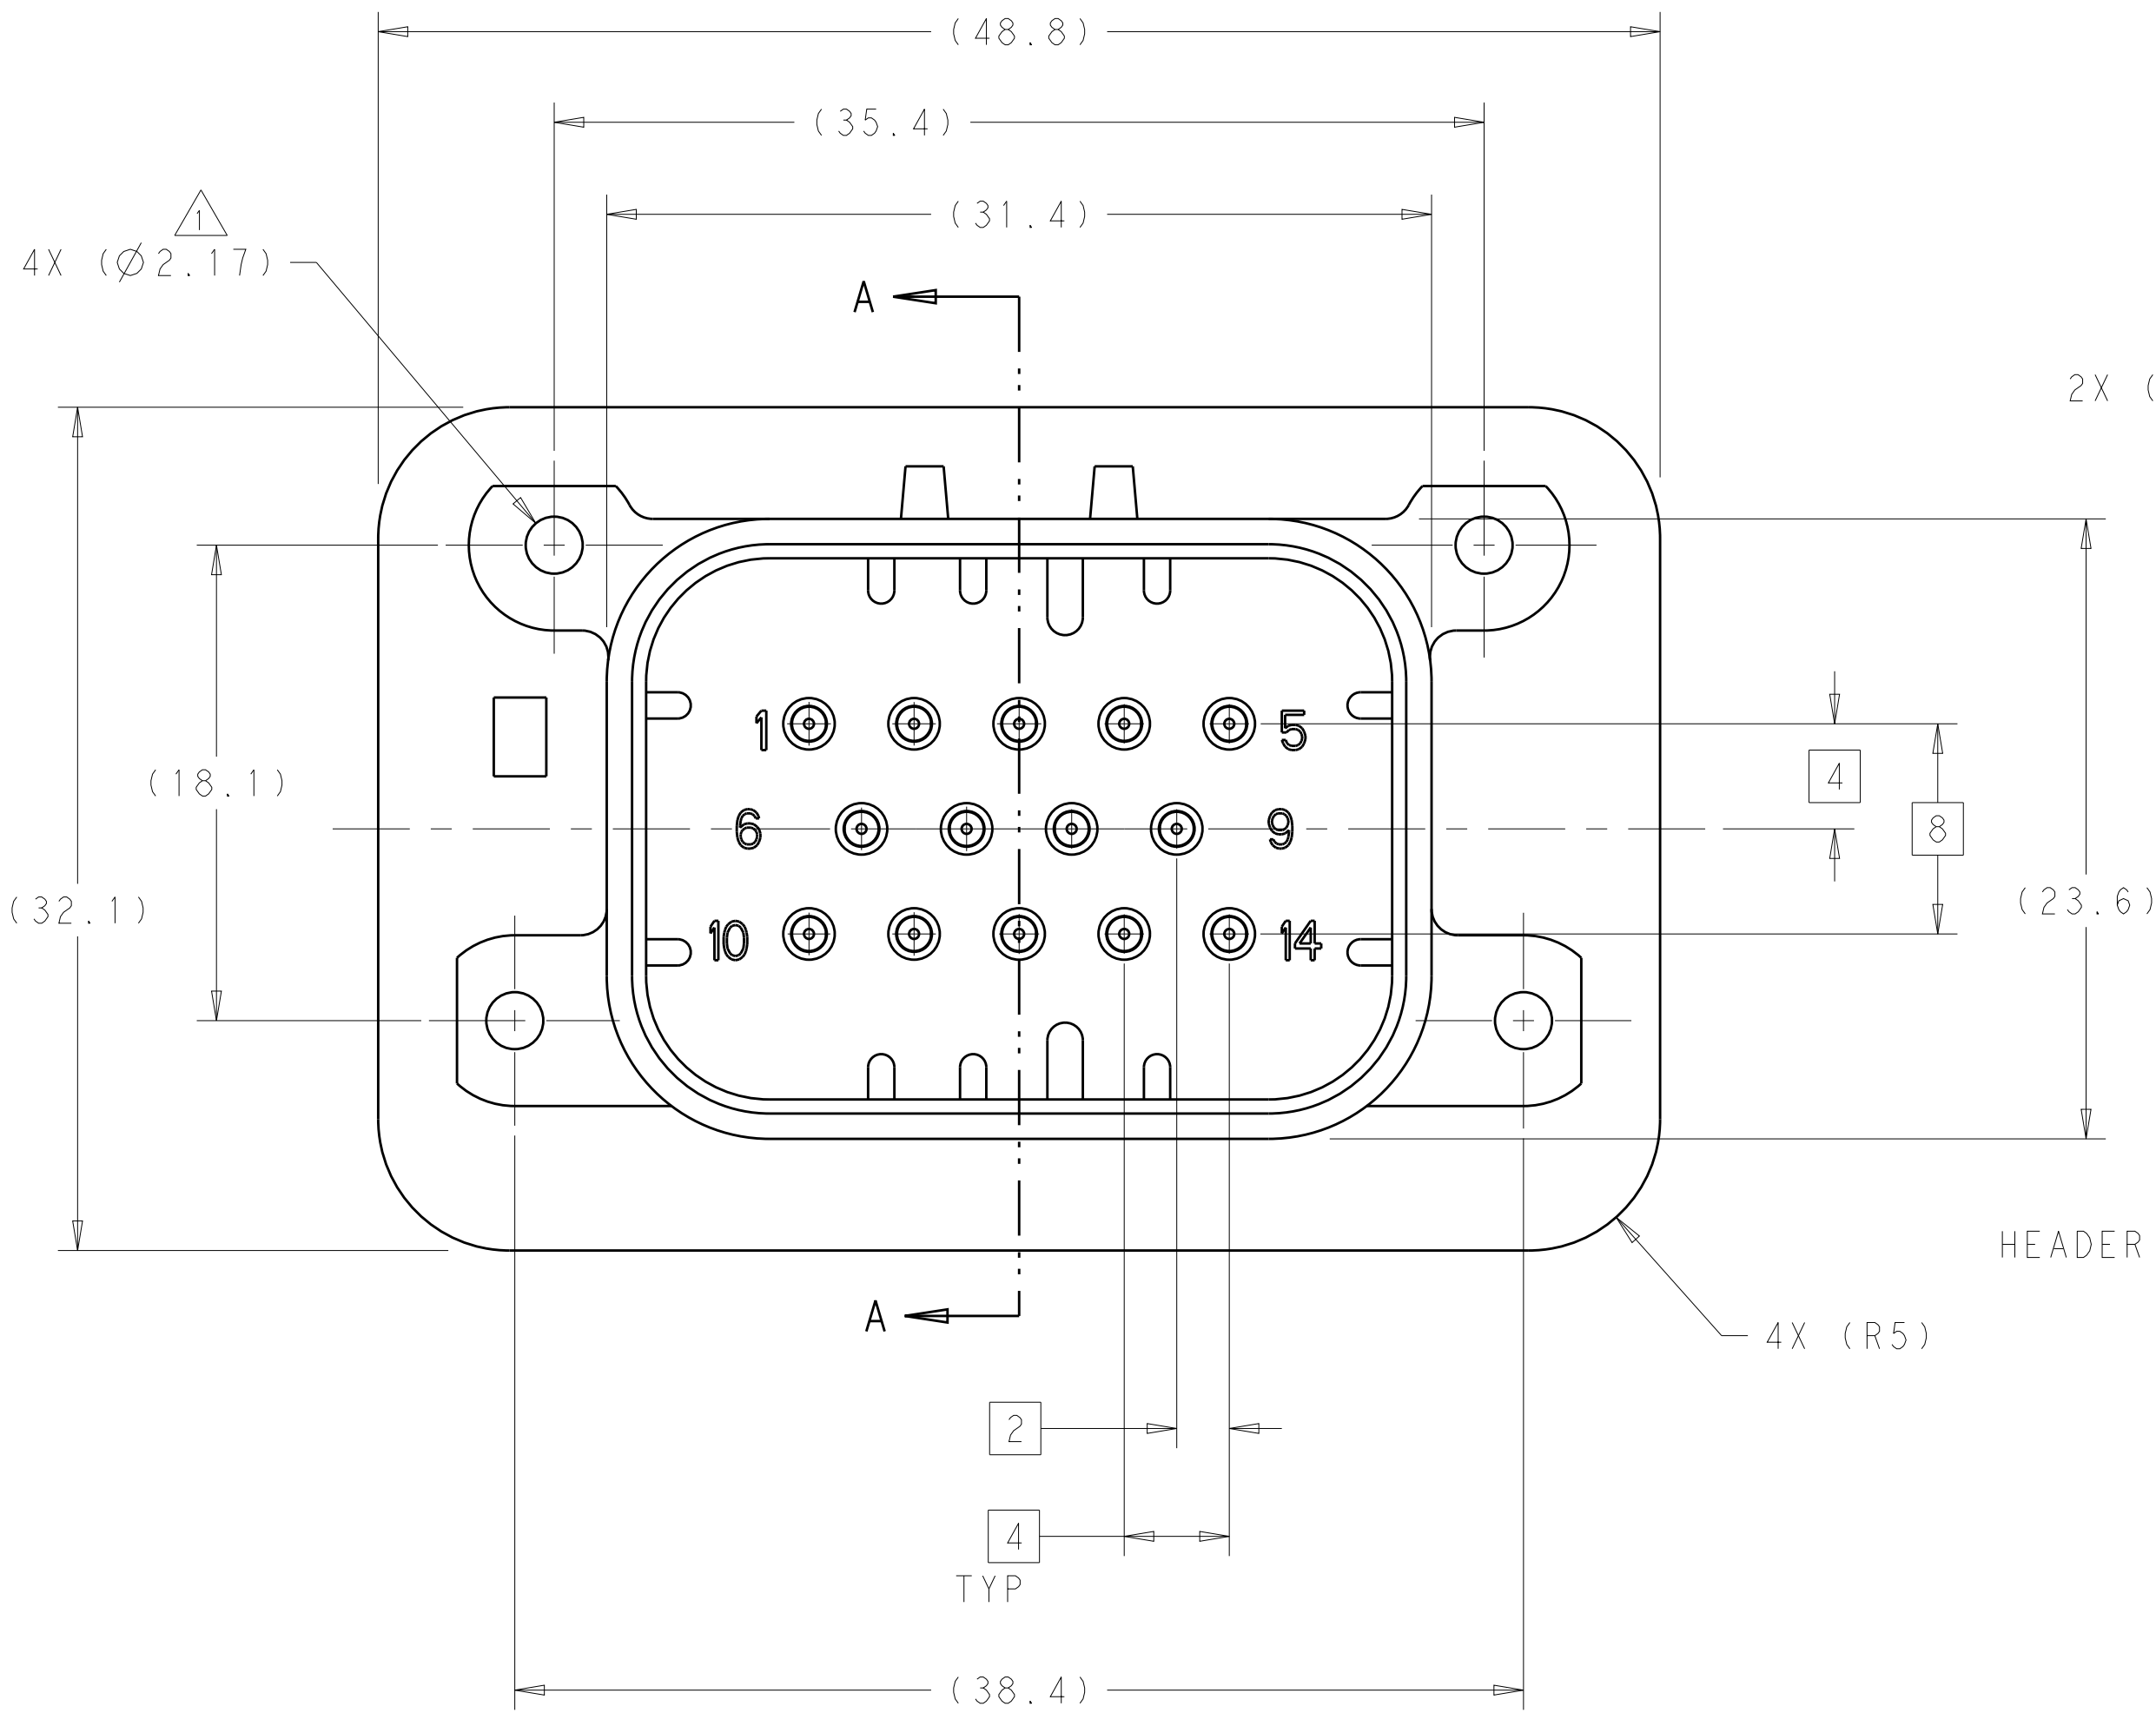


2X (2)

HEADER HOUSING


4X (R5)

TYP

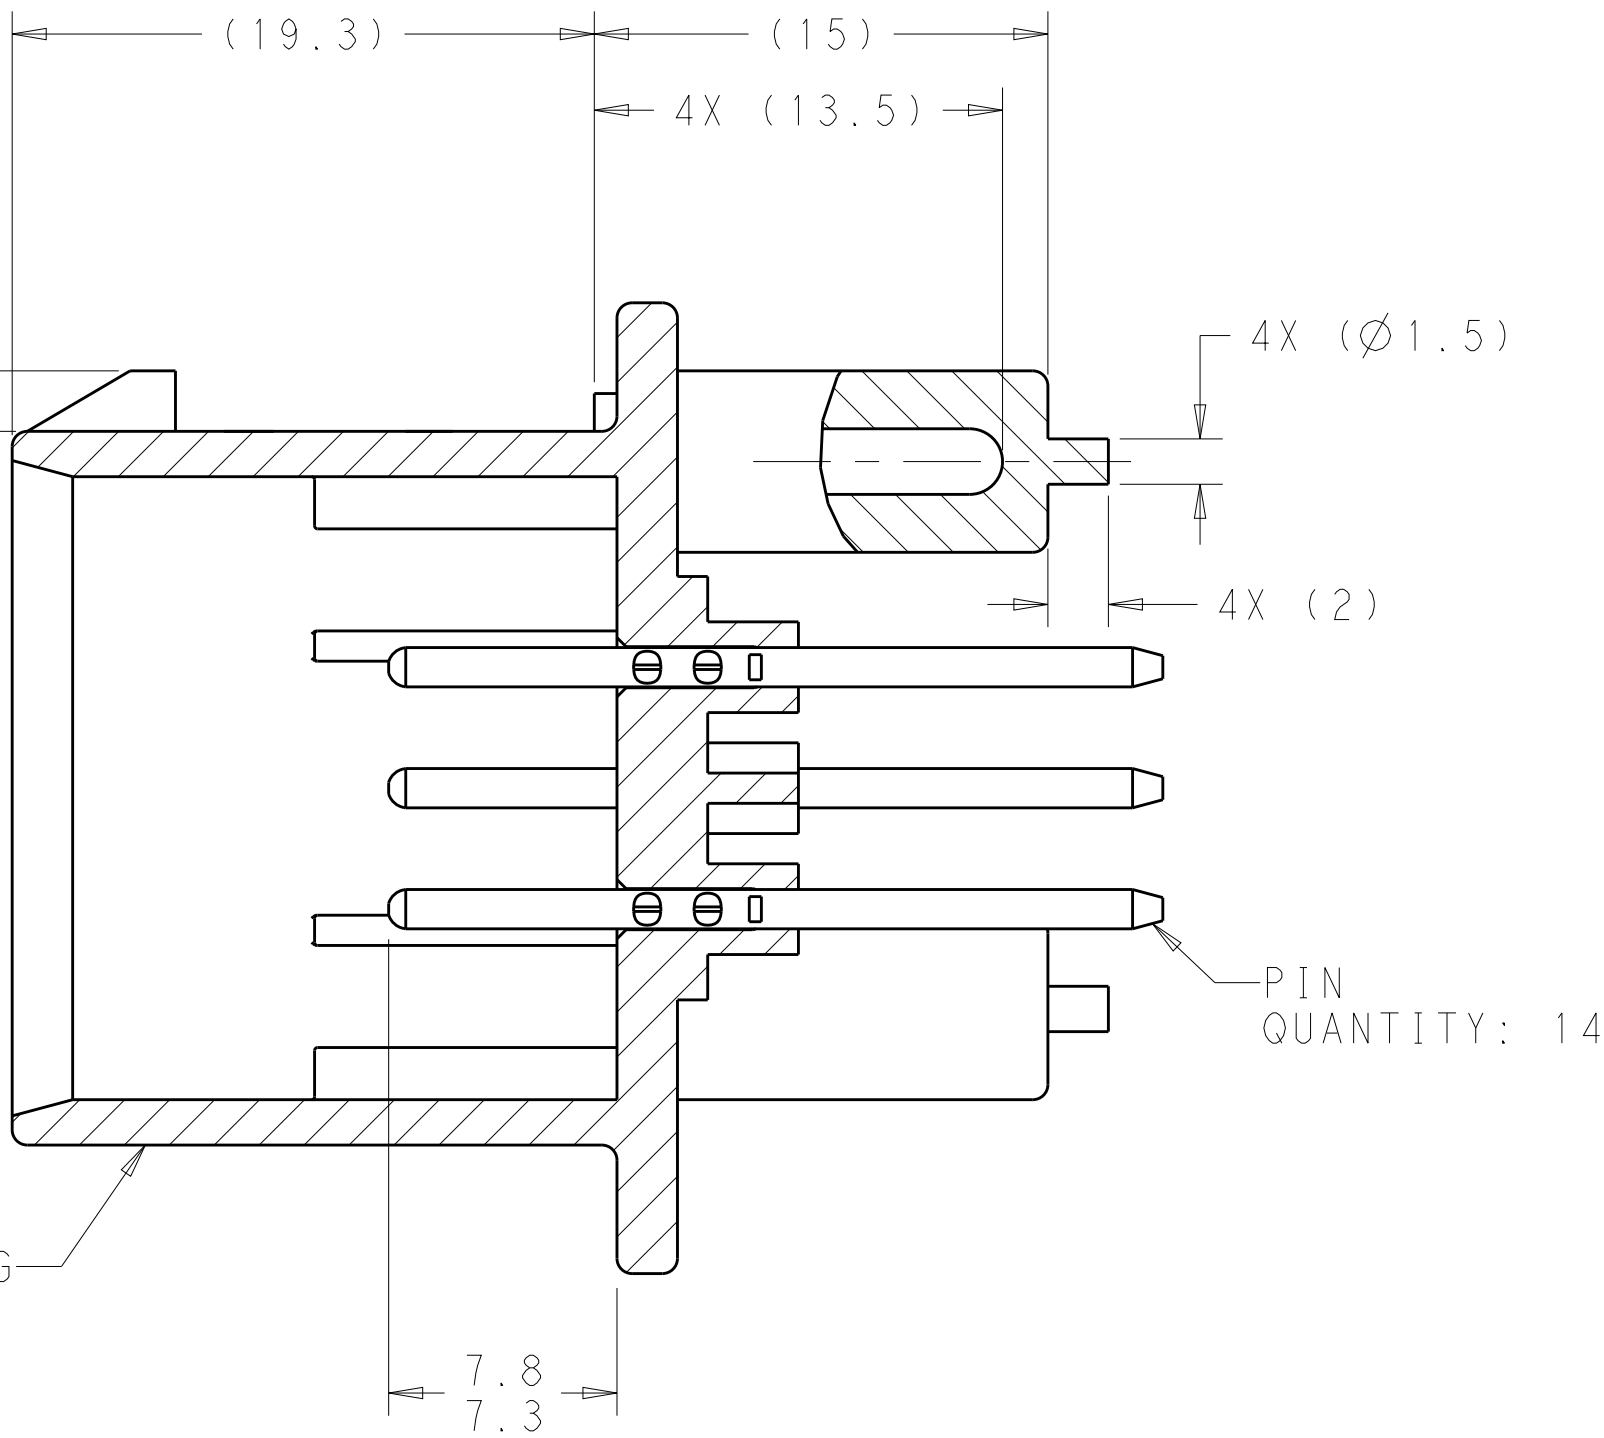

SECTION A-A

- ACCEPTS #3 SELF TAPPING THREAD FORMING SCREWS OR METRIC EQUIVALENT. DRIVE TO 0.6-0.8 N-m.
- DATE CODE TO BE BRANDED IN THIS LOCATION PER TE SPEC 102-60. FIRST 2 DIGITS = YEAR, SECOND 2 DIGITS = WEEK, LAST DIGIT = DAY.
- MATERIALS: HEADER HOUSING - GLASS FILLED PBT
PINS - TIN OR GOLD PLATED BRASS
- HOUSING COLORS ARE MECHANICALLY KEYED TO MATE ONLY WITH IDENTICALLY COLORED PLUG ASSEMBLIES.
- HEADER MATES TO PLUG ASSEMBLY 776273 WHICH USES REELED TERMINAL 770520 OR LOOSE PIECE TERMINAL 770854

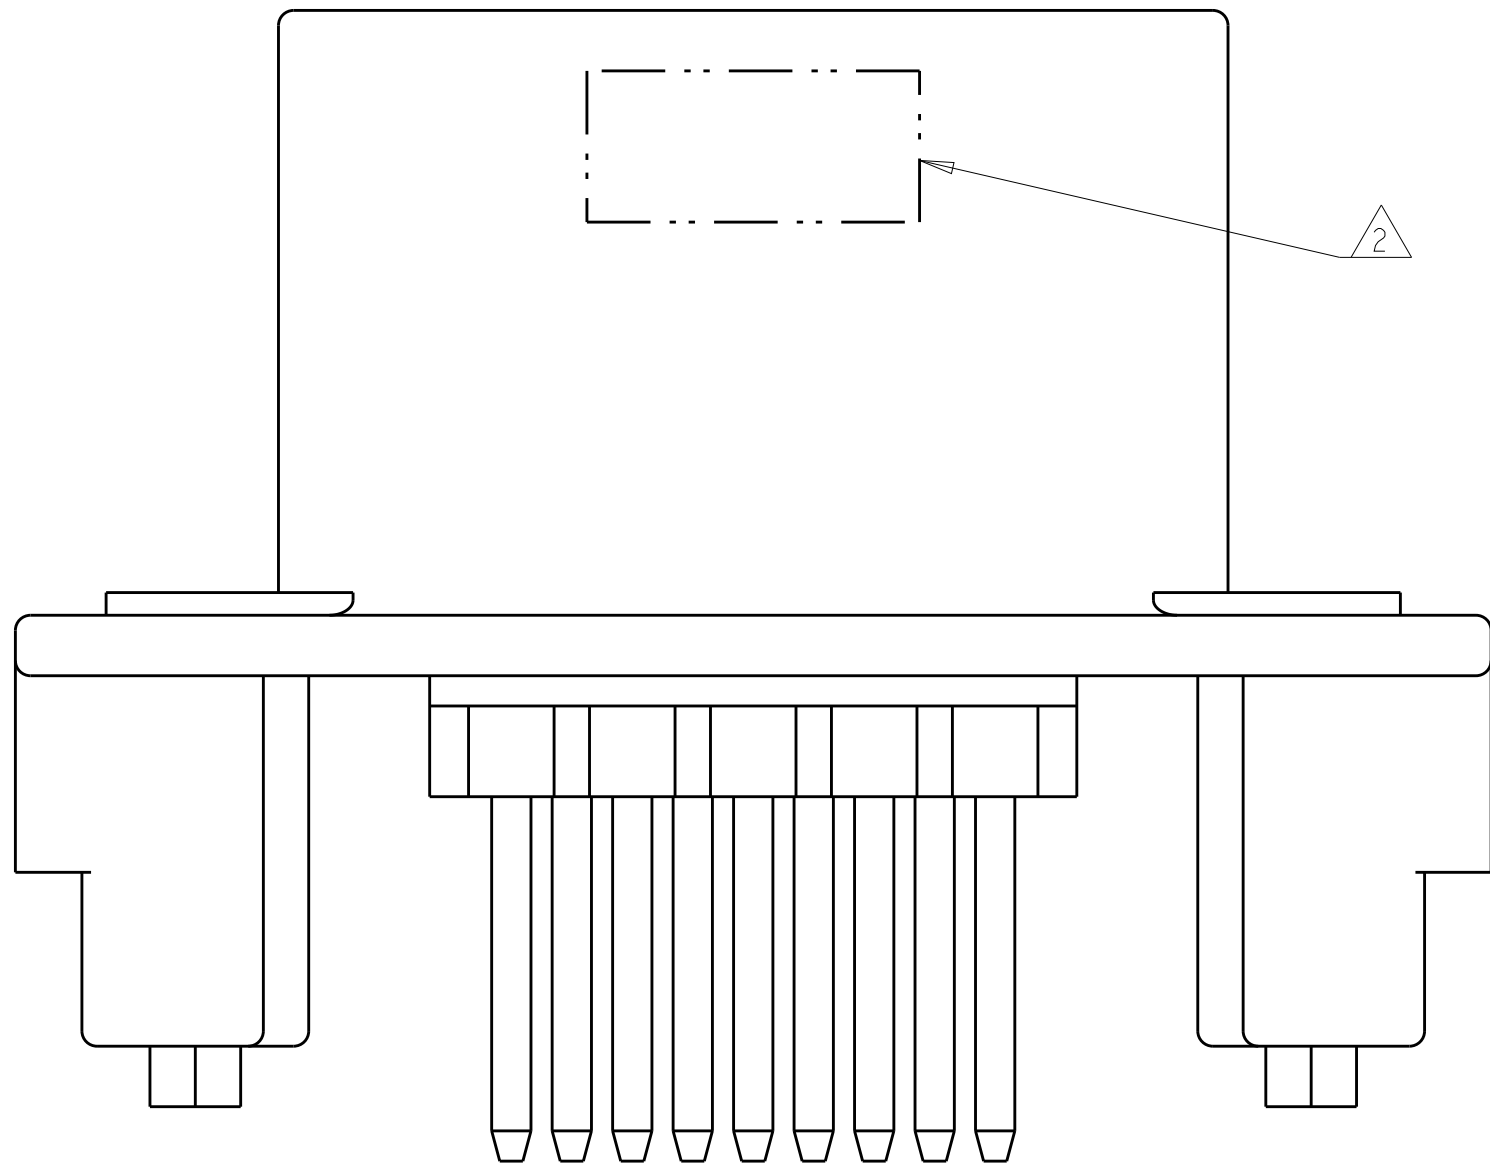


776261-1 & 1-776261-1 SHOWN


BLUE	DURAGOLD	1-776261-5
GRAY	DURAGOLD	1-776261-4
NATURAL	DURAGOLD	1-776261-2
BLACK	DURAGOLD	1-776261-1
BLUE	TIN	776261-5
GRAY	TIN	776261-4
NATURAL	TIN	776261-2
BLACK	TIN	776261-1
HEADER COLOR	PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 04FEB2010	TE Connectivity	
DIMENSIONS:		CHK D. STRAUSSER 22MAR2010	NAME	
mm		APVD D. STRAUSSER 27APR2010	PRODUCT SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		108-1329	APPLICATION SPEC	
0 PLC ±.2		114-16016	WEIGHT	
1 PLC ±0.13			CUSTOMER DRAWING	
2 PLC ±.1			SCALE 4:1	
3 PLC ±.1			SHEET 1 OF 2	
4 PLC ±.1			REV A7	
ANGLES ±.5°				
FINISH				



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

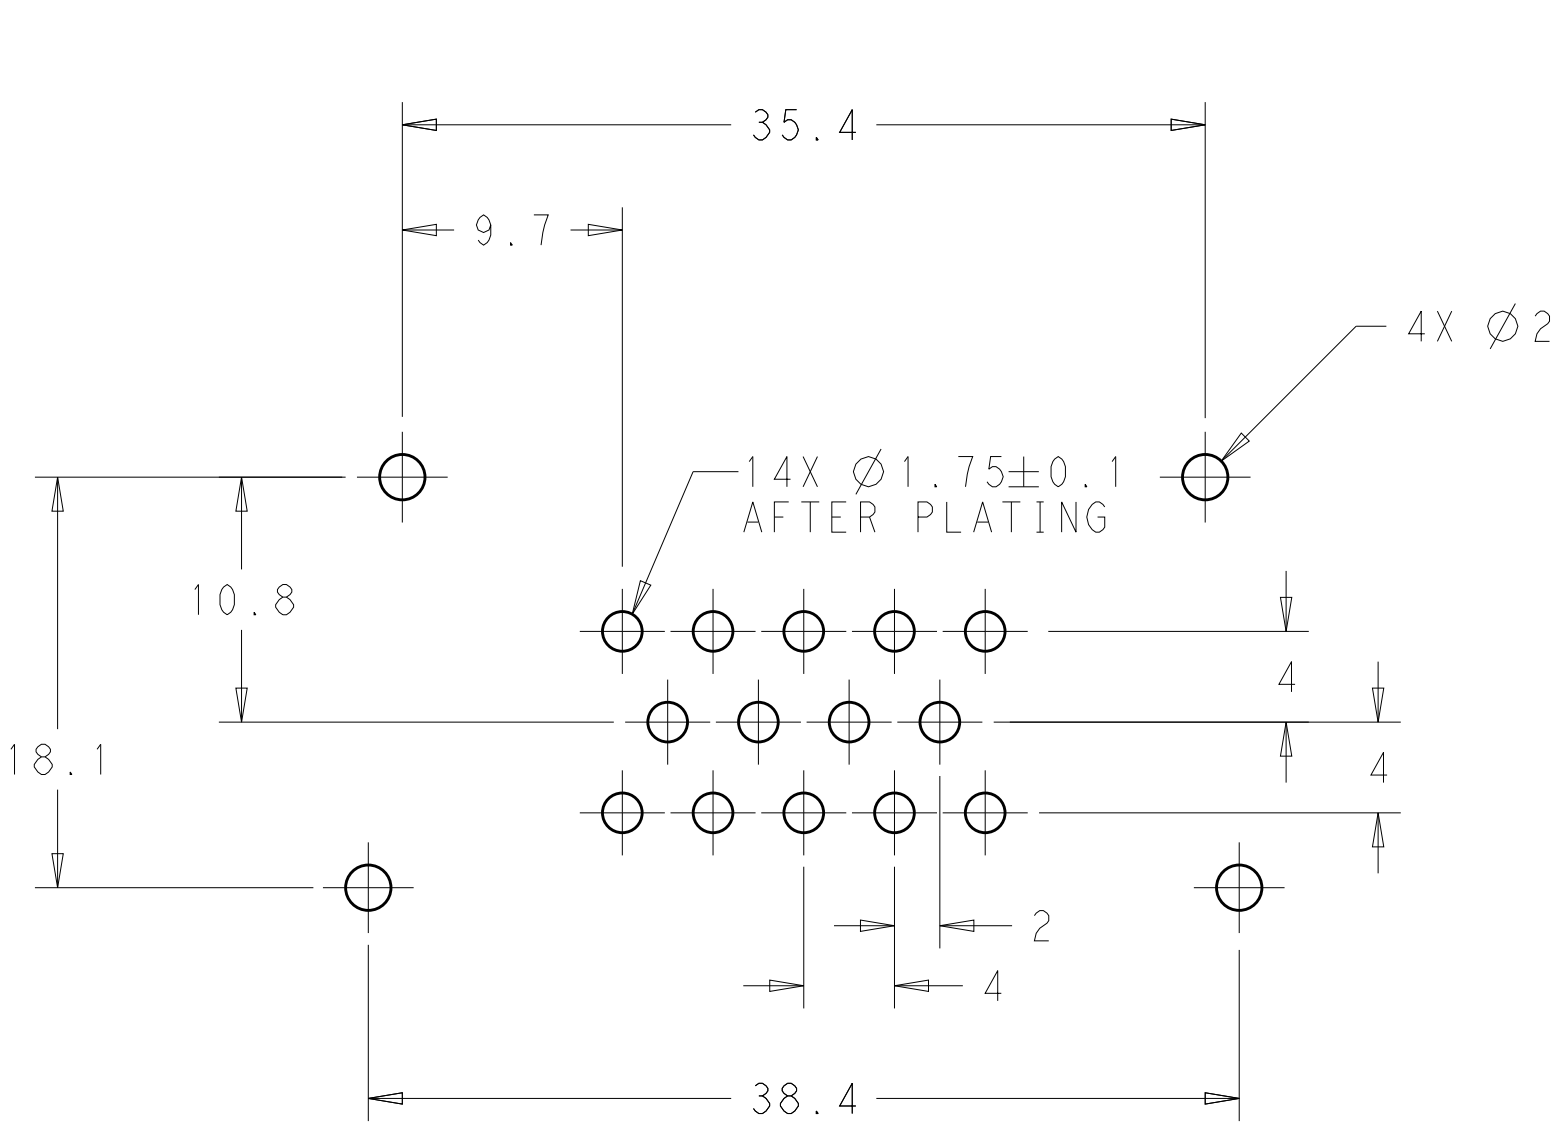


RECOMMENDED P.C. BOARD LAYOUT
FOR 1.57 THICK P.C. BOARD

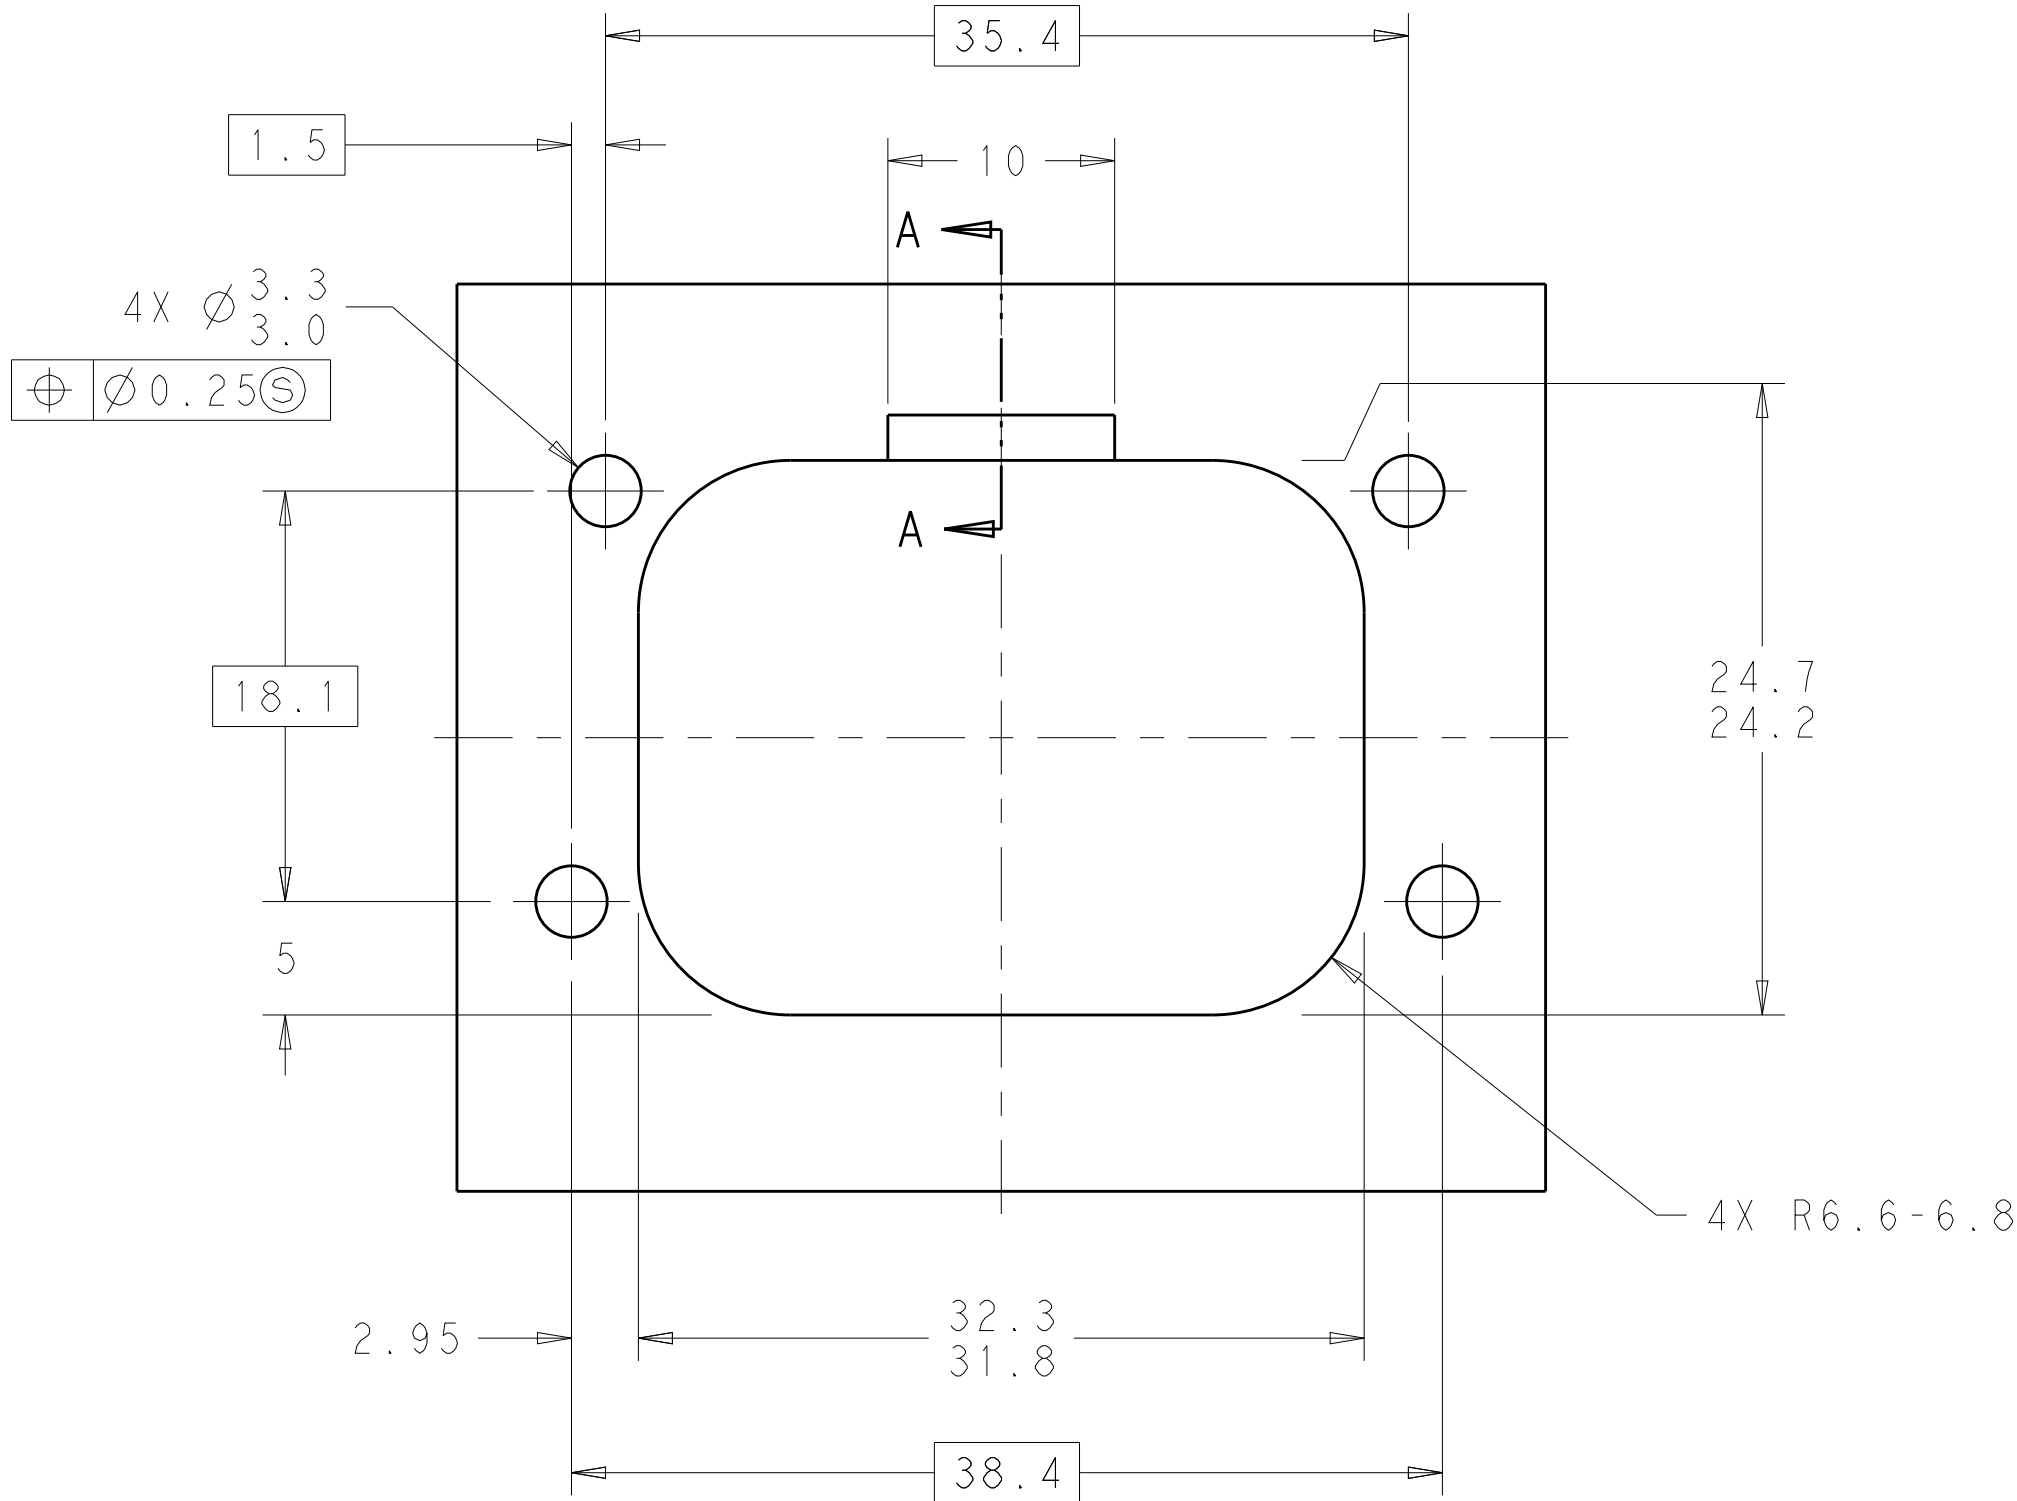



RECOMMENDED MOUNTING HOLE LAYOUT
FOR 5.0 MAX THICK PANEL

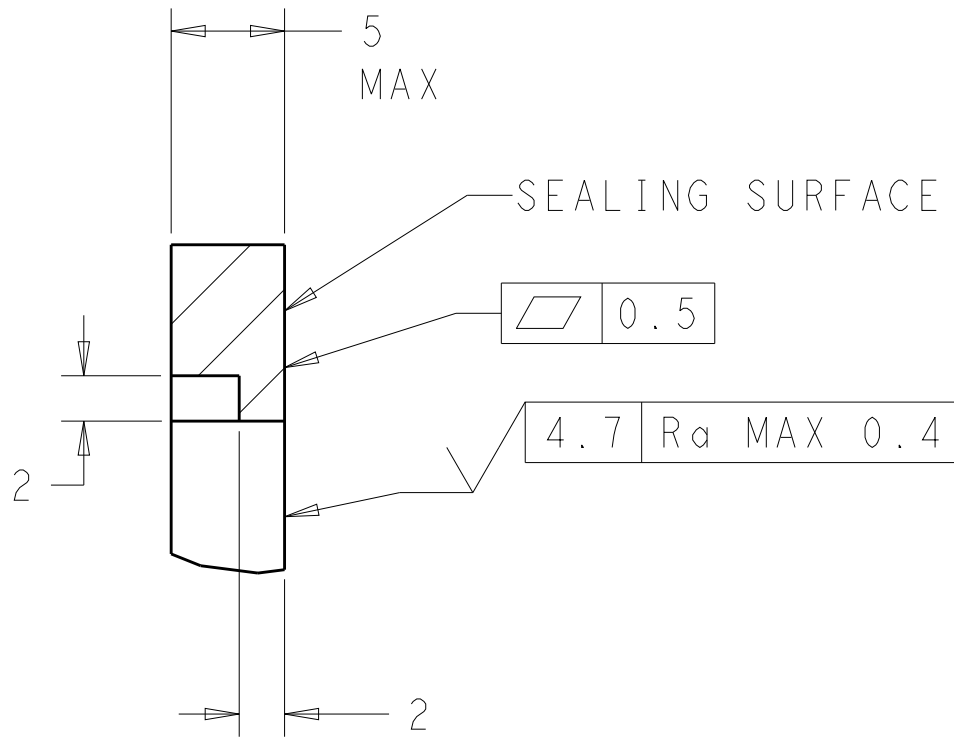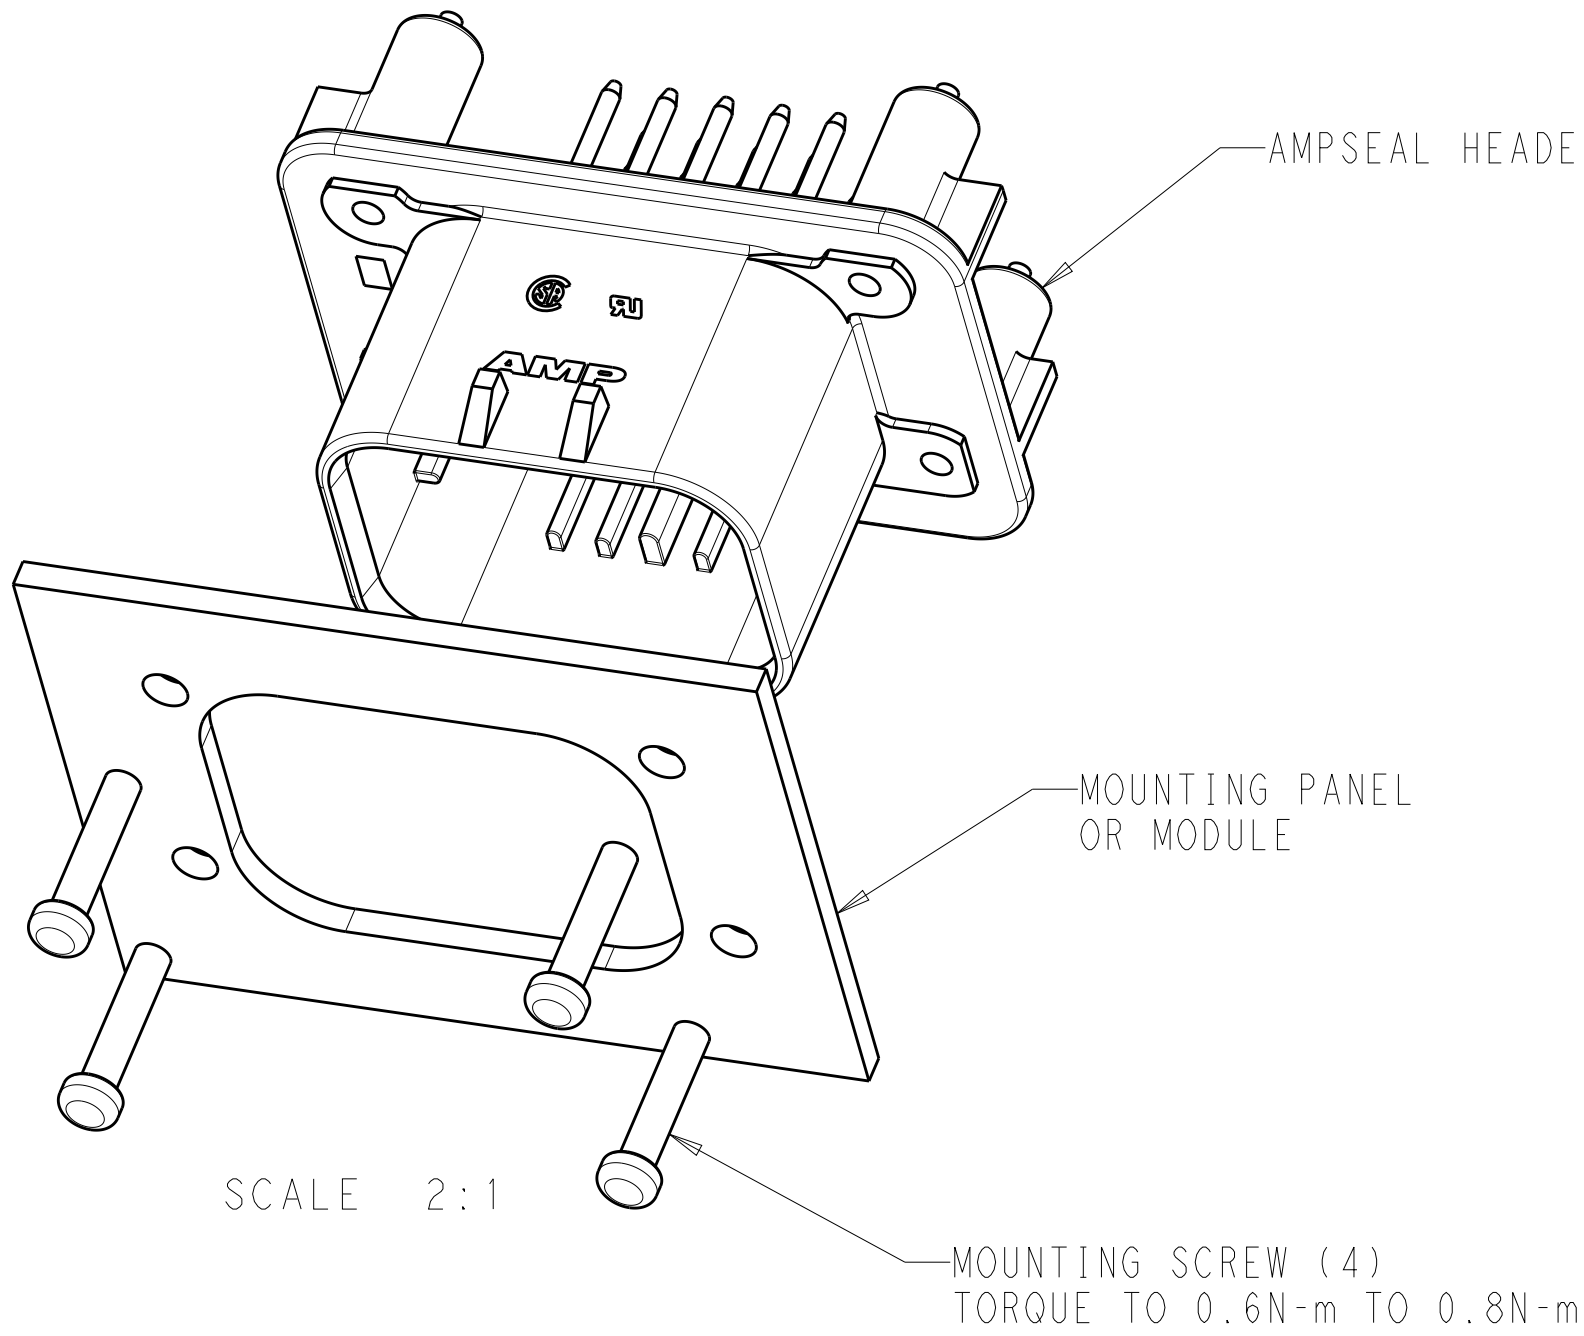


SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

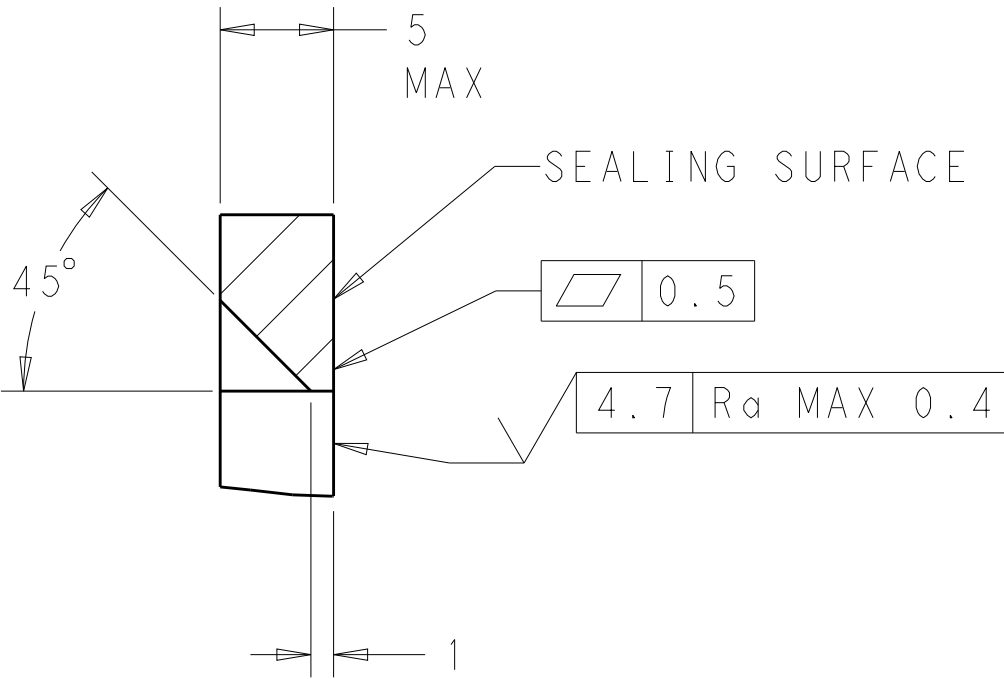


SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

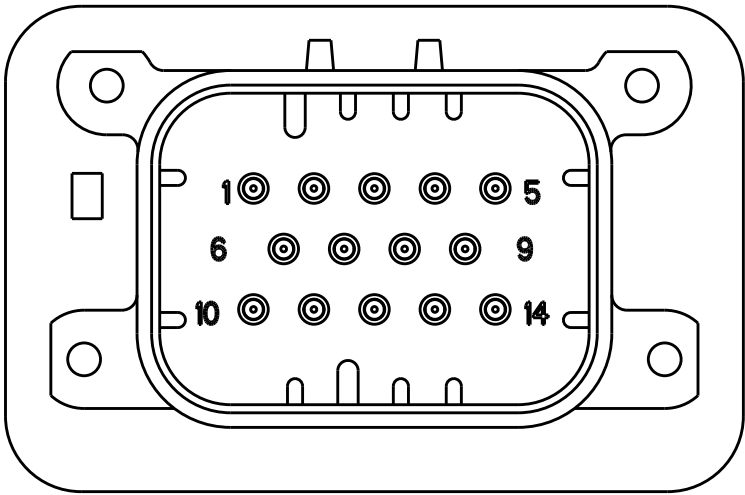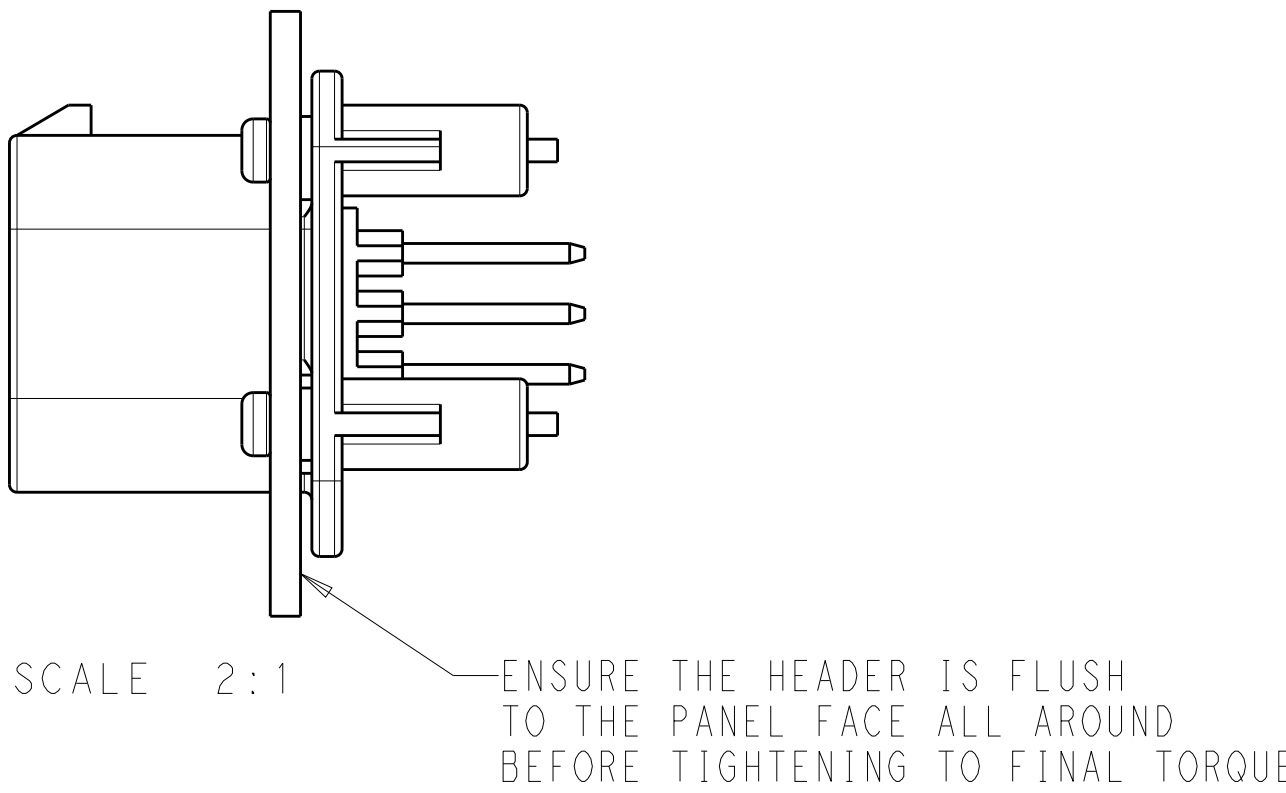

776261-2 & 1-776261-2
KEY LOCATION
SCALE 2:1

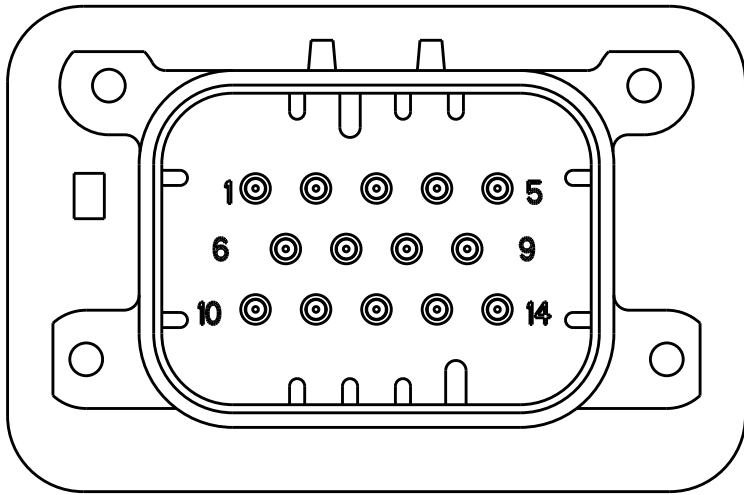

776261-4 & 1-776261-4
KEY LOCATION
SCALE 2:1

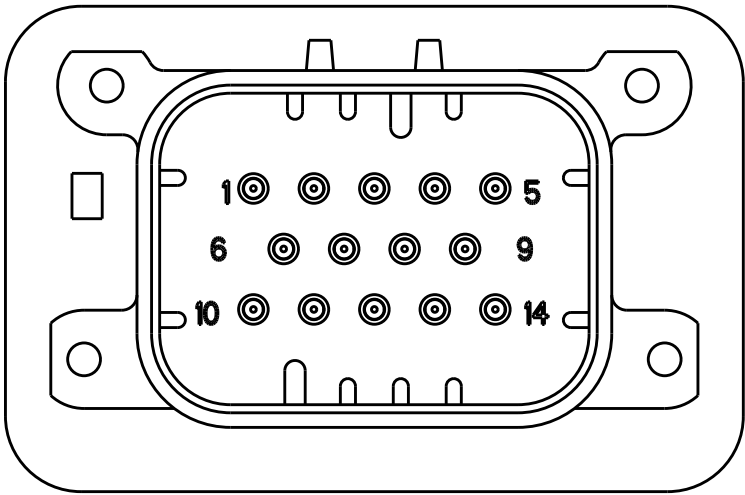

776261-5 & 1-776261-5
KEY LOCATION
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 04FEB2010 CHK D. STRAUSSER 22MAR2010 APVD D. STRAUSSER 27APR2010	TE Connectivity	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME	
mm	0 PLC ±.2 1 PLC ±0.2 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±4°	108-1329	HEADER ASSEMBLY, 14 POSITION, VERTICAL, AMPSEAL	
MATERIAL	FINISH	APPLICATION SPEC	SIZE	RESTRICTED TO
-	-	114-16016	A100779C=776261	-
-	-	WEIGHT	CAGE CODE	SCALE
-	-	CUSTOMER DRAWING	114-16016	4:1
		DATE	SHEET	OF
		04FEB2010	2	2
		REV	A7	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[776261-5](#)