

Polypropylene (PP) Capacitors for Pulse Applications with Metal Foil Electrodes and Metallized Internal Series Connection in PCM 15 mm to 52.5 mm. Capacitances from 100 pF to 4.7 μF. Rated Voltages from 400 VDC to 6000 VDC.

Special Features

- Extremely high pulse duty
- Self-healing
- Internal series connection
- Very low dissipation factor
- Negative capacitance change versus temperature
- According to RoHS 2011/65/EU

Typical Applications

For high pulse and high frequency applications e.g.

- Switch mode power supplies
- Converters in drives and power electronics
- Deflection systems in monitors and TV-sets
- Electronic ballasts

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Aluminium foil and double-sided metallized plastic film

Internal construction:

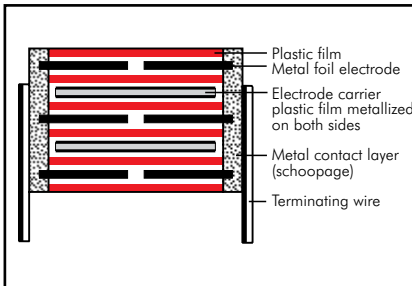

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.

Electrical Data

Capacitance range:

100 pF to 4.7 μF (E12-values on request)

Rated voltages:

400 VDC, 630 VDC, 850 VDC, 1000 VDC, 1250 VDC, 1600 VDC, 2000 VDC, 4000 VDC, 6000 VDC

Capacitance tolerances:

±20%, ±10%, ±5% (other tolerances are available subject to special enquiry)

Operating temperature range:

-55° C to +100° C

Climatic test category:

55/100/56 in accordance with IEC

Test voltage:

2 U_r, 2 sec / 6 kV: PCM < 37.5

1.6 U_r, 2 sec, PCM 37.5 1.2 U_r, 2 sec.

Dielectric absorption:

0.05%

Dissipation factors at +20° C: tan δ

at f	C ≤ 0.1 μF	0.1 μF < C ≤ 1.0 μF	C > 1.0 μF
1 kHz	≤ 5 × 10 ⁻⁴	≤ 5 × 10 ⁻⁴	≤ 5 × 10 ⁻⁴
10 kHz	≤ 6 × 10 ⁻⁴	≤ 6 × 10 ⁻⁴	-
100 kHz	≤ 10 × 10 ⁻⁴	-	-

Insulation resistance at +20° C:

C ≤ 0.1 μF: ≥ 1 × 10⁵ MΩ

C > 0.1 μF: ≥ 30 000 sec (MΩ × μF)

Measuring voltage: 100 V/1 min.

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from +85° C for DC voltages and from +75° C for AC voltages

Reliability:

Operational life > 300 000 hours

Failure rate < 1 fit (0.5 × U_r and 40° C)

Maximum pulse rise time: for pulses equal to the rated voltage

Capacitance pF/μF	max. pulse rise time V/μsec at T _A < 40° C								
	400VDC	630VDC	850VDC	1000VDC	1250VDC	1600VDC	2000VDC	4000VDC	6000VDC
100 ... 220	-	-	-	-	-	56000	56000	-	-
330 ... 680	-	-	-	-	-	51000	56000	56000	56000
1000 ... 2200	29000	29000	29000	29000	29000	46000	51000	51000	51000
3300 ... 6800	9000	14000	27000	27000	29000	29000	29000	29000	29000
0.01 ... 0.022	9000	11000	11000	11000	11000	11000	13000	13000	13000
0.033 ... 0.068	9000	11000	11000	11000	11000	11000	11000	13000	13000
0.1 ... 0.22	7000	11000	11000	11000	11000	11000	11000	13000	13000
0.33 ... 0.68	6000	10000	11000	11000	11000	11000	11000	-	-
1.0 ... 2.2	5000	6600	8300	8300	9500	11000	-	-	-
3.3 ... 4.7	2500	-	-	-	-	-	-	-	-

Mechanical Tests

Pull test on pins:

d ≤ 0.8 φ: 10 N in direction of pins

d > 0.8 φ: 20 N in direction of pins

according to IEC 60068-2-21

Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with

IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec²

in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and

including case size 15 x 26 x 31.5 /

PCM 27.5 mm.

Detailed taping information and graphs

at the end of the catalogue.

For further details and graphs please

refer to Technical Information.

Continuation

General Data

Capacitance	400 VDC/250 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	5	11	18	15	FKP1G011004B_	5	11	18	15	FKP1J011004B_
1500 "	5	11	18	15	FKP1G011504B_	5	11	18	15	FKP1J011504B_
2200 "	5	11	18	15	FKP1G012204B_	5	11	18	15	FKP1J012204B_
3300 "	5	11	18	15	FKP1G013304B_	5	11	18	15	FKP1J013304B_
4700 "	5	11	18	15	FKP1G014704B_	5	11	18	15	FKP1J014704B_
6800 "	5	11	18	15	FKP1G016804B_	6	12.5	18	15	FKP1J016804C_
0.01 µF	5	11	18	15	FKP1G021004B_	7	14	18	15	FKP1J021004D_
0.015 "	6	12.5	18	15	FKP1G021504C_	5	14	26.5	22.5	FKP1J021005A_
0.022 "	7	14	18	15	FKP1G022204D_	8	15	18	15	FKP1J021504F_
0.033 "	5	14	26.5	22.5	FKP1G022205A_	6	15	26.5	22.5	FKP1J021505B_
0.047 "	8	15	18	15	FKP1G023304F_	7	16.5	26.5	22.5	FKP1J022205D_
0.068 "	6	15	26.5	22.5	FKP1G023305B_	8.5	18.5	26.5	22.5	FKP1J023305F_
	7	16.5	26.5	22.5	FKP1G024705D_	10.5	20.5	26.5	22.5	FKP1J024705H_
	8.5	18.5	26.5	22.5	FKP1G026805F_	9	19	31.5	27.5	FKP1J024706A_
						11	21	31.5	27.5	FKP1J026806B_
						9	19	41.5	37.5	FKP1J026807A_
0.1 µF	10.5	20.5	26.5	22.5	FKP1G031005H_	13	24	31.5	27.5	FKP1J031006D_
	9	19	31.5	27.5	FKP1G031006A_	11	22	41.5	37.5	FKP1J031007B_
0.15 "	11	21	31.5	27.5	FKP1G031506B_	13	24	41.5	37.5	FKP1J031507C_
0.22 "	13	24	31.5	27.5	FKP1G032206D_	15	26	41.5	37.5	FKP1J032207D_
	11	22	41.5	37.5	FKP1G032207B_					
0.33 "	13	24	41.5	37.5	FKP1G033307C_	19	32	41.5	37.5	FKP1J033307F_
0.47 "	17	29	41.5	37.5	FKP1G034707E_	20	39.5	41.5	37.5	FKP1J034707G_
0.68 "	19	32	41.5	37.5	FKP1G036807F_	24	45.5	41.5	37.5	FKP1J036807H_
1.0 µF	20	39.5	41.5	37.5	FKP1G041007G_	35	50	41.5	37.5	FKP1J041007J_
1.5 "	31	46	41.5	37.5	FKP1G041507I_	40	55	41.5	37.5	FKP1J041507K_
						35	50	57	52.5	FKP1J041509F_
2.2 "	35	50	41.5	37.5	FKP1G042207J_	45	55	57	52.5	FKP1J042209H_
3.3 "	35	50	57	52.5	FKP1G043309F_					
4.7 "	45	65	57	52.5	FKP1G044709J_					

* AC voltages: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

New values

** PCM = Printed circuit module = pin spacing

Dims. in mm.

The values of the WIMA FKP 4 range according to main catalogue 2015 are still available on request.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 148.		

Rights reserved to amend design data without prior notification.

Continuation page 74

Continuation

General Data

Capacitance	850 VDC/450 VAC*					1000 VDC/600 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	5	11	18	15	FKP1M011004B	5	11	18	15	FKP1O111004B
1500 "	5	11	18	15	FKP1M011504B	5	11	18	15	FKP1O111504B
2200 "	5	11	18	15	FKP1M012204B	5	11	18	15	FKP1O112204B
3300 "	5	11	18	15	FKP1M013304B	5	11	18	15	FKP1O113304B
4700 "	6	12.5	18	15	FKP1M014704C	6	12.5	18	15	FKP1O114704C
6800 "	7	14	18	15	FKP1M016804D	7	14	18	15	FKP1O116804D
0.01 µF	8	15	18	15	FKP1M021004F	8	15	18	15	FKP1O121004F
	6	15	26.5	22.5	FKP1M021005B	6	15	26.5	22.5	FKP1O121005B
0.015 "	6	15	26.5	22.5	FKP1M021505B	6	15	26.5	22.5	FKP1O121505B
0.022 "	8.5	18.5	26.5	22.5	FKP1M022205F	8.5	18.5	26.5	22.5	FKP1O122205F
0.033 "	10.5	20.5	26.5	22.5	FKP1M023305H	10.5	20.5	26.5	22.5	FKP1O123305H
	9	19	31.5	27.5	FKP1M023306A	9	19	31.5	27.5	FKP1O123306A
0.047 "	11	21	31.5	27.5	FKP1M024706B	11	21	31.5	27.5	FKP1O124706B
0.068 "	13	24	31.5	27.5	FKP1M026806D	13	24	31.5	27.5	FKP1O126806D
	11	22	41.5	37.5	FKP1M026807B	11	22	41.5	37.5	FKP1O126807B
0.1 µF	13	24	41.5	37.5	FKP1M031007C	13	24	41.5	37.5	FKP1O131007C
0.15 "	15	26	41.5	37.5	FKP1M031507D	15	26	41.5	37.5	FKP1O131507D
0.22 "	19	32	41.5	37.5	FKP1M032207F	19	32	41.5	37.5	FKP1O132207F
0.33 "	20	39.5	41.5	37.5	FKP1M033307G	20	39.5	41.5	37.5	FKP1O133307G
0.47 "	31	46	41.5	37.5	FKP1M034707I	31	46	41.5	37.5	FKP1O134707I
0.68 "	35	50	41.5	37.5	FKP1M036807J	35	50	41.5	37.5	FKP1O136807J
1.0 µF	40	55	41.5	37.5	FKP1M041007K	40	55	41.5	37.5	FKP1O141007K
	35	50	57	52.5	FKP1M041009F	35	50	57	52.5	FKP1O141009F
1.5 "	45	55	57	52.5	FKP1M041509H	45	55	57	52.5	FKP1O141509H
2.2 "	45	65	57	52.5	FKP1M042209J	45	65	57	52.5	FKP1O142209J

* AC voltages: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

New range and values


** PCM = Printed circuit module = pin spacing

Dims. in mm.


Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:	
Version code:	2-pin = 00
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

2-pin version

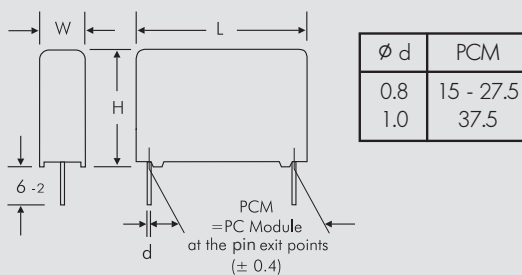

4-pin version

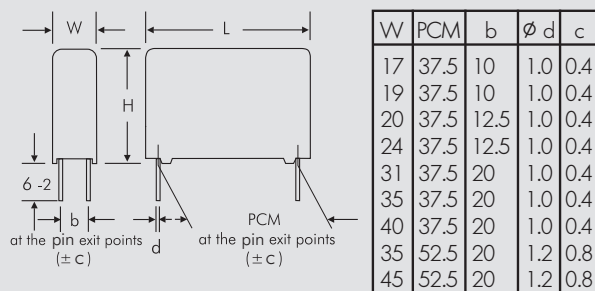

Rights reserved to amend design data without prior notification

Continuation page 75

Continuation

General Data

Capacitance	1250 VDC/600 VAC*					1600 VDC/650 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF						5	11	18	15	FKP1T001004B_____
150 "						5	11	18	15	FKP1T001504B_____
220 "						5	11	18	15	FKP1T002204B_____
330 "						5	11	18	15	FKP1T003304B_____
470 "						5	11	18	15	FKP1T004704B_____
680 "						5	11	18	15	FKP1T006804B_____
1000 pF	5	11	18	15	FKP1R011004B_____	6	12.5	18	15	FKP1T011004C_____
1500 "	5	11	18	15	FKP1R011504B_____	5	14	26.5	22.5	FKP1T011005A_____
2200 "	5	11	18	15	FKP1R012204B_____	7	14	18	15	FKP1T011504D_____
3300 "	5	11	18	15	FKP1R013304C_____	5	14	26.5	22.5	FKP1T011505A_____
4700 "	6	12.5	18	15	FKP1R014704D_____	8	15	18	15	FKP1T012204F_____
6800 "	7	14	18	15	FKP1R016804F_____	5	14	26.5	22.5	FKP1T012205A_____
	8	15	18	15	FKP1R016805A_____	6	15	26.5	22.5	FKP1T013305B_____
	5	14	26.5	22.5		7	16.5	26.5	22.5	FKP1T014705D_____
0.01 µF	7	16.5	26.5	22.5	FKP1R021005D_____	8.5	18.5	26.5	22.5	FKP1T016805F_____
0.015 "	8.5	18.5	26.5	22.5	FKP1R021505F_____	10.5	20.5	26.5	22.5	FKP1T021005H_____
0.022 "	10.5	20.5	26.5	22.5	FKP1R022205H_____	11	21	31.5	27.5	FKP1T021506B_____
0.033 "	11	21	31.5	27.5	FKP1R023306B_____	11	21	31.5	27.5	FKP1T022206B_____
	9	19	41.5	37.5	FKP1R023307A_____	13	24	31.5	27.5	FKP1T023306D_____
0.047 "	13	24	31.5	27.5	FKP1R024706D_____	13	24	41.5	37.5	FKP1T023307C_____
	11	22	41.5	37.5	FKP1R024707B_____	13	24	41.5	37.5	FKP1T024707C_____
0.068 "	11	22	41.5	37.5	FKP1R026807B_____	15	26	41.5	37.5	FKP1T026807D_____
0.1 µF	15	26	41.5	37.5	FKP1R031007D_____	17	29	41.5	37.5	FKP1T031007E_____
0.15 "	17	29	41.5	37.5	FKP1R031507E_____	20	39.5	41.5	37.5	FKP1T031507G_____
0.22 "	19	32	41.5	37.5	FKP1R032207F_____	24	45.5	41.5	37.5	FKP1T032207H_____
0.33 "	24	45.5	41.5	37.5	FKP1R033307H_____	31	46	41.5	37.5	FKP1T033307I_____
0.47 "	31	46	41.5	37.5	FKP1R034707I_____	40	55	41.5	37.5	FKP1T034707K_____
0.68 "	40	55	41.5	37.5	FKP1R036807K_____	35	50	57	52.5	FKP1T036809F_____
1.0 µF	35	50	57	52.5	FKP1R041009F_____	45	55	57	52.5	FKP1T041009H_____
1.5 "	45	65	57	52.5	FKP1R041509J_____					

* AC voltages: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

■ New values

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 148.		

Rights reserved to amend design data without prior notification

Continuation page 76

Continuation

General Data

Capacitance	2000 VDC/700 VAC~*					4000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	5	11	18	15	FKP1U001004B_-----					
150 "	5	11	18	15	FKP1U001504B_-----					
220 "	5	11	18	15	FKP1U002204B_-----					
330 "	6	12.5	18	15	FKP1U003304C_-----					
470 "	6	12.5	18	15	FKP1U004704C_-----	5	14	26.5	22.5	FKP1X004705A_-----
680 "	6	12.5	18	15	FKP1U006804C_-----	5	14	26.5	22.5	FKP1X006805A_-----
1000 pF	7	14	18	15	FKP1U011004D_-----	5	14	26.5	22.5	FKP1X011005A_-----
	5	14	26.5	22.5	FKP1U011005A_-----					
1500 "	6	15	26.5	22.5	FKP1U011505B_-----	7	16.5	26.5	22.5	FKP1X011505D_-----
2200 "	7	16.5	26.5	22.5	FKP1U012205D_-----	8.5	18.5	26.5	22.5	FKP1X012205F_-----
3300 "	7	16.5	26.5	22.5	FKP1U013305D_-----	10.5	20.5	26.5	22.5	FKP1X013305H_-----
4700 "	8.5	18.5	26.5	22.5	FKP1U014705F_-----	11	21	31.5	27.5	FKP1X014706B_-----
6800 "	10.5	20.5	26.5	22.5	FKP1U016805H_-----	13	24	31.5	27.5	FKP1X016806D_-----
0.01 µF	11	21	31.5	27.5	FKP1U021006B_-----	15	26	31.5	27.5	FKP1X021006F_-----
0.015 "	13	24	31.5	27.5	FKP1U021506D_-----	13	24	41.5	37.5	FKP1X021507C_-----
0.022 "	15	26	31.5	27.5	FKP1U022206F_-----	17	29	41.5	37.5	FKP1X022207E_-----
	13	24	41.5	37.5	FKP1U022207C_-----					
0.033 "	13	24	41.5	37.5	FKP1U023307C_-----	20	39.5	41.5	37.5	FKP1X023307G_-----
0.047 "	17	29	41.5	37.5	FKP1U024707E_-----	24	45.5	41.5	37.5	FKP1X024707H_-----
0.068 "	19	32	41.5	37.5	FKP1U026807F_-----	31	46	41.5	37.5	FKP1X026807I_-----
0.1 µF	20	39.5	41.5	37.5	FKP1U031007G_-----	35	50	41.5	37.5	FKP1X031007J_-----
0.15 "	24	45.5	41.5	37.5	FKP1U031507H_-----	40	55	41.5	37.5	FKP1X031507K_-----
0.22 "	35	50	41.5	37.5	FKP1U032207J_-----	45	55	57	52.5	FKP1X032209H_-----
0.33 "	40	55	41.5	37.5	FKP1U033307K_-----					
0.47 "	45	55	57	52.5	FKP1U034709H_-----					
0.68 "	45	65	57	52.5	FKP1U036809J_-----					

* AC voltages: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_{\text{r}}$

■ New values


** PCM = Printed circuit module = pin spacing

Dims. in mm.


Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:	
Version code:	2-pin = 00
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

2-pin version

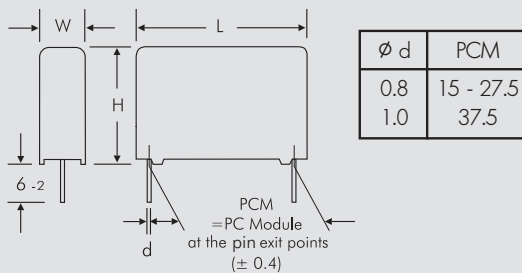

4-pin version

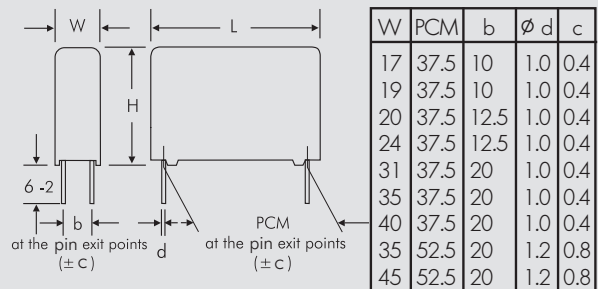

Rights reserved to amend design data without prior notification.

Continuation page 77

Continuation

General Data

Capacitance	6000 VDC/700 VAC*					Dims. in mm.
	W	H	L	PCM**	Part number	
470 pF	5	14	26.5	22.5	FKP1Y004705A	Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.
680 "	5	14	26.5	22.5	FKP1Y006805A	
1000 pF	5	14	26.5	22.5	FKP1Y011005A	
1500 "	7	16.5	26.5	22.5	FKP1Y011505D	
2200 "	10.5	20.5	26.5	22.5	FKP1Y012205H	
3300 "	10.5	20.5	26.5	22.5	FKP1Y013305H	
4700 "	11	21	31.5	27.5	FKP1Y014706B	
6800 "	13	24	31.5	27.5	FKP1Y016806D	
0.01 µF	15	26	31.5	27.5	FKP1Y021006F	
0.015 "	13	24	41.5	37.5	FKP1Y021507C	
0.022 "	17	29	41.5	37.5	FKP1Y022207E	
0.033 "	20	39.5	41.5	37.5	FKP1Y023307G	
0.047 "	24	45.5	41.5	37.5	FKP1Y024707H	
0.068 "	31	46	41.5	37.5	FKP1Y026807I	
0.1 µF	35	50	41.5	37.5	FKP1Y031007J	
0.15 "	40	55	41.5	37.5	FKP1Y031507K	
0.22 "	45	55	57	52.5	FKP1Y032209H	

Part number completion:

Version code: 2-pin = 00
 4-pin = D4

Tolerance: 20 % = M
 10 % = K
 5 % = J

Packing: bulk = S
 Pin length: 6-2 = SD

Taped version see page 148.


* AC voltages: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

■ New values

** PCM = Printed circuit module = pin spacing

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

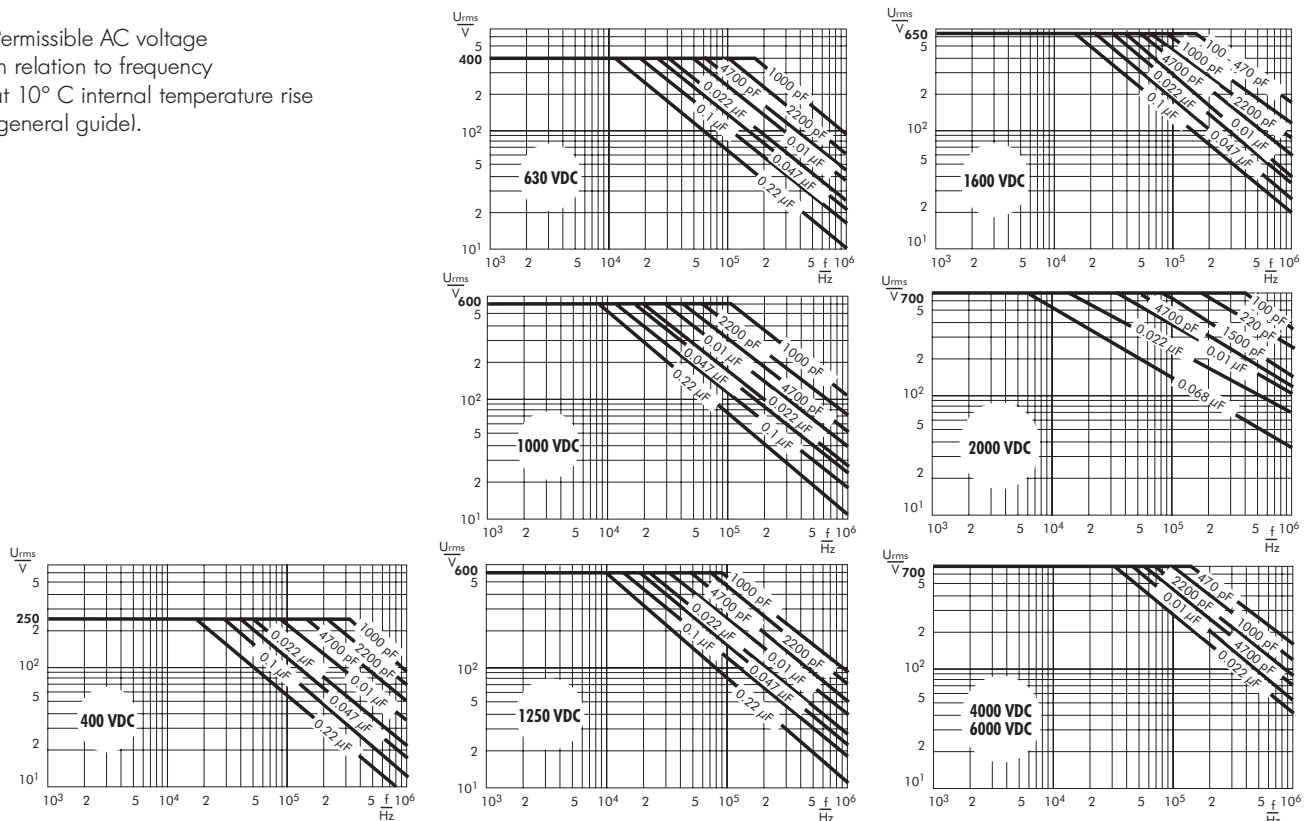

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{max.} \leq 125^{\circ}C$
soldering: $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating: $T_{max.} \leq 100^{\circ}C$
soldering: $T_{max.} \leq 110^{\circ}C$


Single wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
Dwell time: $t < 5 \text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
Dwell time: $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

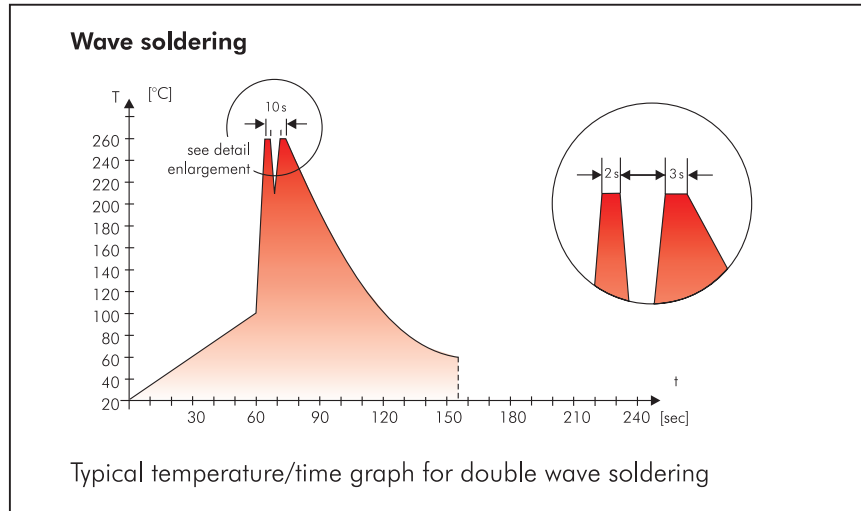

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

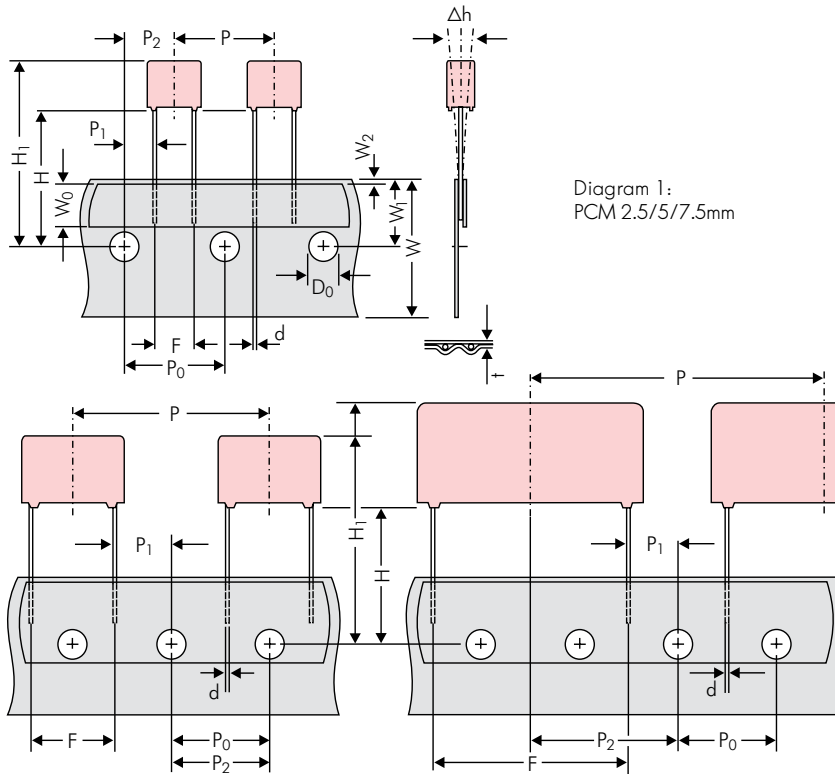


Diagram 1:
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping									
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping			
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5			
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape			
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5			
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.			
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2			
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5			
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch			
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7			
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3			
Feed hole centre to bottom edge of the component	H	16.5 ±0.3	16.5 ±0.3	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5			
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0			
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8			
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}			
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.			
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2			
Package (see also page 149)	ROLL/AMMO				AMMO						
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2	depending on comp. dimensions		REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1	B 60 ±2 68 ±2
Unit	see details page 150.										

Dims in mm.

* Diameter of pins see General Data.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

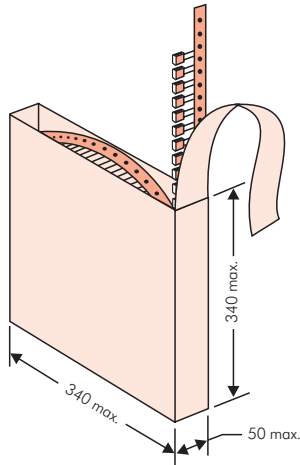

■ AMMO Packaging

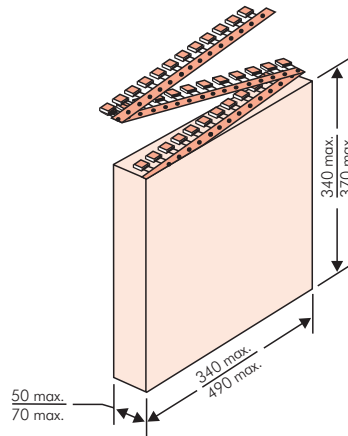

■ REEL Packaging

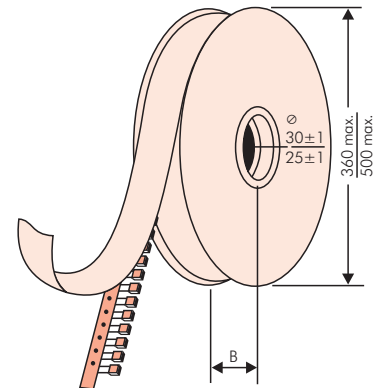

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made in Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K88D		
Handling Unit: MKS 2	QTY: 5.000	COO: DE	
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RMS		
1000067326	Standard 10% Loss - Standard	Drühte 6-2	Week 03/2011
	Vorlage Debitor Inland		

BARCODE „Code 39“



Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370		
					N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200	2500				2800		
	3	7.5	4.6	0C	5000		2000	2300				2300		
	3.8	8.5	4.6	0D	5000		1500	1800				1800		
	4.6	9	4.6	0E	5000		1200	1500				1500		
	5.5	10	4.6	0F	5000		900	1200				1200		
5 mm	2.5	6.5	7.2	1A	5000		2200	2500				2800		
	3	7.5	7.2	1B	5000		2000	2300				2300		
	3.5	8.5	7.2	1C	5000		1600	2000				2000		
	4.5	6	7.2	1D	6000		1300	1500				1500		
	4.5	9.5	7.2	1E	4000		1300	1500				1500		
	5	10	7.2	1F	3500		1100	1400				1400		
	5.5	7	7.2	1G	4000		1000	1200				1200		
	5.5	11.5	7.2	1H	2500		1000	1200				1200		
	6.5	8	7.2	1I	2500		800	1000				1000		
	7.2	8.5	7.2	1J	2500		700	1000				1000		
	7.2	13	7.2	1K	2000		700	950				1000		
	8.5	10	7.2	1L	2000		600	800				800		
	8.5	14	7.2	1M	1500		600	800				800		
11	16	7.2	1N	1000		500	600				400			
7.5 mm	2.5	7	10	2A	5000			2500	4400			2500		
	3	8.5	10	2B	5000			2200	4300			2300	4150	
	4	9	10	2C	4000			1700	3200			1700	3100	
	4.5	9.5	10.3	2D	3500			1500	2900			1400	2700	
	5	10.5	10.3	2E	3000			1300	2500			1300		
	5.7	12.5	10.3	2F	2000			1000	2200			1100		
	7.2	12.5	10.3	2G	1500			900	1800			1000		
10 mm	3	9	13	3A	3000			1100	2200					1900
	4	8.5	13.5	FA	3000			900	1600					1450
	4	9	13	3C	3000			900	1600					1450
	4	9.5	13	3D	3000			900	1600					1400
	5	10	13.5	FB	2000			700	1300					1200
	5	11	13	3F	3000			700	1300					1200
	6	12	13	3G	2400			550	1100					1000
	6	12.5	13	3H	2400			550	1100					1000
8	12	13	3I	2000			400	800					740	
15 mm	5	11	18	4B	2400			600	1200					1150
	5	13	19	FC	1000			600	1200					1200
	6	12.5	18	4C	2000			500	1000					1000
	6	14	19	FD	1000			500	1000					1000
	7	14	18	4D	1600			450	900					850
	7	15	19	FE	1000			450	900					850
	8	15	18	4F	1200			400	800					740
	8	17	19	FF	500			400	800					740
	9	14	18	4H	1200			350	700					650
	9	16	18	4J	900			350	700					650
	10	18	19	FG	500			300	650					590
11	14	18	4M	1000			300	600					540	
22.5 mm	5	14	26.5	5A	1200				800					770
	6	15	26.5	5B	1000				700					640
	7	16.5	26.5	5D	760				600					550
	8	20	28	FH	500				500					480
	8.5	18.5	26.5	5F	500				480					450
	10	22	28	FI	570*				420					380
	10.5	19	26.5	5G	594*				400					360
	10.5	20.5	26.5	5H	594*				400					360
	11	21	26.5	5I	561*				380					350
	12	24	28	FJ	480*				350					310

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5	H18.5	N	O	ø 360	ø 500	340 × 340	490 × 370	
								F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*						460/340*			420	
	11	21	31.5	6B	459*					380/280*				350	
	13	24	31.5	6D	378*					300				290	
	13	25	33	FK	405*										
	15	26	31.5	6F	324*					270				250	
	15	26	33	FL	324*										
	17	29	31.5	6G	198*										
	17	34.5	31.5	6I	198*										
	20	32	33	FM	162*										
	20	39.5	31.5	6J	162*										
37.5 mm	9	19	41.5	7A	441*										
	11	22	41.5	7B	357*										
	13	24	41.5	7C	294*										
	15	26	41.5	7D	252*										
	17	29	41.5	7E	154*										
	19	32	41.5	7F	140*										
	20	39.5	41.5	7G	126*										
	24	45.5	41.5	7H	112*										
	31	46	41.5	7I	84*										
	35	50	41.5	7J	35*										
40	55	41.5	7K	28*											
48.5 mm	19	31	56	8D	120*										
	23	34	56	8E	80*										
	27	37.5	56	8H	84*										
	33	48	56	8J	25*										
	37	54	56	8L	25*										
52.5 mm	25	45	57	9D	70*										
	30	45	57	9E	60*										
	35	50	57	9F	25*										
	45	55	57	9H	20*										
	45	65	57	9J	20*										

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

WIMA:

[FKP1-.22/630/5](#) [FKP1-.033/2KV/5](#) [FKP1-2200/2000/10P22](#) [FKP1-1000/1250/5](#) [FKP1-.033/2KV/5P37](#) [FKP1-100/2KV/5T](#) [FKP1-1000/1250/5P15](#) [FKP1O121004F00JSSD](#) [FKP1G022204D00JSSD](#) [FKP1G026805F00JSSD](#) [FKP1G026805F00KSSD](#) [FKP1G031506B00MYSD](#) [FKP1G032206D00KYSD](#) [FKP1J014704B00KSSD](#) [FKP1J016804C00JSSD](#) [FKP1J021504F00KSSD](#) [FKP1J032207D00KYSD](#) [FKP1O114704C00JSSD](#) [FKP1O122205F00KSSD](#) [FKP1O124706B00KYSD](#) [FKP1O124706B00MYSD](#) [FKP1O132207F00MYSD](#) [FKP1R014704D00MSSD](#) [FKP1R031007D00JYSD](#) [FKP1R031507E00JYSD](#) [FKP1R032207F00KYSD](#) [FKP1T001004B00MSSD](#) [FKP1T001504B00KSSD](#) [FKP1T002204B00KSSD](#) [FKP1T004704B00MSSD](#) [FKP1T011504D00KSSD](#) [FKP1T012204F00JSSD](#) [FKP1T013305B00JSSD](#) [FKP1T013305B00KSSD](#) [FKP1T014705D00JSSD](#) [FKP1T016805F00JSSD](#) [FKP1T024707C00KYSD](#) [FKP1T031007E00JYSD](#) [FKP1U002204B00JSSD](#) [FKP1U003304C00JSSD](#) [FKP1U011004D00KSSD](#) [FKP1U011005A00KSSD](#) [FKP1U011505B00JSSD](#) [FKP1U021006B00KYSD](#) [FKP1U024707E00KYSD](#) [FKP1X004705A00JSSD](#) [FKP1X012205F00JSSD](#) [FKP1X021006F00KYSD](#) [FKP1X021507C00MYSD](#) [FKP1Y021006F00KYSD](#) [FKP1Y022207E00MYSD](#) [FKP1T001004B00KSSD](#) [FKP1Y004705A00JSSD](#) [FKP1G032206D00JYSD](#) [FKP1G024705D00JSSD](#) [FKP1U013305D00JSSD](#) [FKP1T006804B00JSSD](#) [FKP1R021005D00JSSD](#) [FKP1T026807D00JYSD](#) [FKP1R026807B00KYSD](#) [FKP1X022207E00JYSD](#) [FKP1J031006D00JYSD](#) [FKP1J032207D00JYSD](#) [FKP1J022205D00KSSD](#) [FKP1U022207C00JYSD](#) [FKP1U016805H00JYSD](#) [FKP1R031007D00KYSD](#) [FKP1G031005H00JYSD](#) [FKP1T002204B00JSSD](#) [FKP1R031507E00KYSD](#) [FKP1U021006B00JYSD](#) [FKP1J014704B00JSSD](#) [FKP1U023307C00JYSD](#) [FKP1R022205H00JYSD](#) [FKP1R012204B00KSSD](#) [FKP1J022205D00JSSD](#) [FKP1R032207F00JYSD](#) [FKP1U001004B00JSSD](#) [FKP1T021506B00JYSD](#) [FKP1R023306B00JYSD](#) [FKP1U014705F00JSSD](#) [FKP1O123305H00KYSD](#) [FKP1T001504B00JSSD](#) [FKP1T031007E00KYSD](#) [FKP1O113304B00JSSD](#) [FKP1R011504B00KSSD](#) [FKP1T022206B00JYSD](#) [FKP1T003304B00JSSD](#) [FKP1R024706D00JYSD](#) [FKP1R021505F00JSSD](#) [FKP1Y022207E00JYSD](#) [FKP1T021005H00JYSD](#) [FKP1T004704B00JSSD](#) [FKP1T023306D00JYSD](#) [FKP1G021004B00JSSD](#) [FKP1O116804D00JSSD](#) [FKP1O124706B00JYSD](#) [FKP1U013305D00KSSD](#) [FKP1R021005D00KSSD](#) [FKP1U022206F00JYSD](#)