



TYS80406R8M-10

PHYSICAL DIMENSIONS:

A	8.00	±	0.30
B	8.00	±	0.30
C	4.00	±	0.20
D	2.45	±	0.30
E	3.10	±	0.30

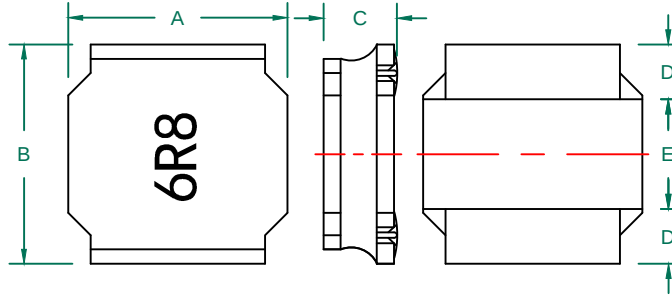



RECOMMENDED SOLDERING CONDITIONS

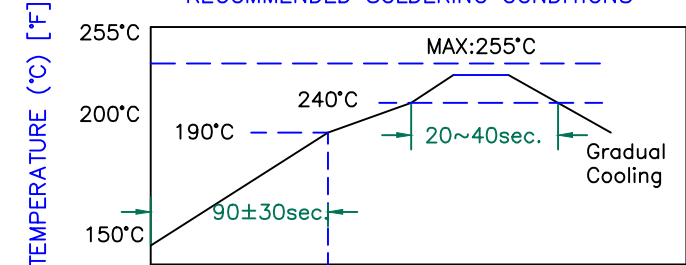


ELECTRICAL SPECIFICATION

	Min	Nom	Max
INDUCTANCE (uH) L @ 100 KHz/1V ±20%	5.44	6.80	8.16
DCR (Ω)		0.024	0.0312


Saturation Current(A)	4.55
SRF (MHz)	20
Temperature Rise Current (A)	3.60



CHARACTERISTICS OF TEMPERATURE RISE

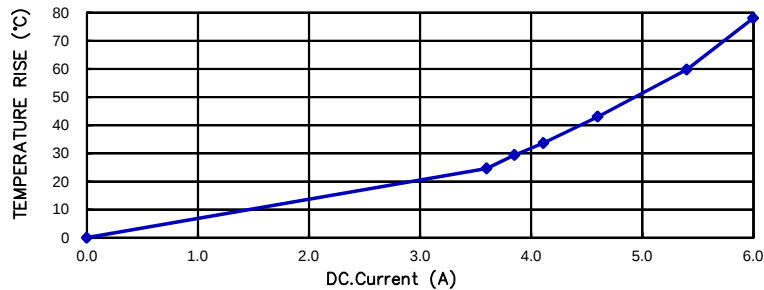

CURRENT VS INDUCTANCE DROP IN RATES

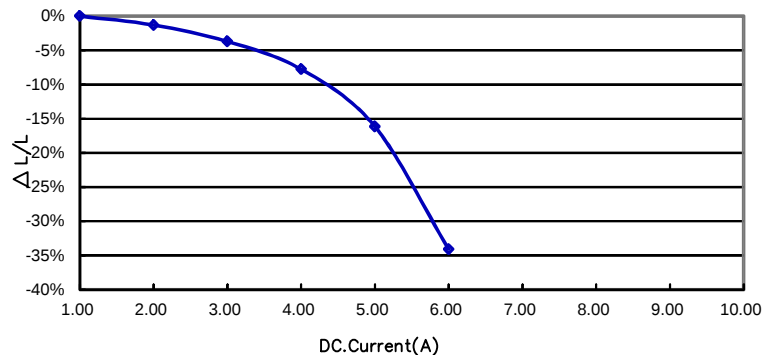

RoHS

NOTES:

1. OPERATION TEMPERATURE RANGE: -40°C~+125°C (INCLUDING SELF-HEATING).
2. STORAGE TEMPERATURE RANGE (PACKAGING CONDITIONS): -10°C TO +40°C AND RH 70% (MAX.)
3. UNLESS OTHERWISE SPECIFIED, THE STANDARD ATMOSPHERIC CONDITIONS FOR MEASUREMENT/TEST AS:
A. AMBIENT TEMPERATURE: 20±15°C.
B. RELATIVE HUMIDITY: 65%±20%.
4. SATURATION CURRENT IS THE DC CURRENT AT WHICH THE INDUCTANCE DROPS OFF APPROXIMATELY 30% FROM ITS VALUE WITHOUT CURRENT.(AMBIENT TEMPERATURE 25±5°C)
5. TEMPERATURE RISE CURRENT (IRMS):
DC CURRENT THAT CAUSES THE TEMPERATURE RISE (ΔT ≤40°C) FROM 25°C AMBIENT.

DIMENSIONS ARE IN mm .				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
C	CHANGE DIMENSIONS C/D/E	08/18/16	QIU	TYS80406R8M-10	C	POWER INDUCTOR	QIU
B	CHANGE TEMP. FROM -25°C~+125°C	12/26/12	QIU	DATE:	06/01/12	SCALE:	NTS
A	ORIGINAL DRAFT	06/01/12	QIU	CAD #		TOL #	
REV	DESCRIPTION	DATE	INT	TYS80406R8M-10-C			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird:

[TYS80406R8M-10](#)