


DESCRIPTION: HIGH DENSITY FEMALE - VERTICAL DIP - LOW PROFILE - STAMPED

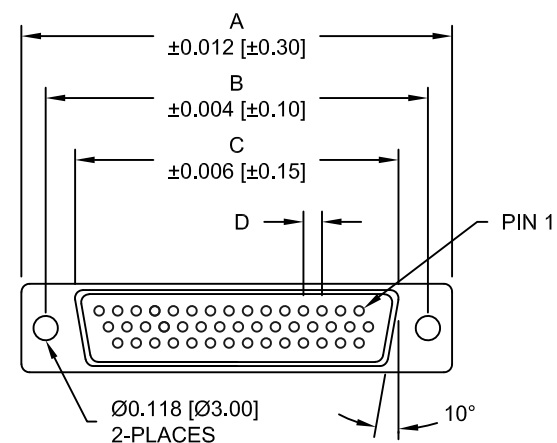



MATERIAL:

SHELL: STEEL, NICKEL PLATED
INSULATOR: PBT, UL 94V-O RATED, 230°C PROCESS TEMP
CONTACT: BRASS, GOLD FLASH ENTIRE CONTACT

ELECTRICAL:

CURRENT RATING: 2 AMPS
WITHSTANDING VOLTAGE: 1,000VAC AT
CONTACT RESISTANCE: 10 mOhms Max.
INSULATION RESISTANCE: 5,000 MOhms min.
VOLTAGE: 500VAC FOR 1 MINUTE
TEMPERATURE: -55° C TO +125° C

DIMENSIONS				
SIZE	A	B	C	D
15	30.80	24.99	16.34	2.29
	1.213	0.984	0.643	0.090
26	39.20	33.32	24.70	2.29
	1.543	1.312	0.972	0.090
44	53.00	47.04	38.40	2.29
	2.087	1.852	1.512	0.090
62	69.40	63.50	55.80	2.41
	2.732	2.500	2.197	0.095
78	67.00	61.10	52.20	2.41
	2.638	2.406	2.055	0.095

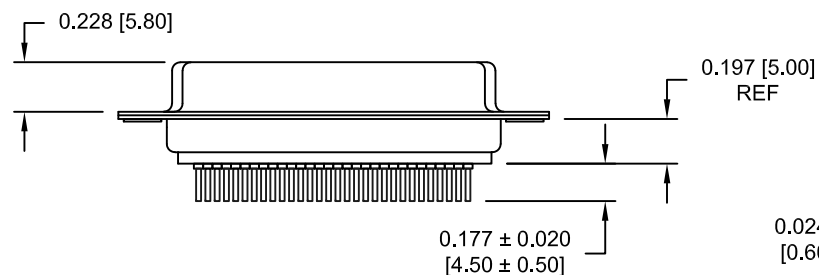

195-YYY-2 1 3 L YY 1

SERIES
POSITIONS
015
026
044
062
078
GENDER
2 = FEMALE
TERMINATION
1 = PC MOUNT
SHELL PLATING
3 = NICKEL
RoHS COMPLIANT
LOW PROCESS TEMP. - 230°C
HARDWARE OPTIONS
00 = NO HARDWARE
03 = 4-40 HEX STANDOFFS
55 = 4-40 INSERTS
PLATING OPTIONS
1 = GOLD FLASH

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
09/12/05

NorComp


SCALE:
NTS

DWG NO.


SHEET OF
1 3

REV
6


195-YYY-213LYY1

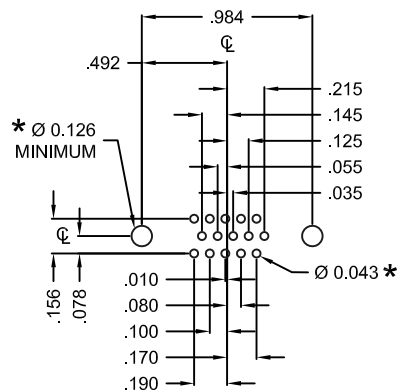


15 POSITION

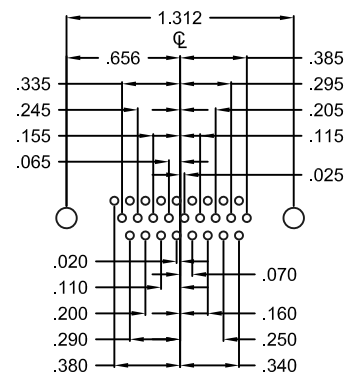

26 POSITION

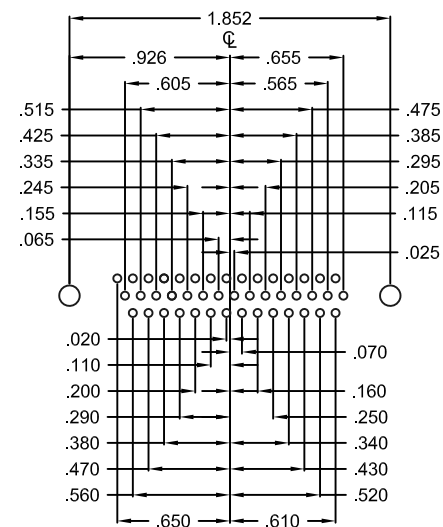

44 POSITION

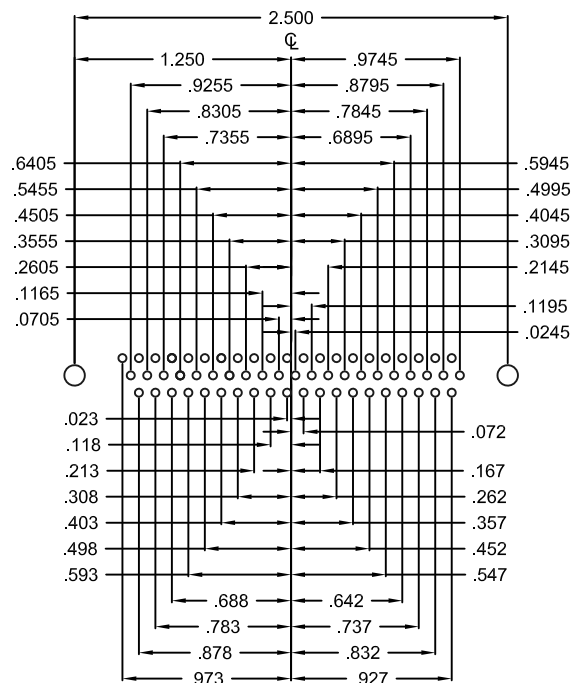


62 POSITION

HOLE PATTERN SHOWN
ARE FOR FEMALE

UNITS = inch

* TYP.
SUGGESTED SIZE
MAY NOT BE SUITABLE FOR ALL APPLICATIONS

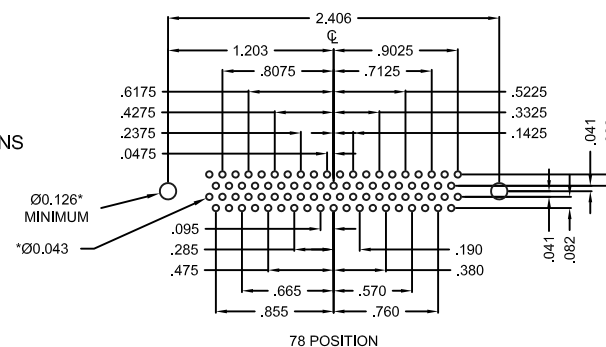

78 POSITION

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
09/12/05

NorComp

SCALE:
NTS

DWG NO.

SHEET OF
2 3


REV
6

195-YYY-213LYY1


DESCRIPTION: HARDWARE

TOLERANCE:
ALL DIMENSIONS ARE ± 0.010 [0.25]

03X 0.158" (BOARD SIDE) - 0.230" MATING SIDE

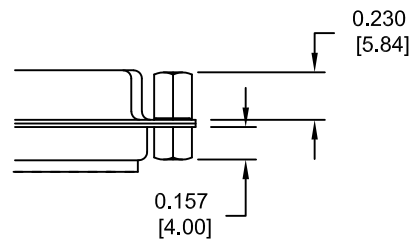

55X 0.158" (BOARD SIDE)



RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		SCALE: NTS	SHEET 3	OF 3	REV 6
		DATE: 09/12/05		DWG NO. 195-YYY-213LYY1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

[195-015-213L001](#) [195-026-213L001](#) [195-044-213L001](#) [195-062-213L001](#) [195-062-213L551](#) [195-078-213L001](#)