

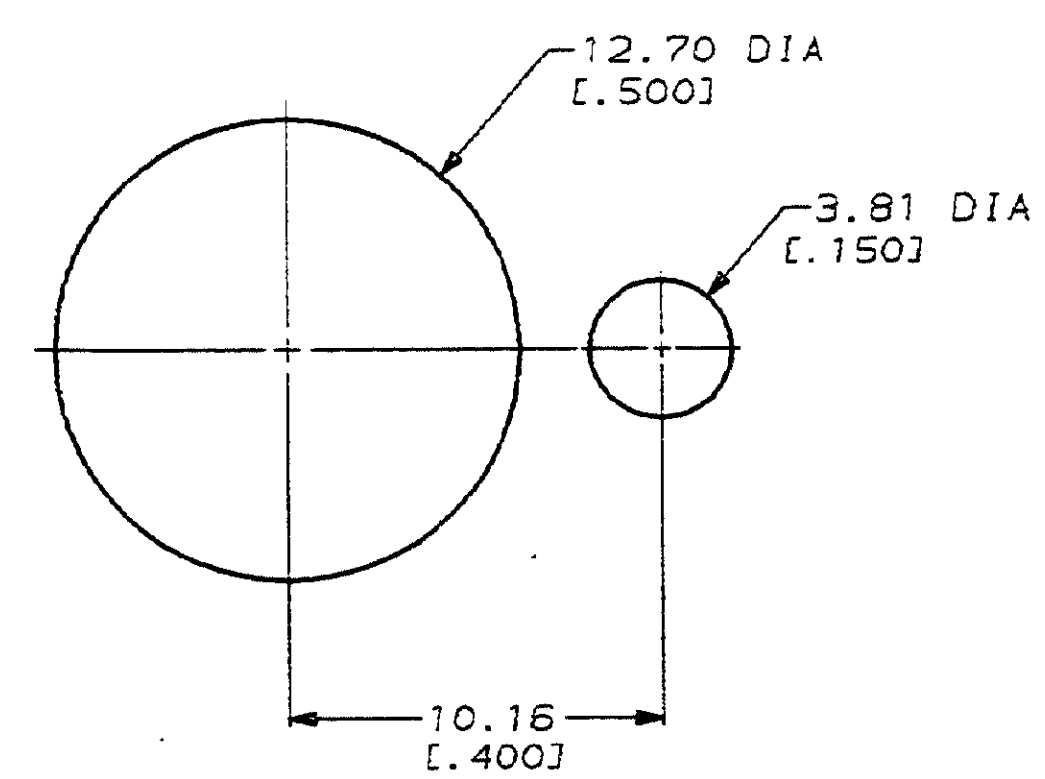
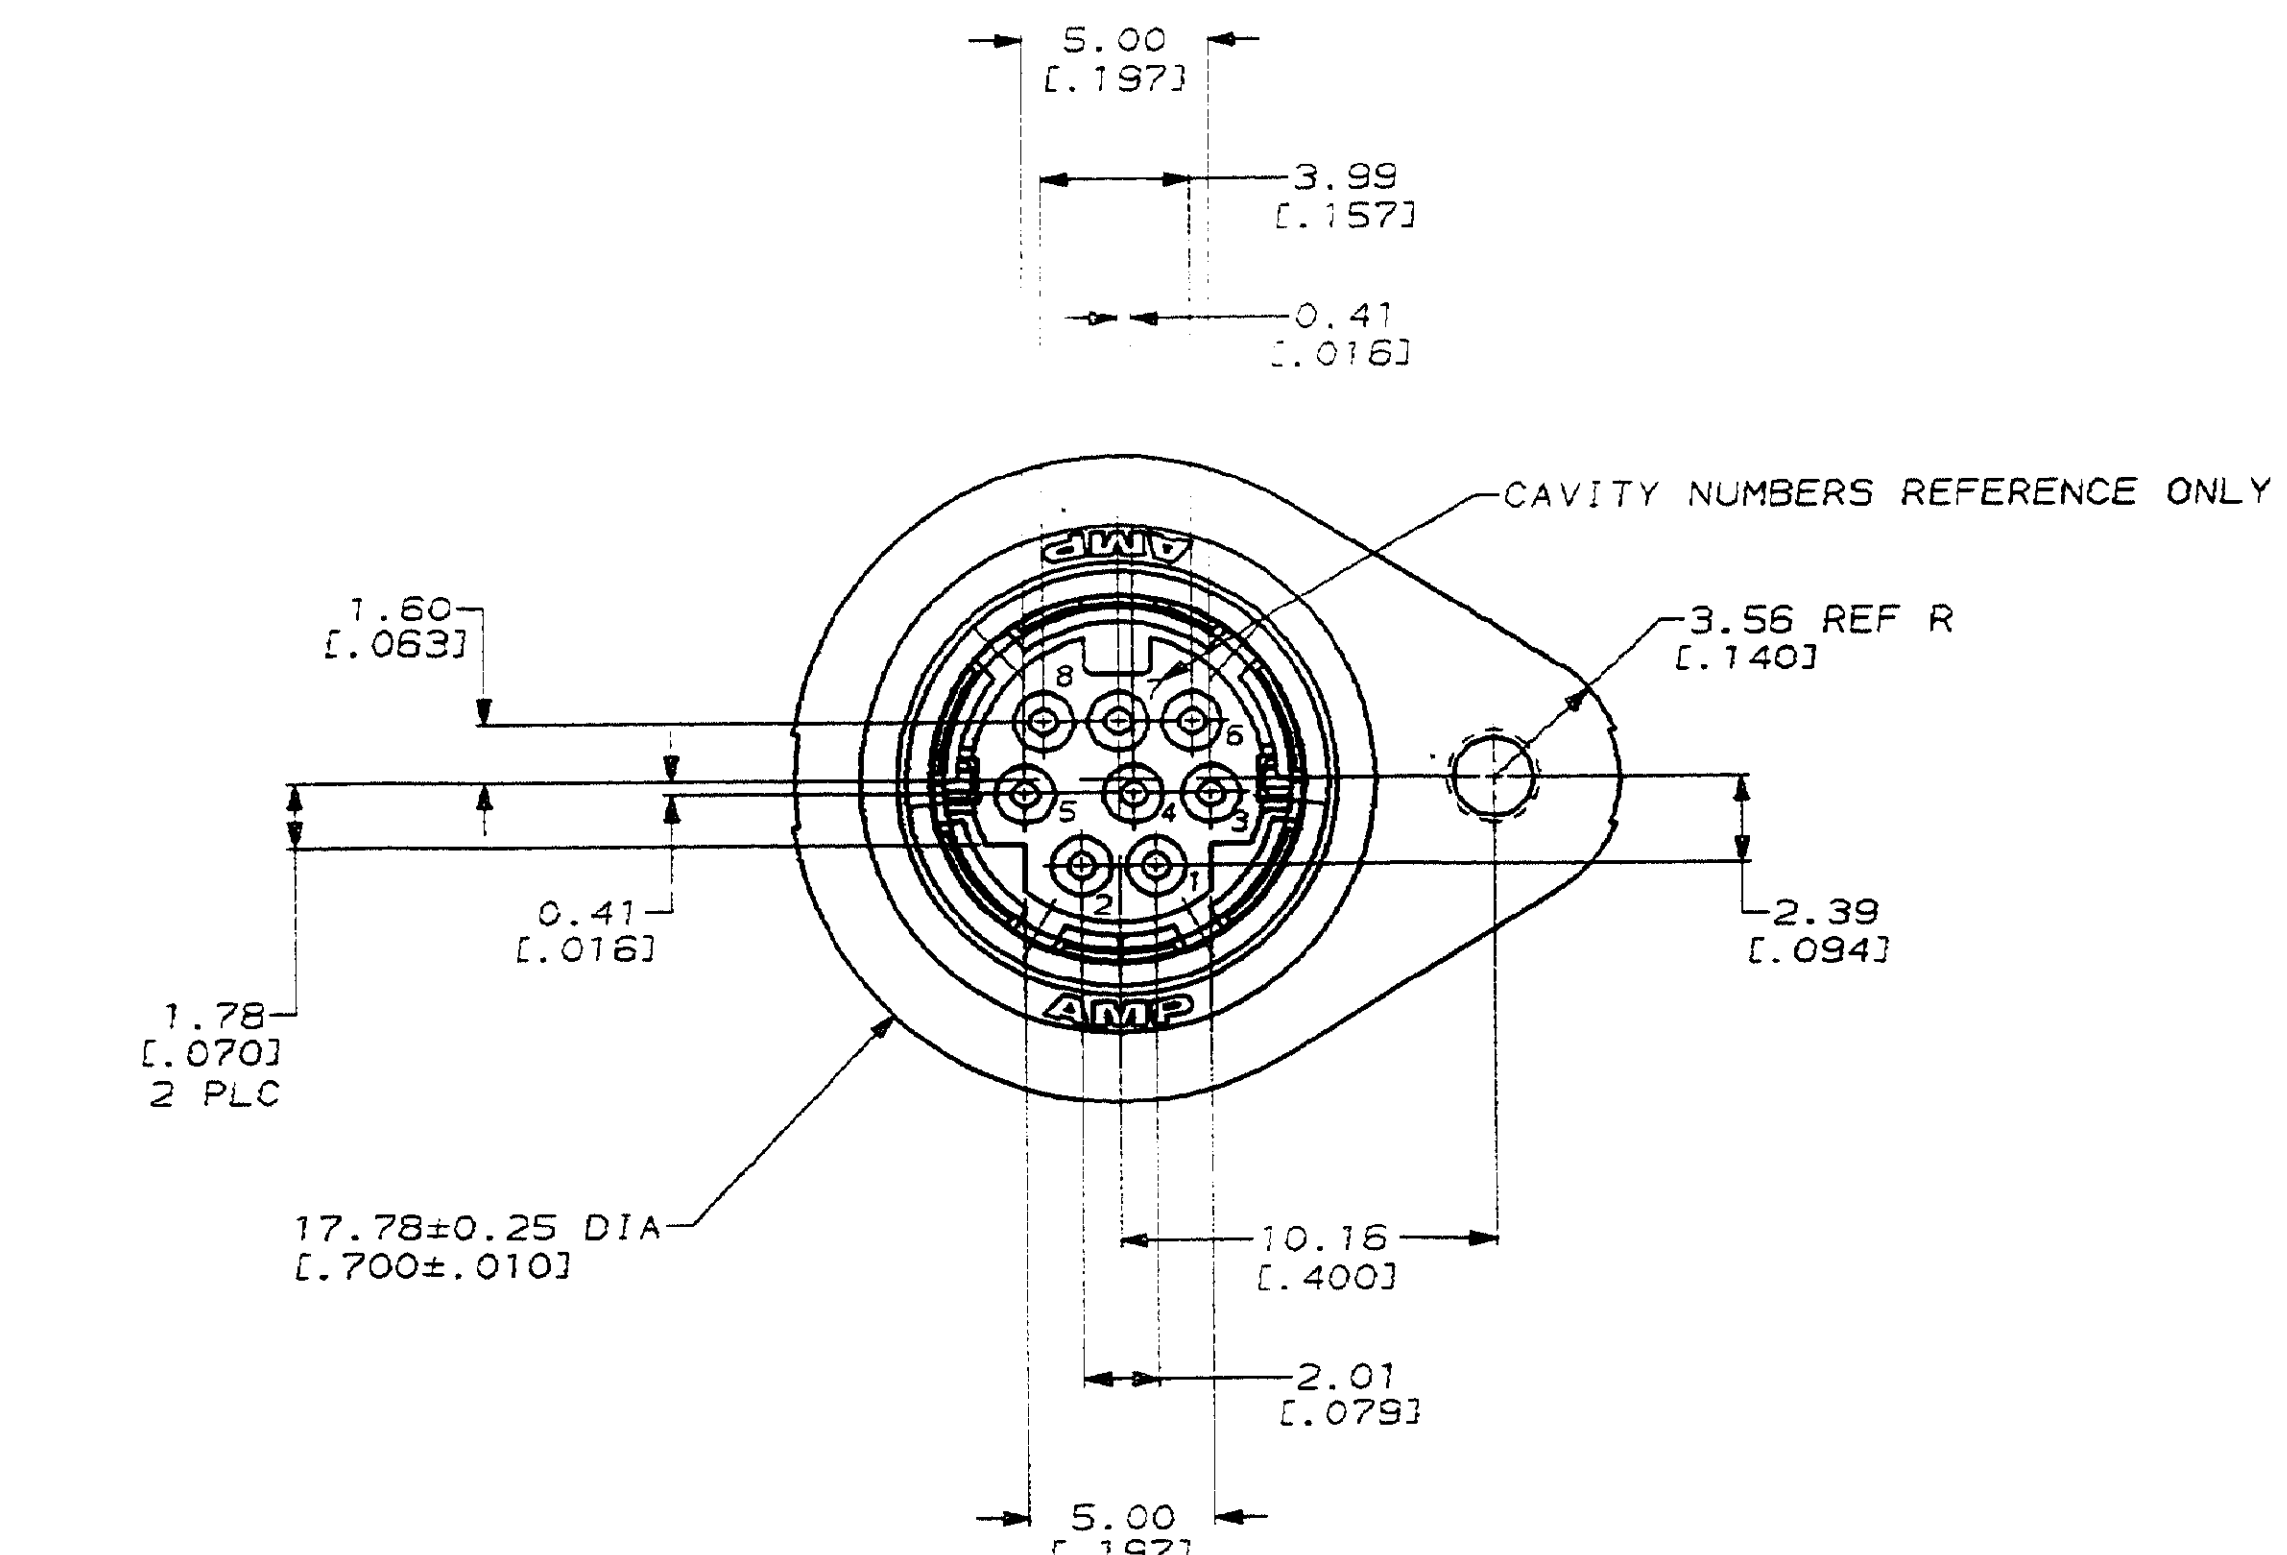


MOD	LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
18	BD	39	P					
			0			RLSE WAS 89-4837-14-1 & -2, NPR 2960	8-90	
			A			REVISED PER ECN BD4681	02/08/91	

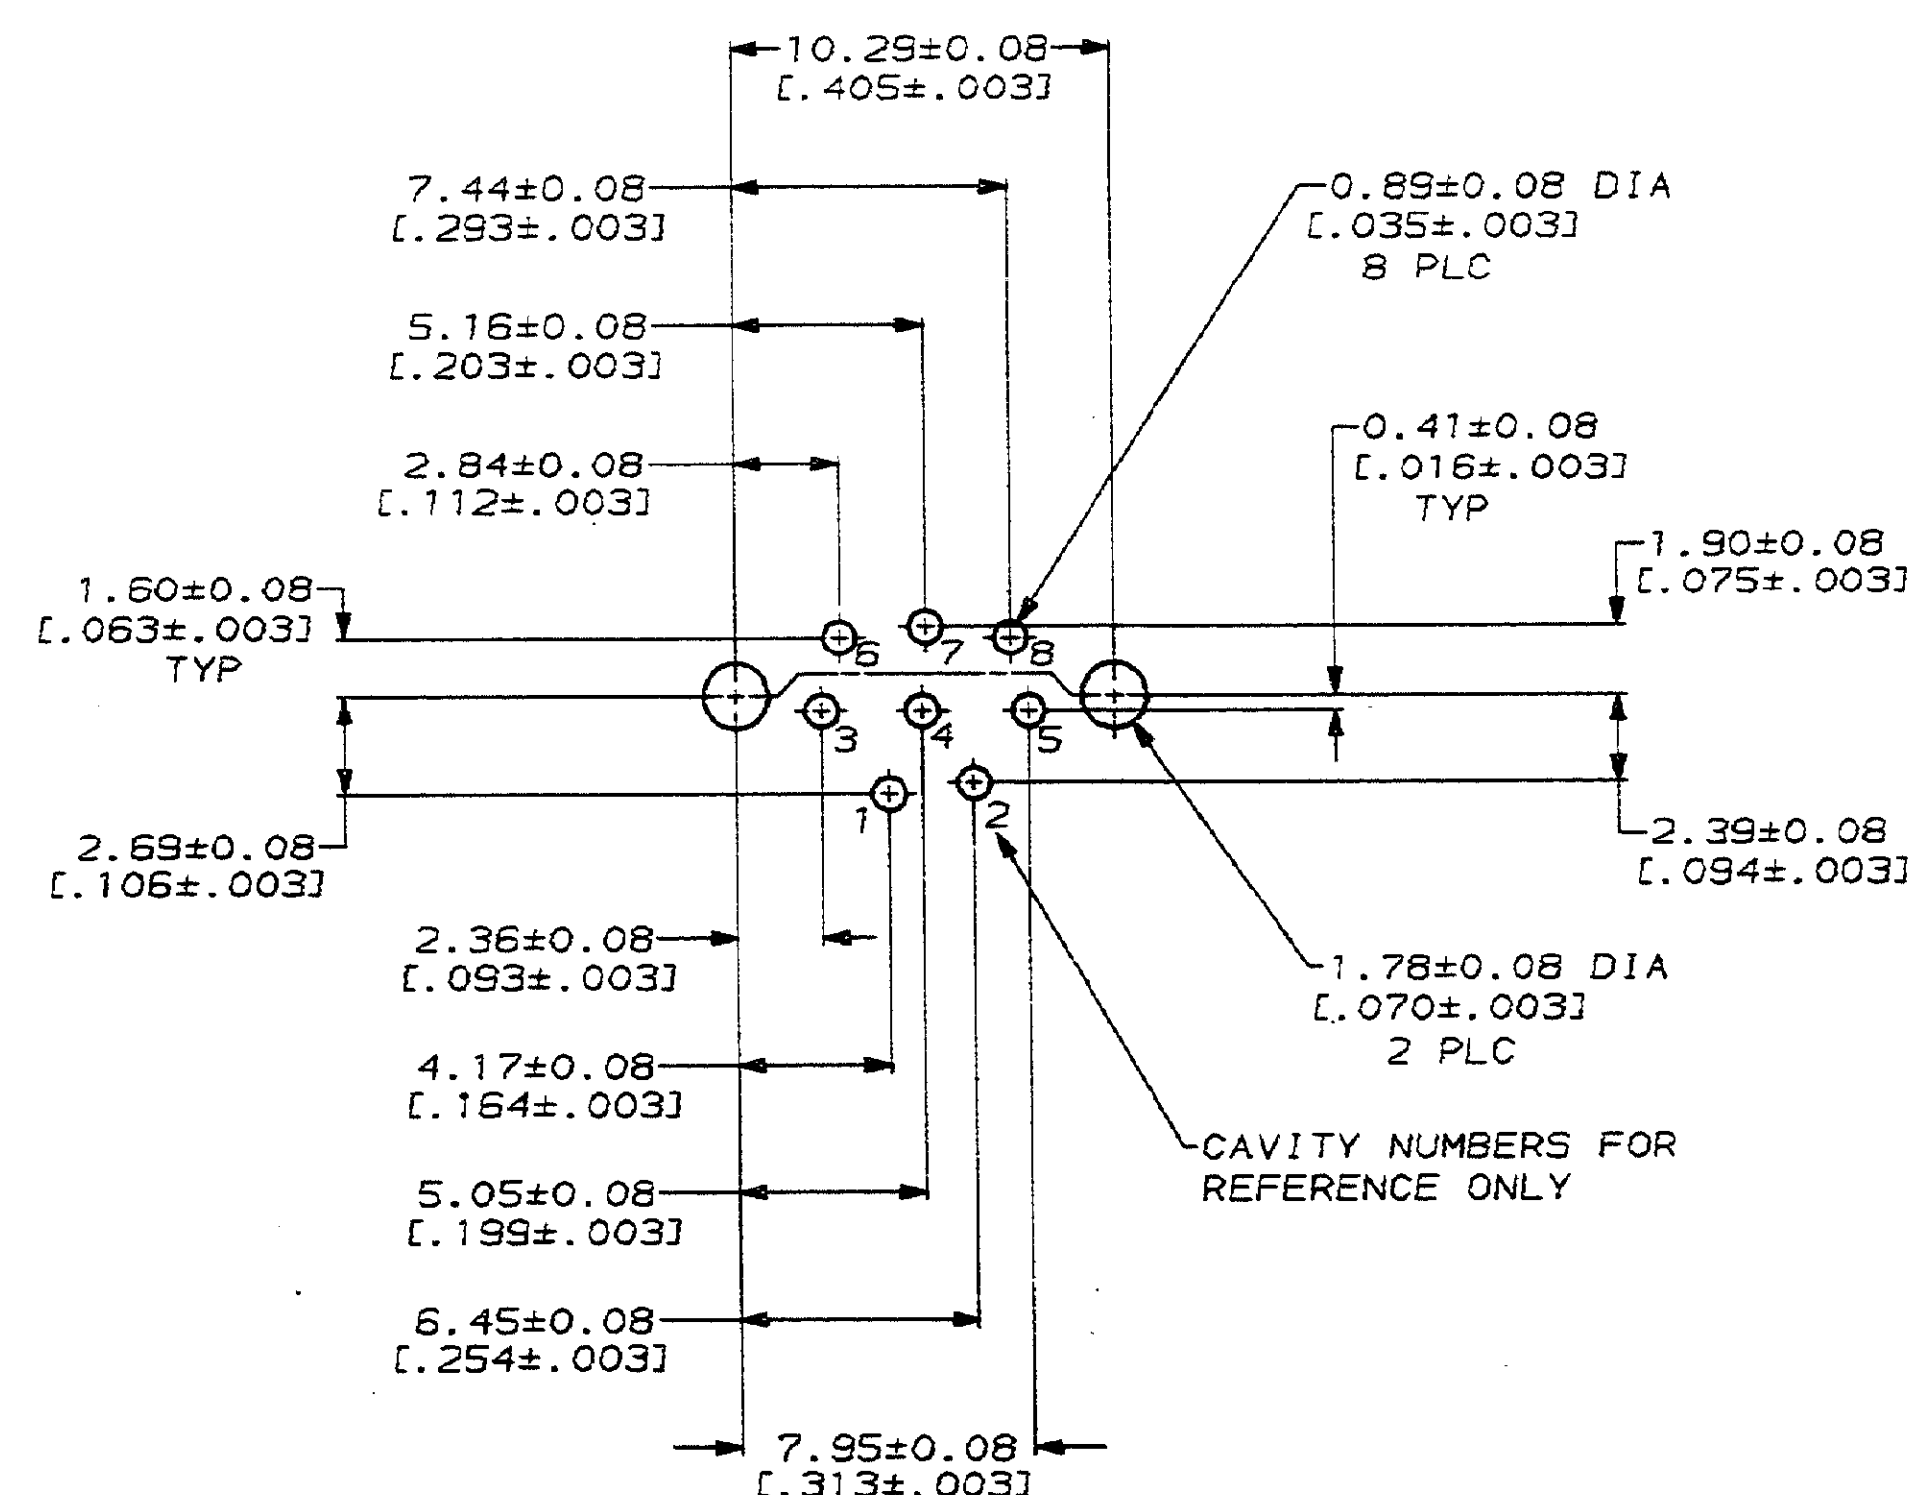


RECOMMENDED PANEL CUT-OUT

- 1 SHELLS: BRASS; CONTACTS: PHOSPHOR BRONZE; HOUSING: POLYESTER, UL 94V-0 RATED, BLACK.
- 2 0.76 μ m [L.000030] MIN GOLD ON MATING END FOR A LENGTH OF 1.37 [L.054] MIN ON INSIDE, 2.54 μ m [L.000100] MIN TIN-LEAD FOR A LENGTH OF 3.30 [L.130] MIN FROM OPPOSITE END, ALL OVER 1.27 μ m [L.000050] MIN NICKEL.
- 3 0.38 μ m [L.000015] MIN GOLD ON MATING END FOR A LENGTH OF 1.37 [L.054] MIN ON INSIDE, 2.54 μ m [L.000100] MIN TIN-LEAD FOR A LENGTH OF 3.30 [L.130] MIN FROM OPPOSITE END, ALL OVER 1.27 μ m [L.000050] MIN NICKEL.
- 4 2.54 μ m [L.000100] MIN TIN-LEAD OVER 1.27 μ m [L.000050] MIN NICKEL.
- 5 GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290, COPPER PLATING PER MIL-C-14550.
- 6 RECEPTACLE ASSEMBLY MATES WITH 8 PIN, 8.99±0.10 [L.354±.004] DIAMETER PLUG.
- 7 3.81 μ m [L.000150] MIN TIN-LEAD OVER 2.54 μ m [L.000100] MIN COPPER.

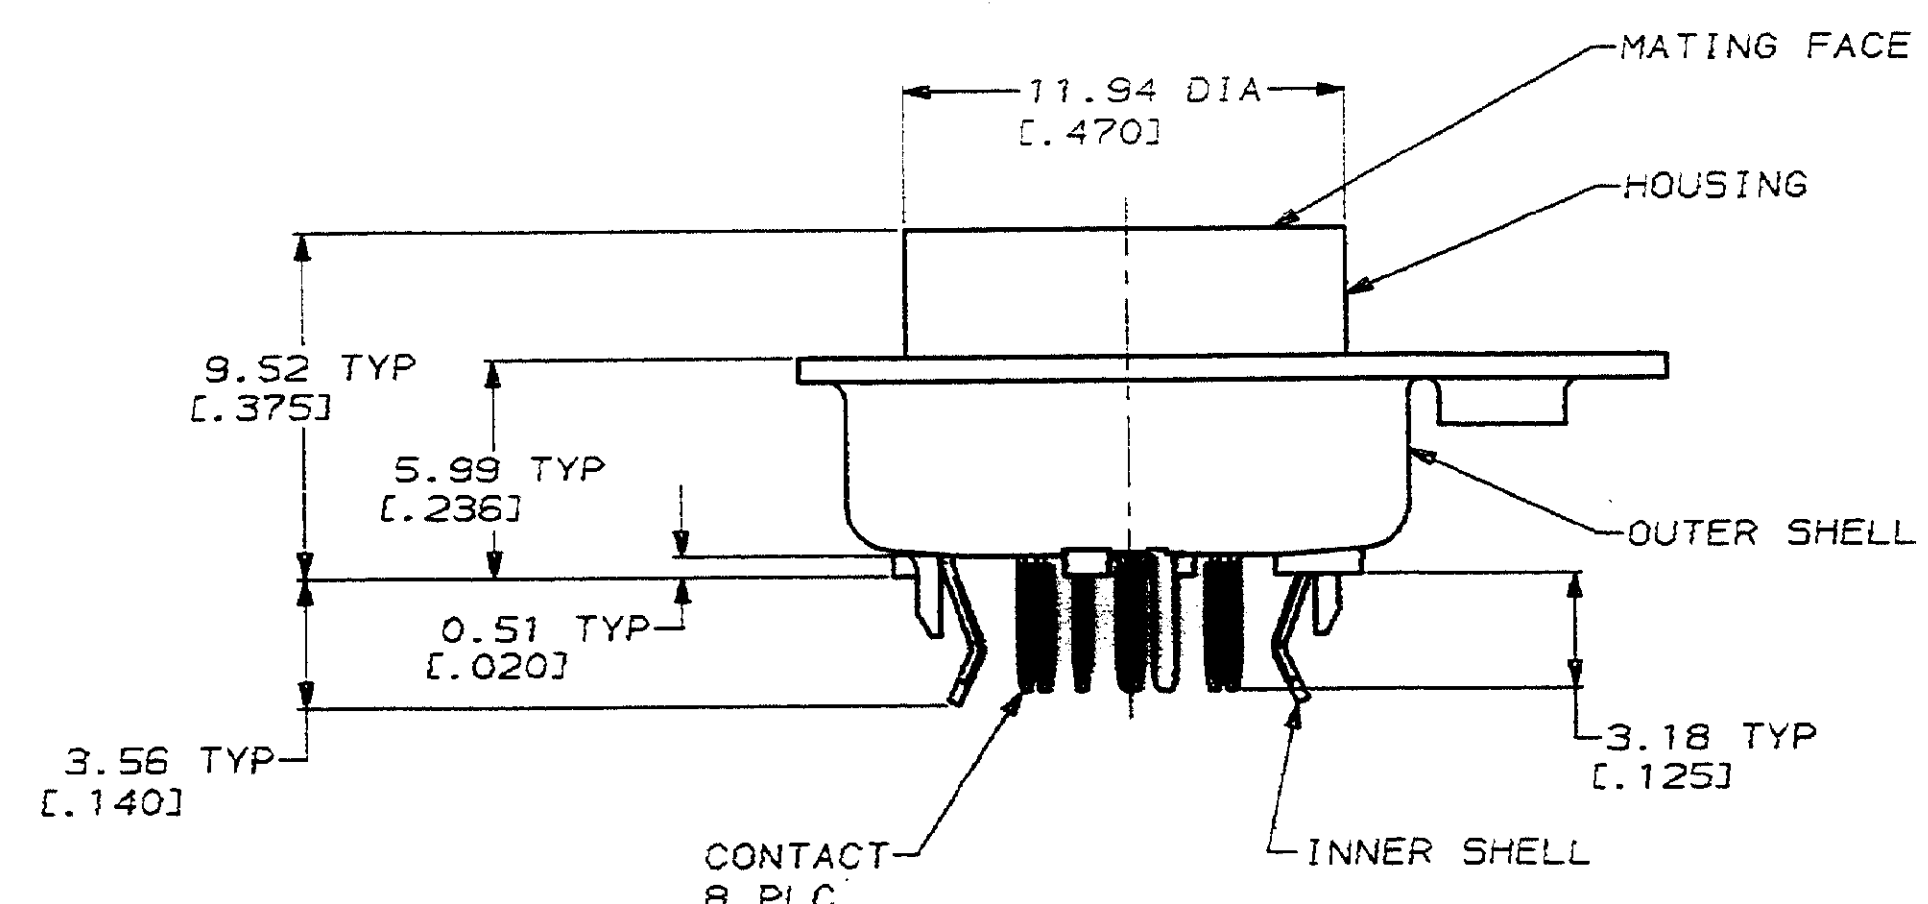

RECOMMENDED PC BOARD LAYOUT
BOTTOM VIEW

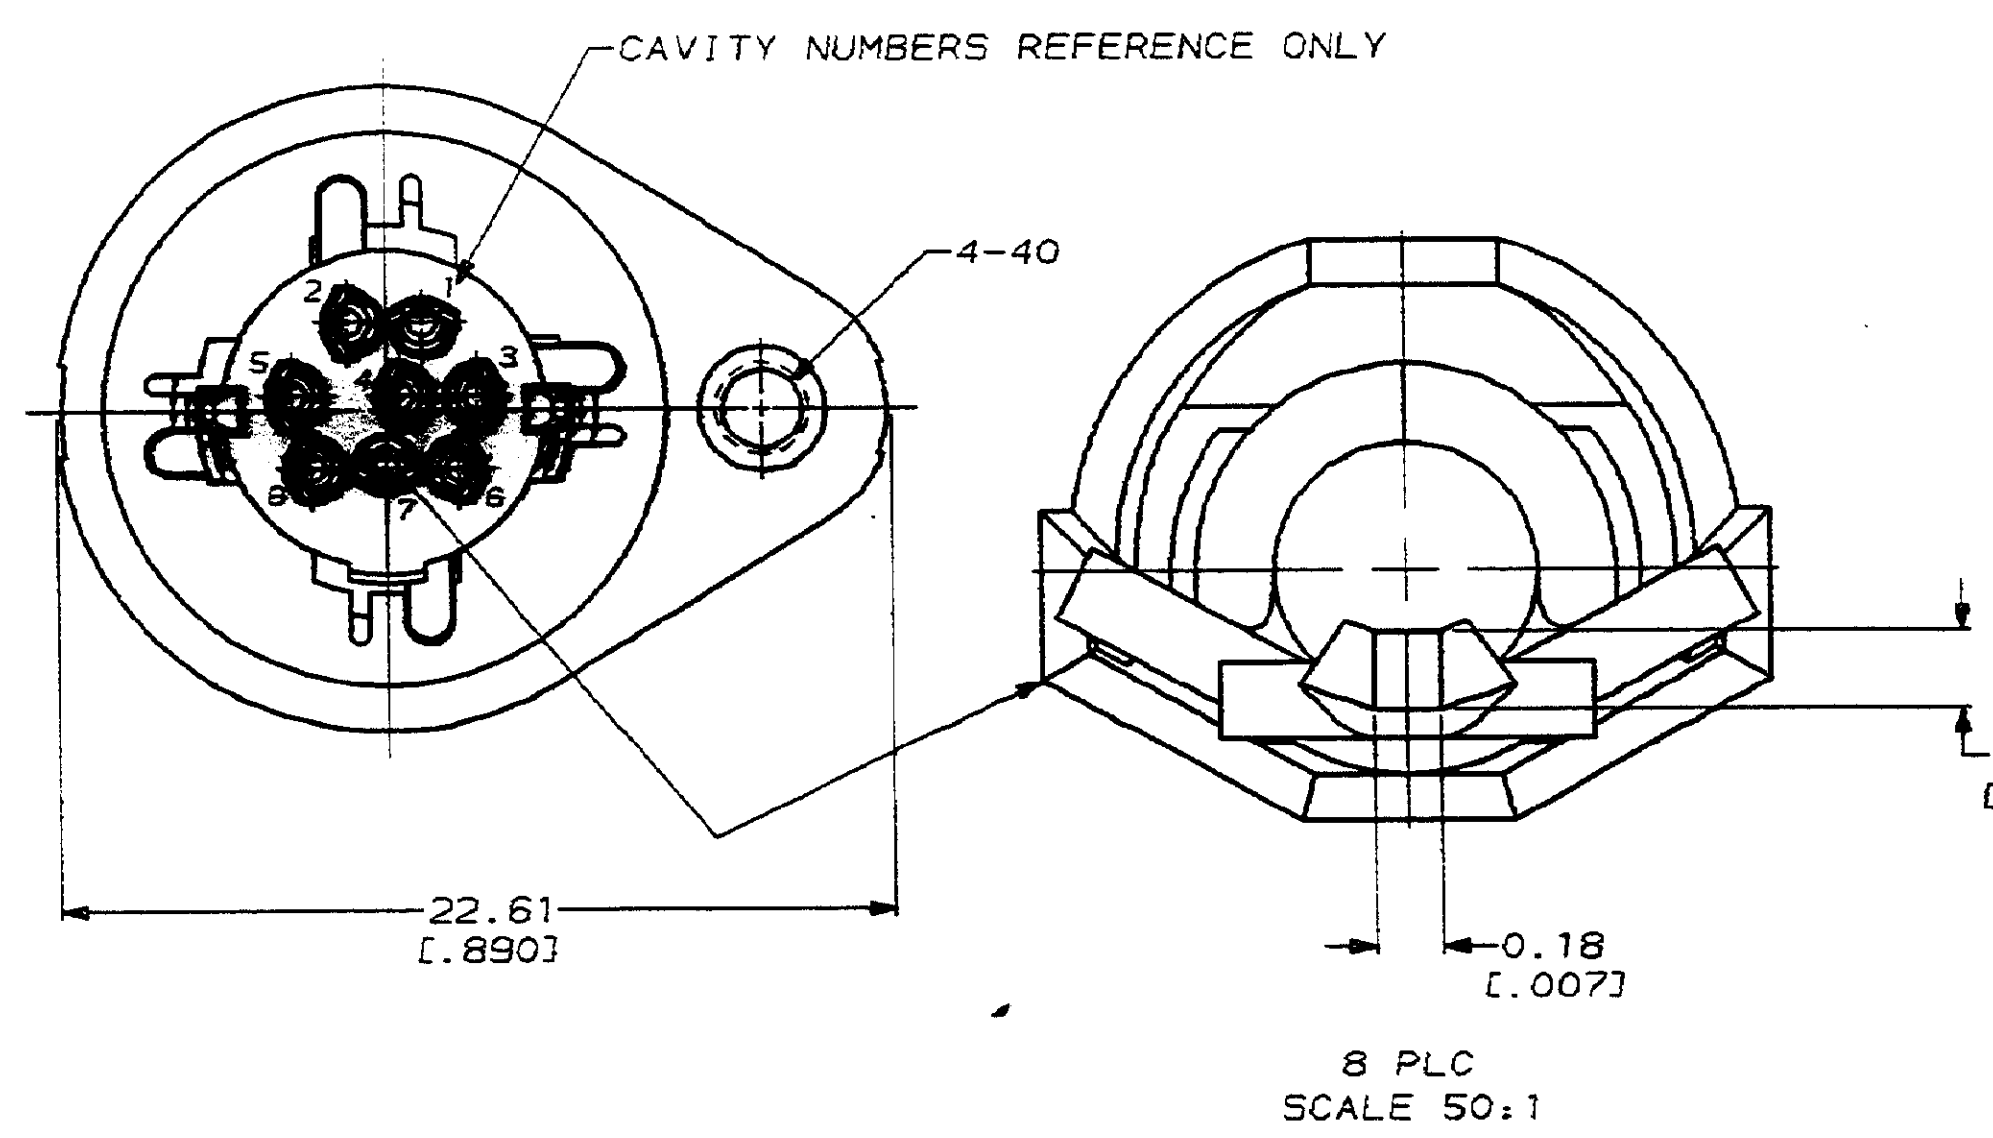

2	750340-2
3	750340-1
CONTACT FINISH	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.13 [L.005] 3 PLC DEC ± - ANGLES ± - MATERIAL	DR 8-4-90 J McCLINTON CHK 9-5-90 R STONE APPD 9-5-90 R WHYNE APPD 9-10-90 J FULPONI PRODUCT SPEC -	AMP AMP Incorporated Harrisburg, PA 17105-3608
FINISH: 1 SHELL: 2 CONTACTS: SEE TABLE INNER SHELL: 3 OUTER SHELL: 4	APPLICATION SPEC - WEIGHT -	NAME RECEPTACLE ASSEMBLY, 8 POSN, LOW FLANGE, SHIELDED, VERTICAL, MINIATURE CIRCULAR DIN
	SIZE D	CAGE CODE 00779
	SCALE 5:1	DRAWING NO 750340
		SHEET 1 OF 1

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[750340-1](#)