


(1.27 mm) .050"

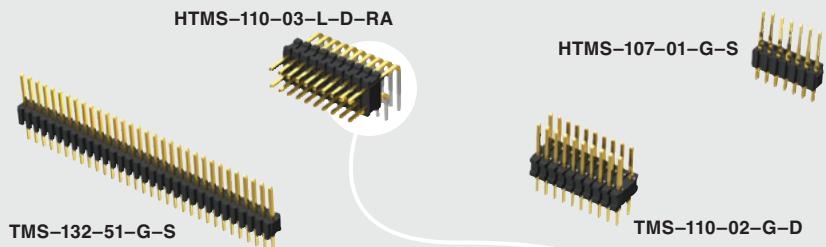

TMS, HTMS, SNM SERIES

# THROUGH-HOLE MICRO HEADER

## SPECIFICATIONS

For complete specifications see [www.samtec.com?TMS](http://www.samtec.com?TMS), [www.samtec.com?HTMS](http://www.samtec.com?HTMS) or [www.samtec.com?SNM](http://www.samtec.com?SNM)

**Insulator Material (TMS):** Black Liquid Crystal Polymer

**Insulator Material (SNM):** Black Glass Filled Polyester

**Terminal Material:** Phosphor Bronze

**Plating:** Au or Sn over

50  $\mu$ " (1.27  $\mu$ m) Ni

**Current Rating:** 5 A per pin

(2 pins powered)

TMS mated with SMS

**Operating Temp Range:**

-55  $^{\circ}$ C to +105  $^{\circ}$ C with Tin;

-55  $^{\circ}$ C to +125  $^{\circ}$ C with Gold

**Lead Size accepted (SNM):** (0.46 mm) .018" SQ

**Insertion Depth (SNM):** (3.43 mm) .135" minimum

**Max Processing Temp (SNM):** Not recommended for IR/VP

**RoHS Compliant:**

Yes

**Important Note:**  
Style -02 does not mate with SMS Series.

## PROCESSING

**Lead-Free Solderable:**  
Yes

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



FILE NO. E111594


## ALSO AVAILABLE (MOQ Required)

- Other platings


**Note:** Some lengths, styles and options are non-standard, non-returnable.

Mates with:  
SMS, SLM, RSM

## MICRO SHUNT SNM SERIES




Part No.	Plating
SNM-100-BK-T	Tin
SNM-100-BK-G	10 $\mu$ " (0.25 $\mu$ m) Gold

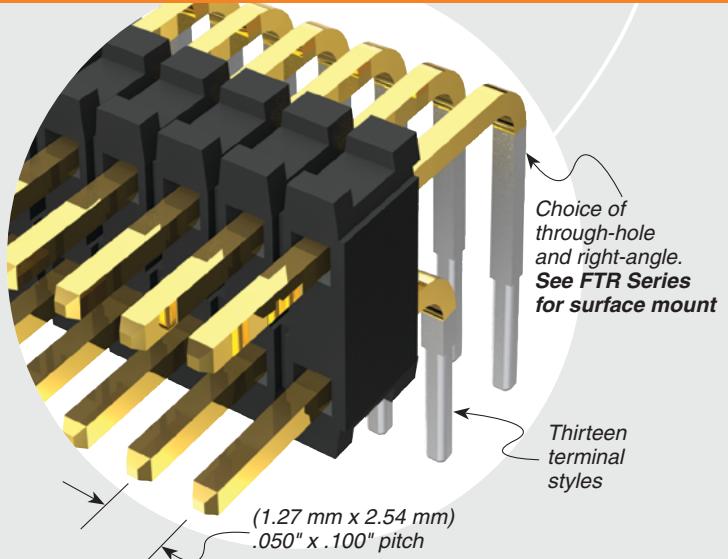


TYPE	STRIP	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OPTION
TMS	= Standard	01 thru 50	Specify LEAD STYLE from chart	-L = 10 $\mu$ " (0.25 $\mu$ m) Gold on post, Matte Tin on tail	-S = Single Row	-RA = Right-angle
HTMS	= High Temp			-G = 10 $\mu$ " (0.25 $\mu$ m) Gold on post, Gold flash on tail	-D = Double Row	-"XXX" = Polarized Position (Specify position of omitted pin)


T/H LEAD STYLE	A	B	C
-01	(11.43) .450	(5.84) .230	(3.05) .120
-02	(8.13) .320	(2.54) .100	
-21	(12.83) .505	(5.84) .230	(4.45) .175
-51	(10.41) .410	(4.83) .190	
-52	(10.80) .425	(5.21) .205	
-53	(12.83) .505	(7.24) .285	
-54	(14.10) .555	(8.51) .335	
-55	(15.49) .610	(9.91) .390	
-56	(15.88) .625	(10.29) .405	(3.05) .120
-57	(16.51) .650	(10.92) .430	
-58	(17.91) .705	(12.32) .485	
-59	(19.18) .755	(13.59) .535	
-60	(20.96) .825	(15.37) .605	

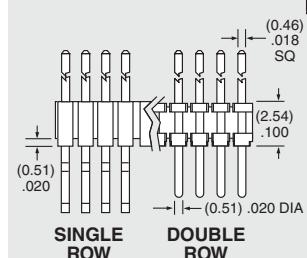

T/H LEAD STYLE	A	B	C
-01	(5.84) .230		
-02	(2.54) .100		
-21	(5.84) .230		
-51	(4.83) .190		
-52	(5.21) .205		
-53	(7.24) .285		
-54	(8.51) .335		
-55	(9.91) .390		
-56	(10.29) .405		
-57	(10.92) .430		
-58	(12.32) .485		
-59	(13.59) .535		
-60	(15.37) .605		

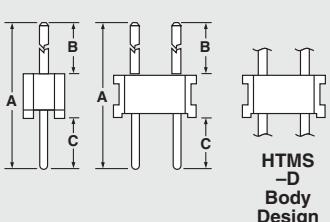

RA LEAD STYLE	B
-01	(5.84) .230
-02	(2.54) .100
-03	(3.18) .125



Due to technical progress, all designs, specifications and components are subject to change without notice.

**WWW.SAMTEC.COM**

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec](#):

[TMS-125-53-G-D](#)