

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED,  
ONE CONDUCTOR, SHIELDED, JACKETED, LIGHTWEIGHT

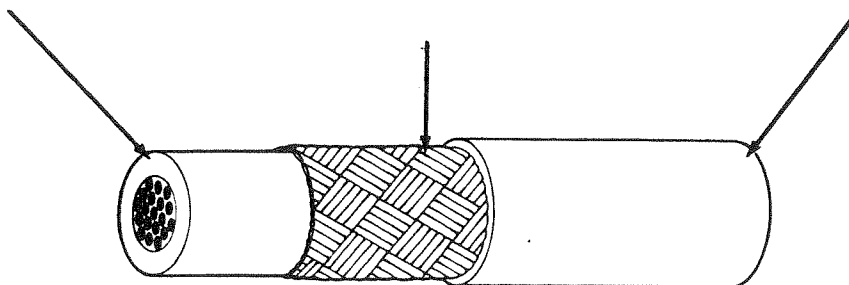
28 February 1985

150°C

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRE - 55A0114

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,  
MODIFIED ETFE

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL 1/	NOMINAL 1/	MAXIMUM	
			55A1114-30-*	30	38	.006	
55A1114-28-*	28	38	.006	.008	.060	.065	3.9
55A1114-26-*	26	38	.006	.008	.065	.070	4.6
55A1114-24-*	24	38	.006	.008	.070	.075	5.5
55A1114-22-*	22	38	.006	.008	.076	.081	6.9
55A1114-20-*	20	38	.006	.008	.084	.089	9.0
55A1114-18-*	18	38	.006	.008	.094	.099	12.0
55A1114-16-*	16	38	.006	.008	.102	.108	14.6

1/ Nominal values are for information only. Nominal values are not requirements.

## CABLE RATINGS AND ADDITIONAL REQUIREMENTS

## TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 7 hours

BLOCKING: 200 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts, 60 Hz

## FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum);

no flaming of facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 psi (minimum)

## JACKET FLAWS:

Spark Test, 1000 volts, 60 Hz (rms), 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: 300 ± 3°C for 6 hours

VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend, and Thermal Shock)

1000 volts, 60 Hz, 1 minute

## PART NUMBER:

The "\*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681 with a dash separating the component wire color from the jacket color.

Example:

AWG 20, white component wire, white jacket:  
55A1114-20-9-9.

**Raychem**

Raychem Corporation  
300 Constitution Drive, Menlo Park, California 94025  
415) 361 3333 TWX 910 373 1205

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TE Connectivity:

[55A1114-26-9-9CS1939](#) [55A1114-24-9-9](#) [55A1114-26-9-9CS2275](#) [55A1114-22-9-9CS2275](#) [55A1114-22-6-9](#)  
[55A1114-24-9-9CS2275](#) [55A1114-26-9-9CS2275F](#)