

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0877153909

Status:


Active

Overview:

Edge Card Connectors

Description:

1.00mm Pitch Edgecard Connector, 230 Circuits, Nylon 4/6 Glass-filled, Black Housing, Phosphor Bronze, 0.38µm Gold Solder-tail, Lead-Free

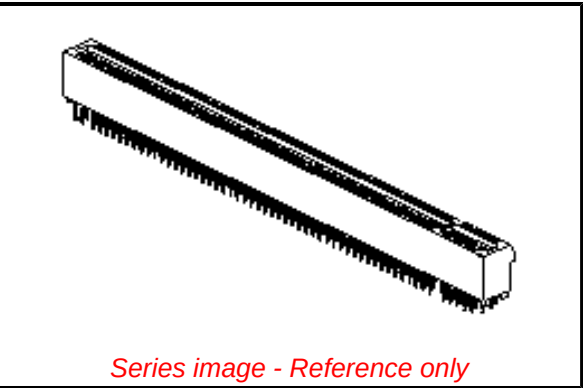

Documents:	
3D Model	Packaging Specification PK-87715-202-001 (PDF)
Drawing (PDF)	Test Summary TS-87715-202-001 (PDF)
Product Specification PS-87715-202-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
General	
Product Family	Edge Card Connectors
Series	87715
Comments	Not a PCI Standard Part, Not a PCI Standard Part
Component Type	Edgecard to PCB
Data Rate	8.0 Gbps
Edge Card Thickness	1.57mm
Electrical Model	Yes
High Power Bay (30.0A or more)	No
Orientation	Vertical
Overview	Edge Card Connectors
Product Name	Edge Card
Standard Based	General
UPC	822348517909
Physical	
(p)ower-(s)ignal Configuration	230s - 0p
Circuit Size Range	201-294 Circuits
Circuits (Loaded)	230
Circuits (maximum)	230
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Keying to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Net Weight	11.600/g
PC Tail Length	3.00mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.40mm
Packaging Type	Tray
Pitch - Mating Interface	1.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	0.381µm
Polarized to Mating Part	Yes
Temperature Range - Operating	65°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	1.1A
Voltage - Maximum	50V AC (RMS)/DC

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/71/2019 (16 July 2019)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

87715 Series

Mates With

1.00mm Thick Memory Module

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Electrical Model Document	EE-87715-004, EE-87715-011, EE-87715-012, EE-87715-013, EE-87715-014
Packaging Specification	PK-87715-202-001
Product Specification	PS-87715-202-001
S-Parameter Model	SP-87715-004, SP-87715-011, SP-87715-012, SP-87715-013, SP-87715-014
Sales Drawing	SD-87715-202
Test Summary	TS-87715-202-001

This document was generated on 10/11/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[87715-3909](#)