

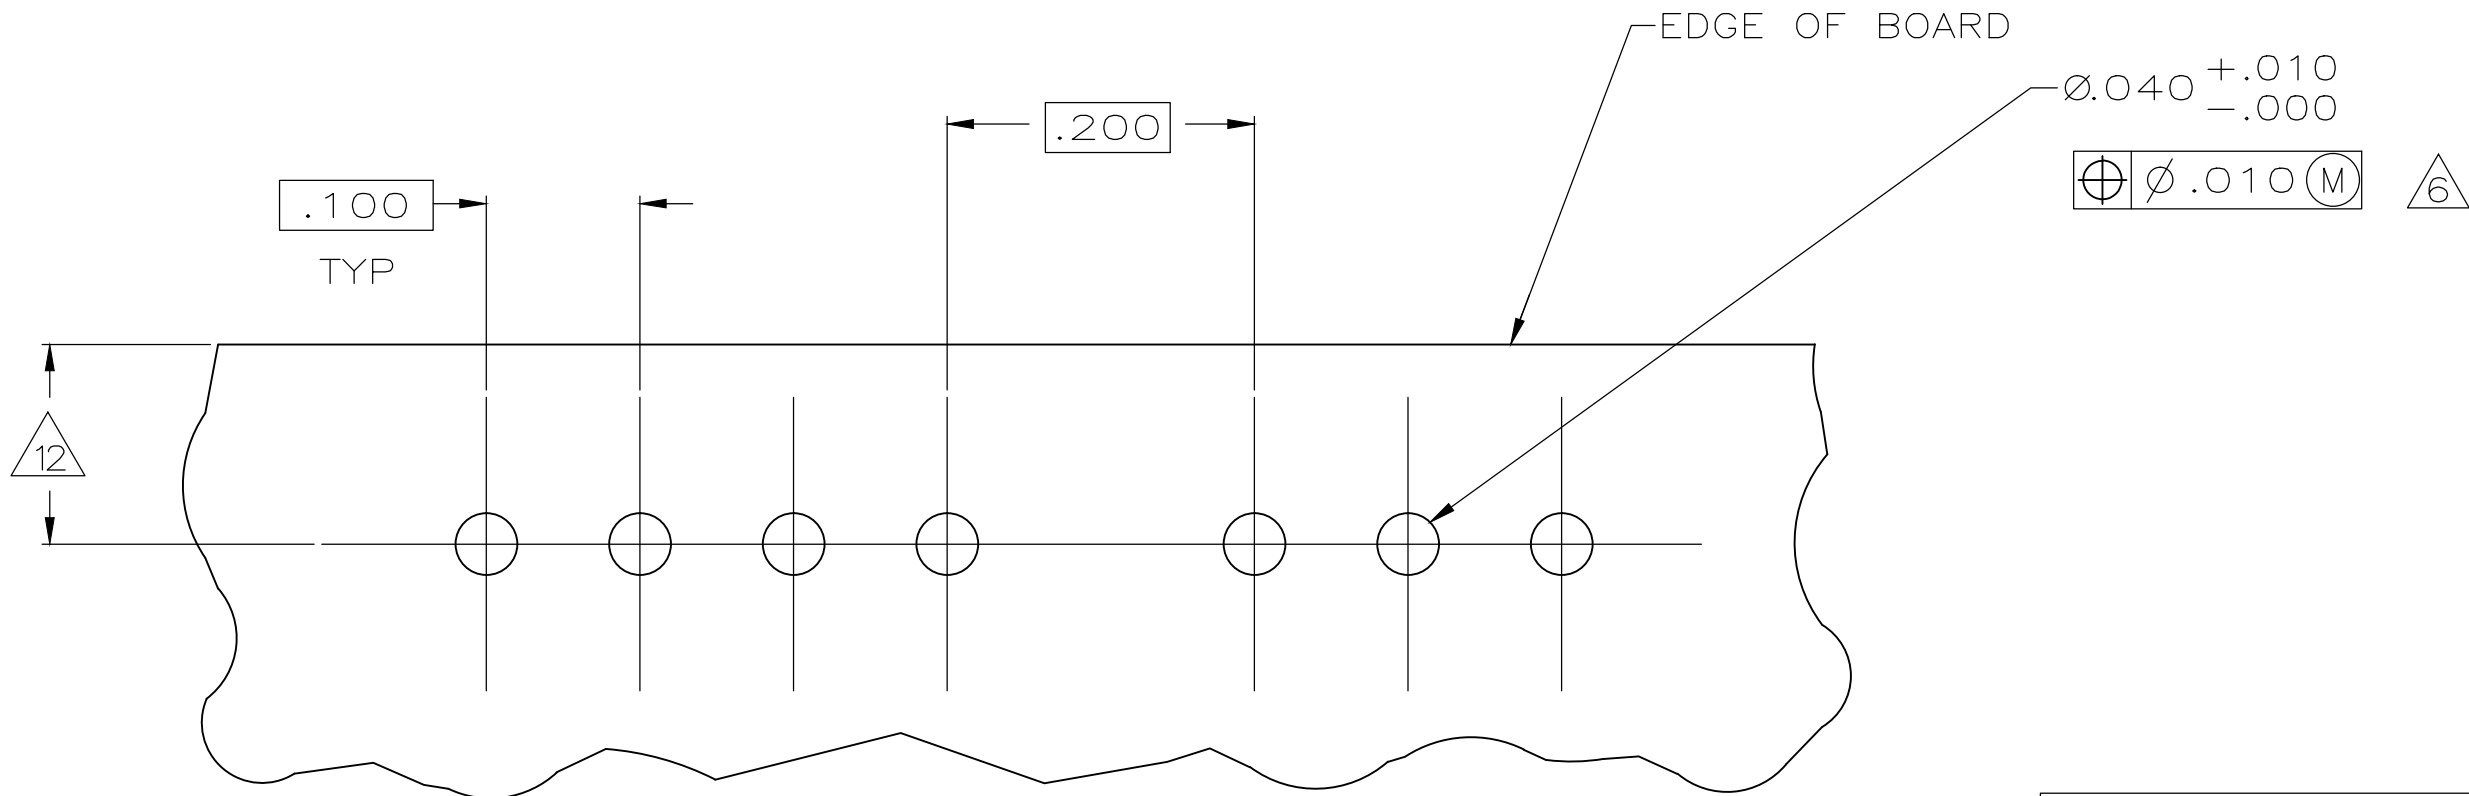
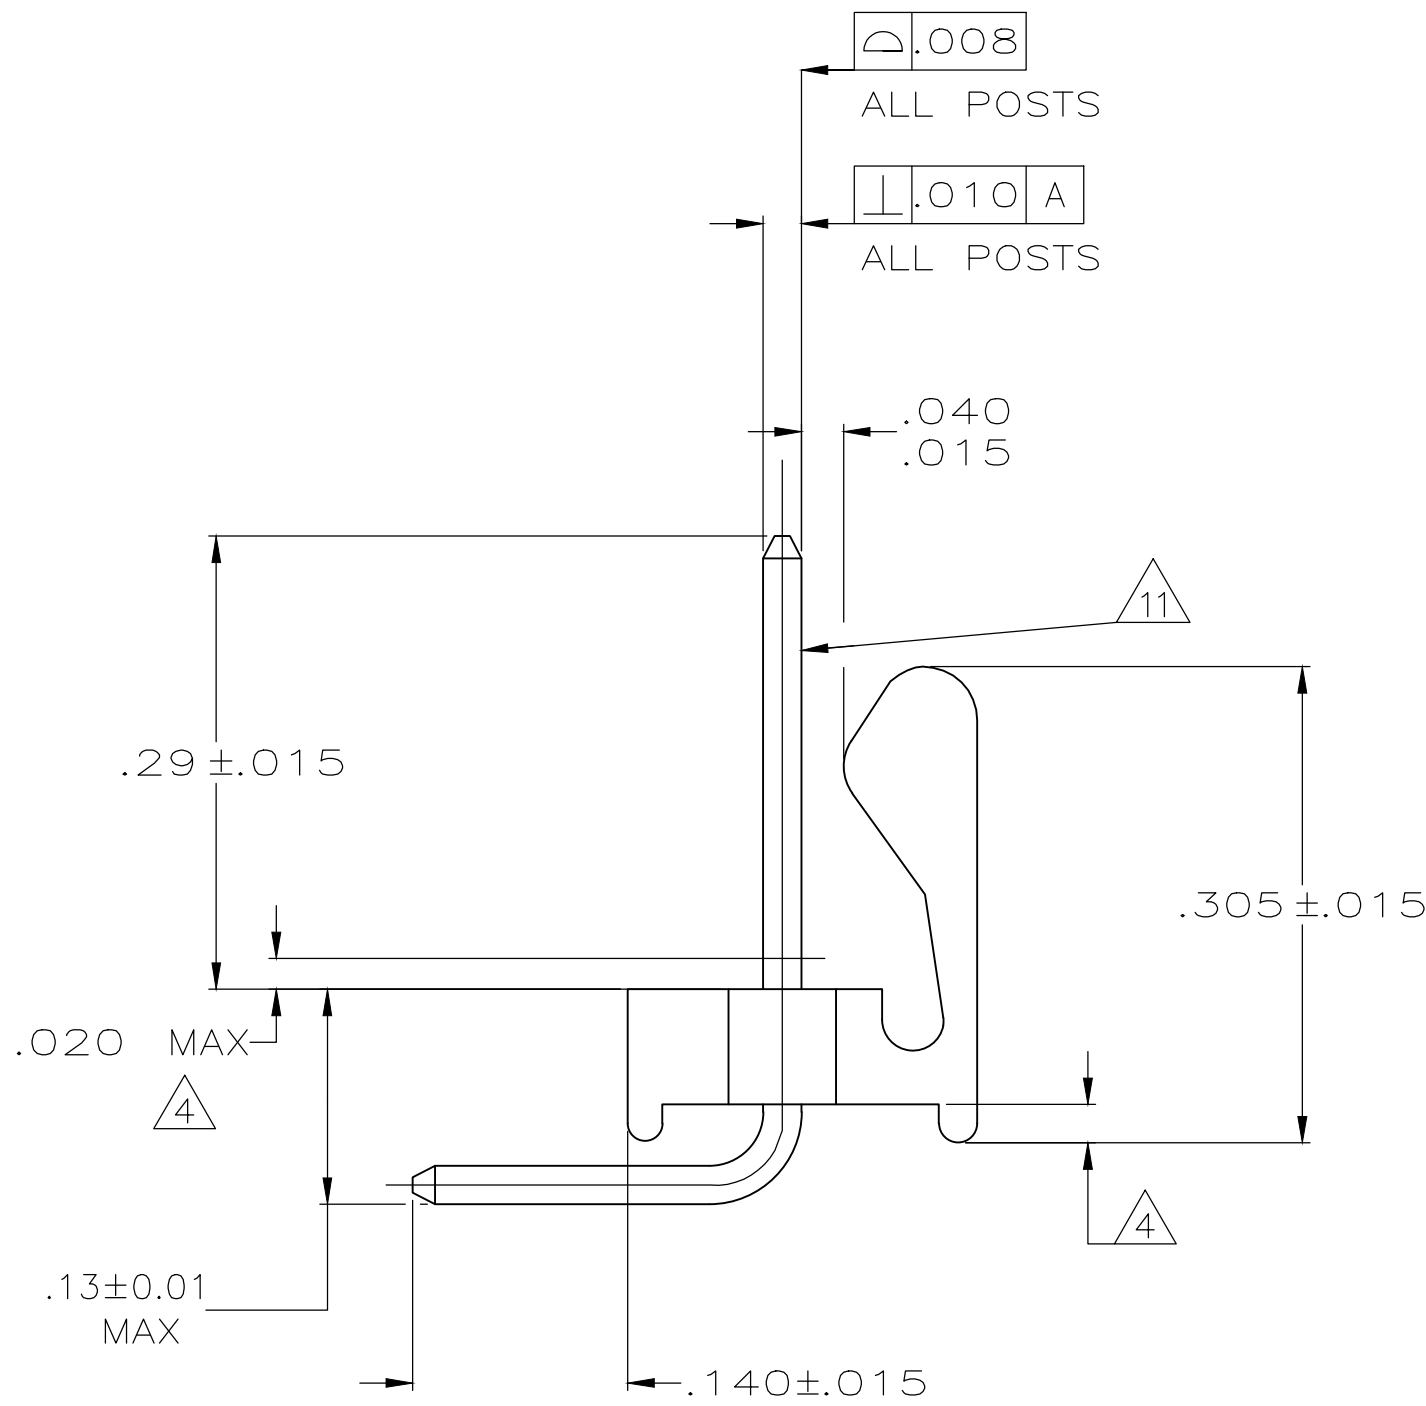
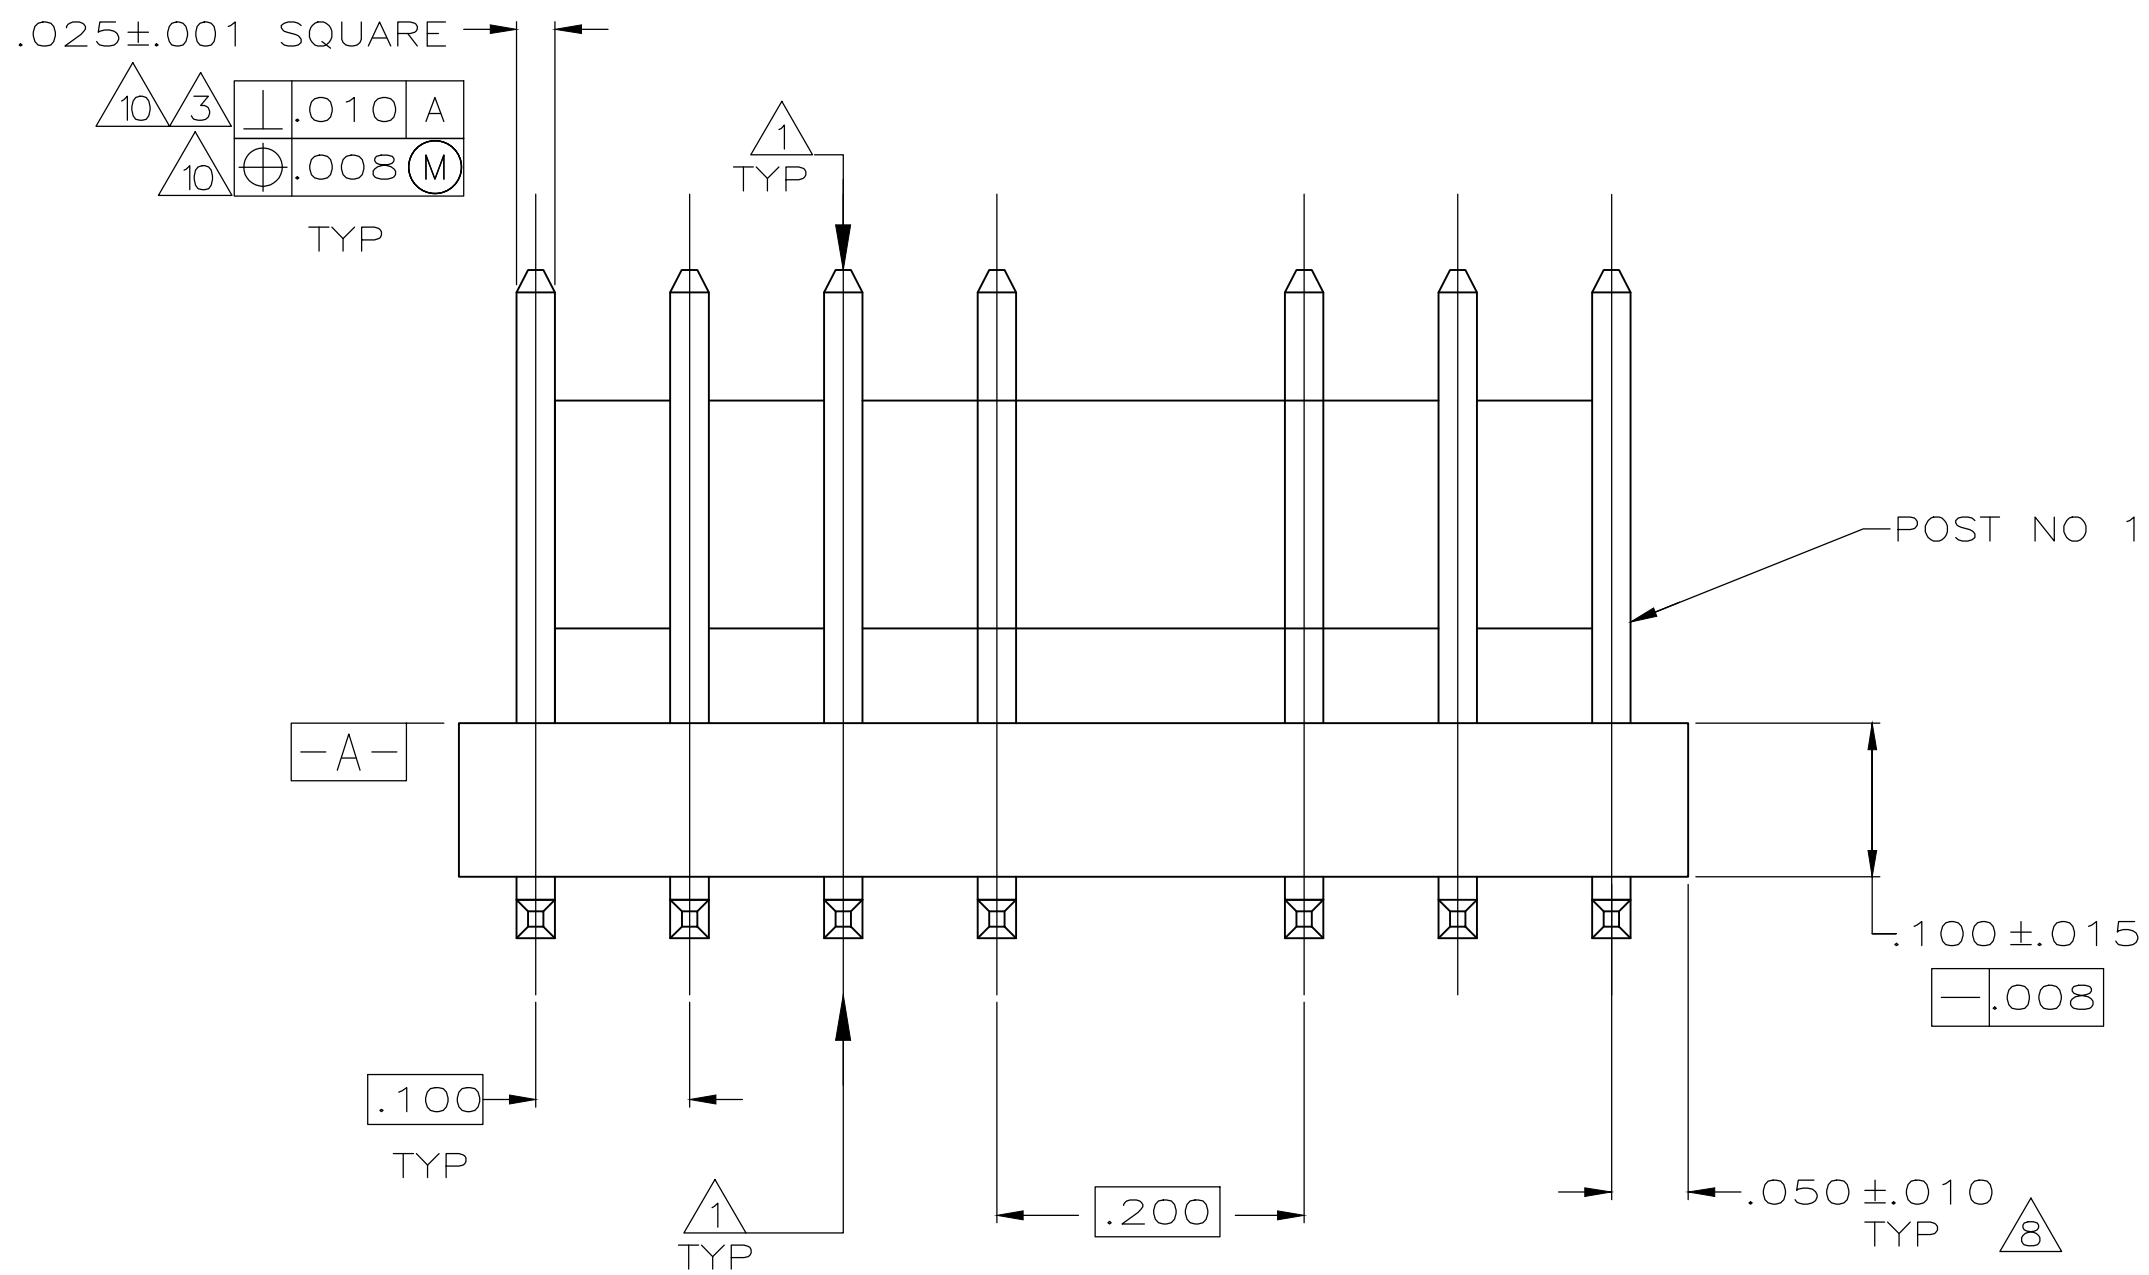


LOC	DIST	REVISIONS			
		REV	DESCRIPTION	DATE	BY
CM	54	J2	REVISED PER ECO-14-011424	23SEP14	MGM CO

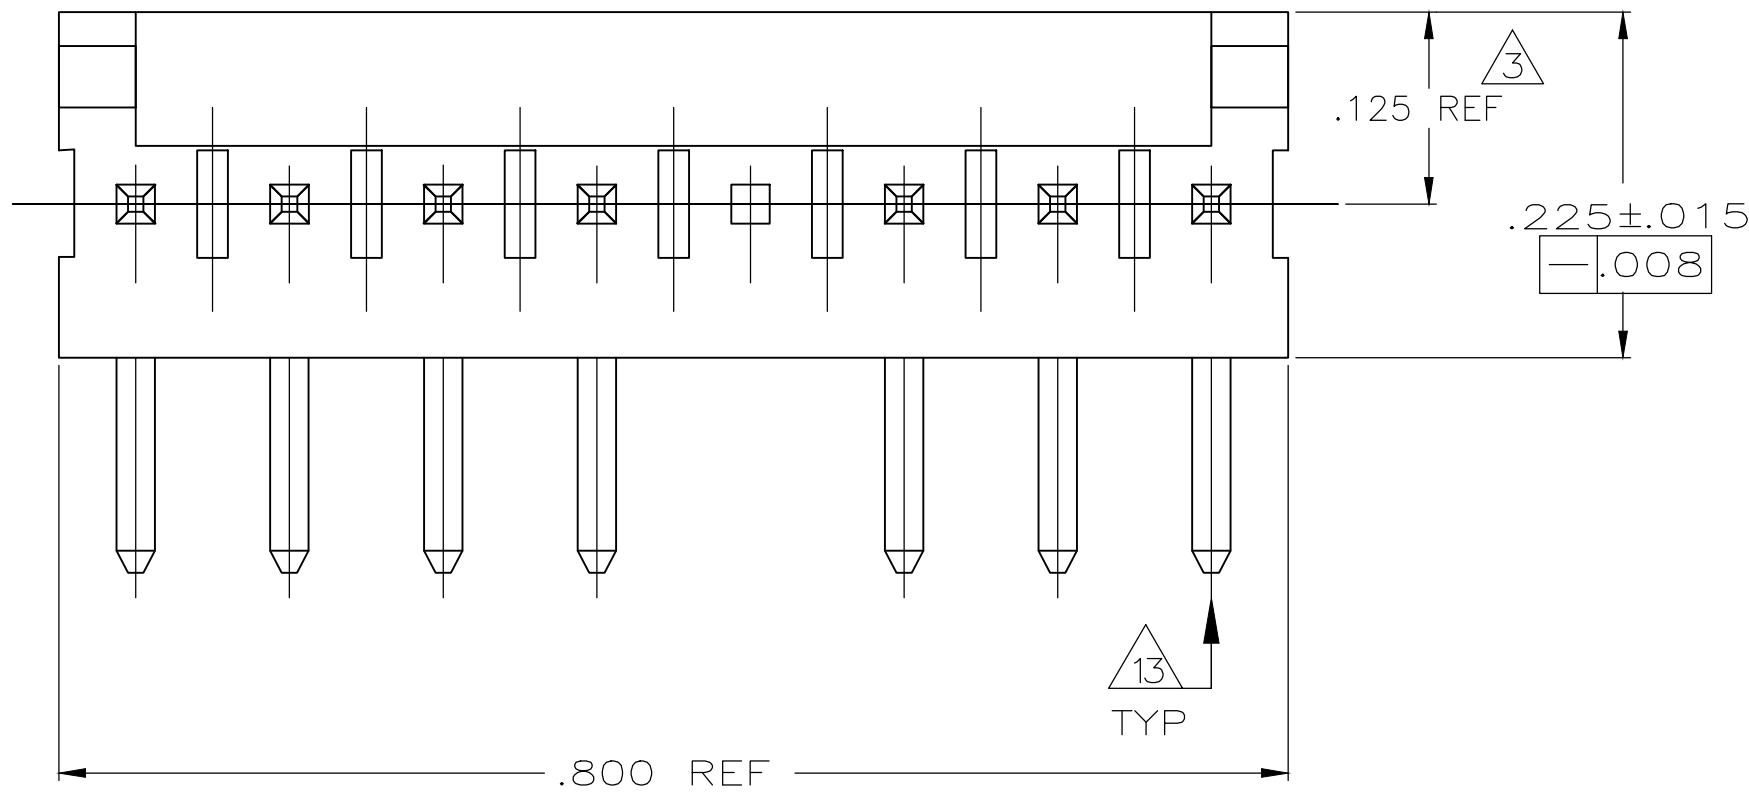

RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THICK P.C. BOARD



- POST TO WITHSTAND 13 NEWTONS (3LBS.) MIN. AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
- TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- MEASURED AT SURFACE (-A-)
- PLASTIC FLASH PERMITTED IN THIS AREA.
- PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
- ONE HOLE MAY BE UNDERSIZED (.035/.032 DIA.) FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- MATERIAL: HEADER-THERMOPLASTIC POLYESTER 94V-O(NATURAL) POST-COPPER ALLOY (TIN PLATED)
- COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
- POST TO BE MEASURED WHEN STRIP IS HELD FLAT.
- POST MUST WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
- DIMENSION SHOULD BE .110-.160 WHEN MATING WITH A MTA 100 CONNECTOR ASSEMBLY OR .110-.120 WHEN MATING WITH A CST 100 CONNECTOR.
- PIN BURR OF .005 MAX. VERTICAL AND .003 MAX. HORIZONTAL PERMITTED AT POST TIPS ON BOTH ENDS.

.050	1.27	-	-
.040	1.02	.800	20.32
.035	0.89	.310	7.87
.032	0.81	.295	7.49
.025	0.64	.225	5.72
.020	0.51	.200	5.08
.015	0.38	.160	4.06
.010	0.25	.140	3.56
.008	0.20	.125	3.18
.005	0.13	.120	3.05
.003	0.08	.110	2.79
.001	0.03	.100	2.54
.000	0.00	.063	1.60
IN	MM	IN	MM
CONVERSION TABLE			

OBSOLETE	3 & 5	644437-4
OBSOLETE	7	644437-3
644437-1 SHOWN		3
		4
POST NUMBER OMITTED		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. SMITH 3-1-93	TE Connectivity	
DIMENSIONS: INCHES		CHK R. SWING 3-1-93	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. SPEER	MTA-100 HEADER ASSEMBLY, FRICTION LOCK, NOTCHED, .025 SQUARE RIGHT ANGLE POST, TIN PLATED, 8 POSITION, OMITTED POST	
0 PLC ± -		APPLICATION SPEC	SIZE	
1 PLC ± -		—	CAGE CODE	
2 PLC ± -		—	DRAWING NO	
3 PLC ± .005		—	644437	
4 PLC ± -		—	RESTRICTED TO	
ANGLES ± ± 0°30'		—	—	
FINISH		—	—	
MATERIAL		—	—	
7		7	—	
CUSTOMER DRAWING		SCALE 8:1	SHEET 1 OF 1	
			REV J2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[644437-1](#)