

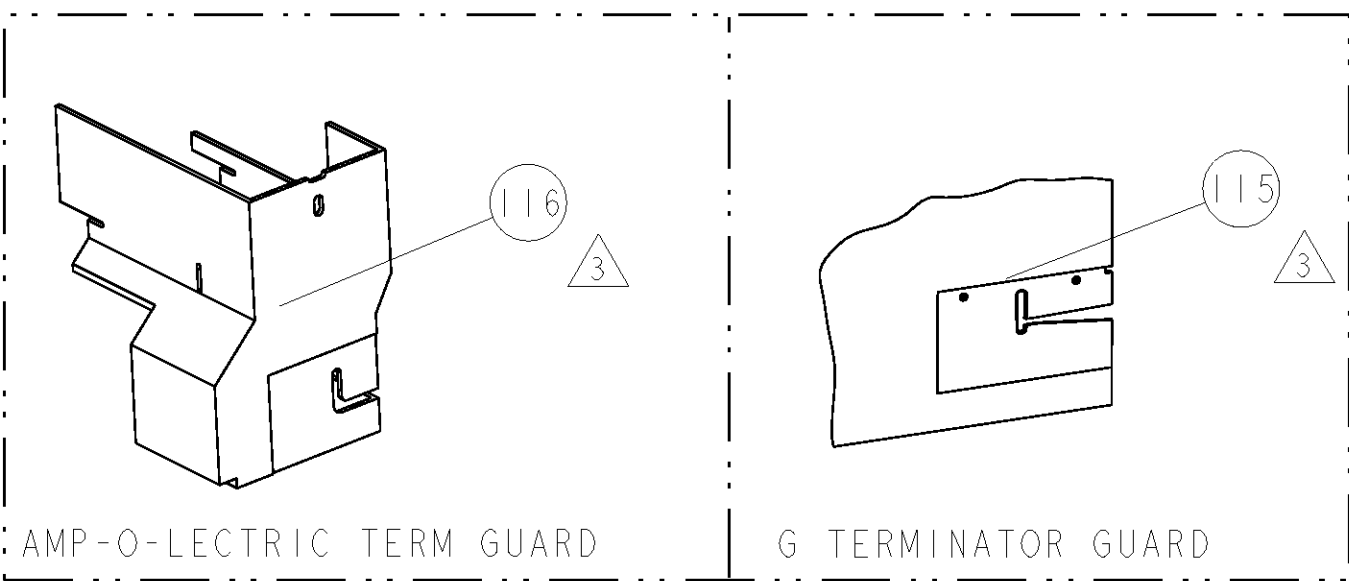
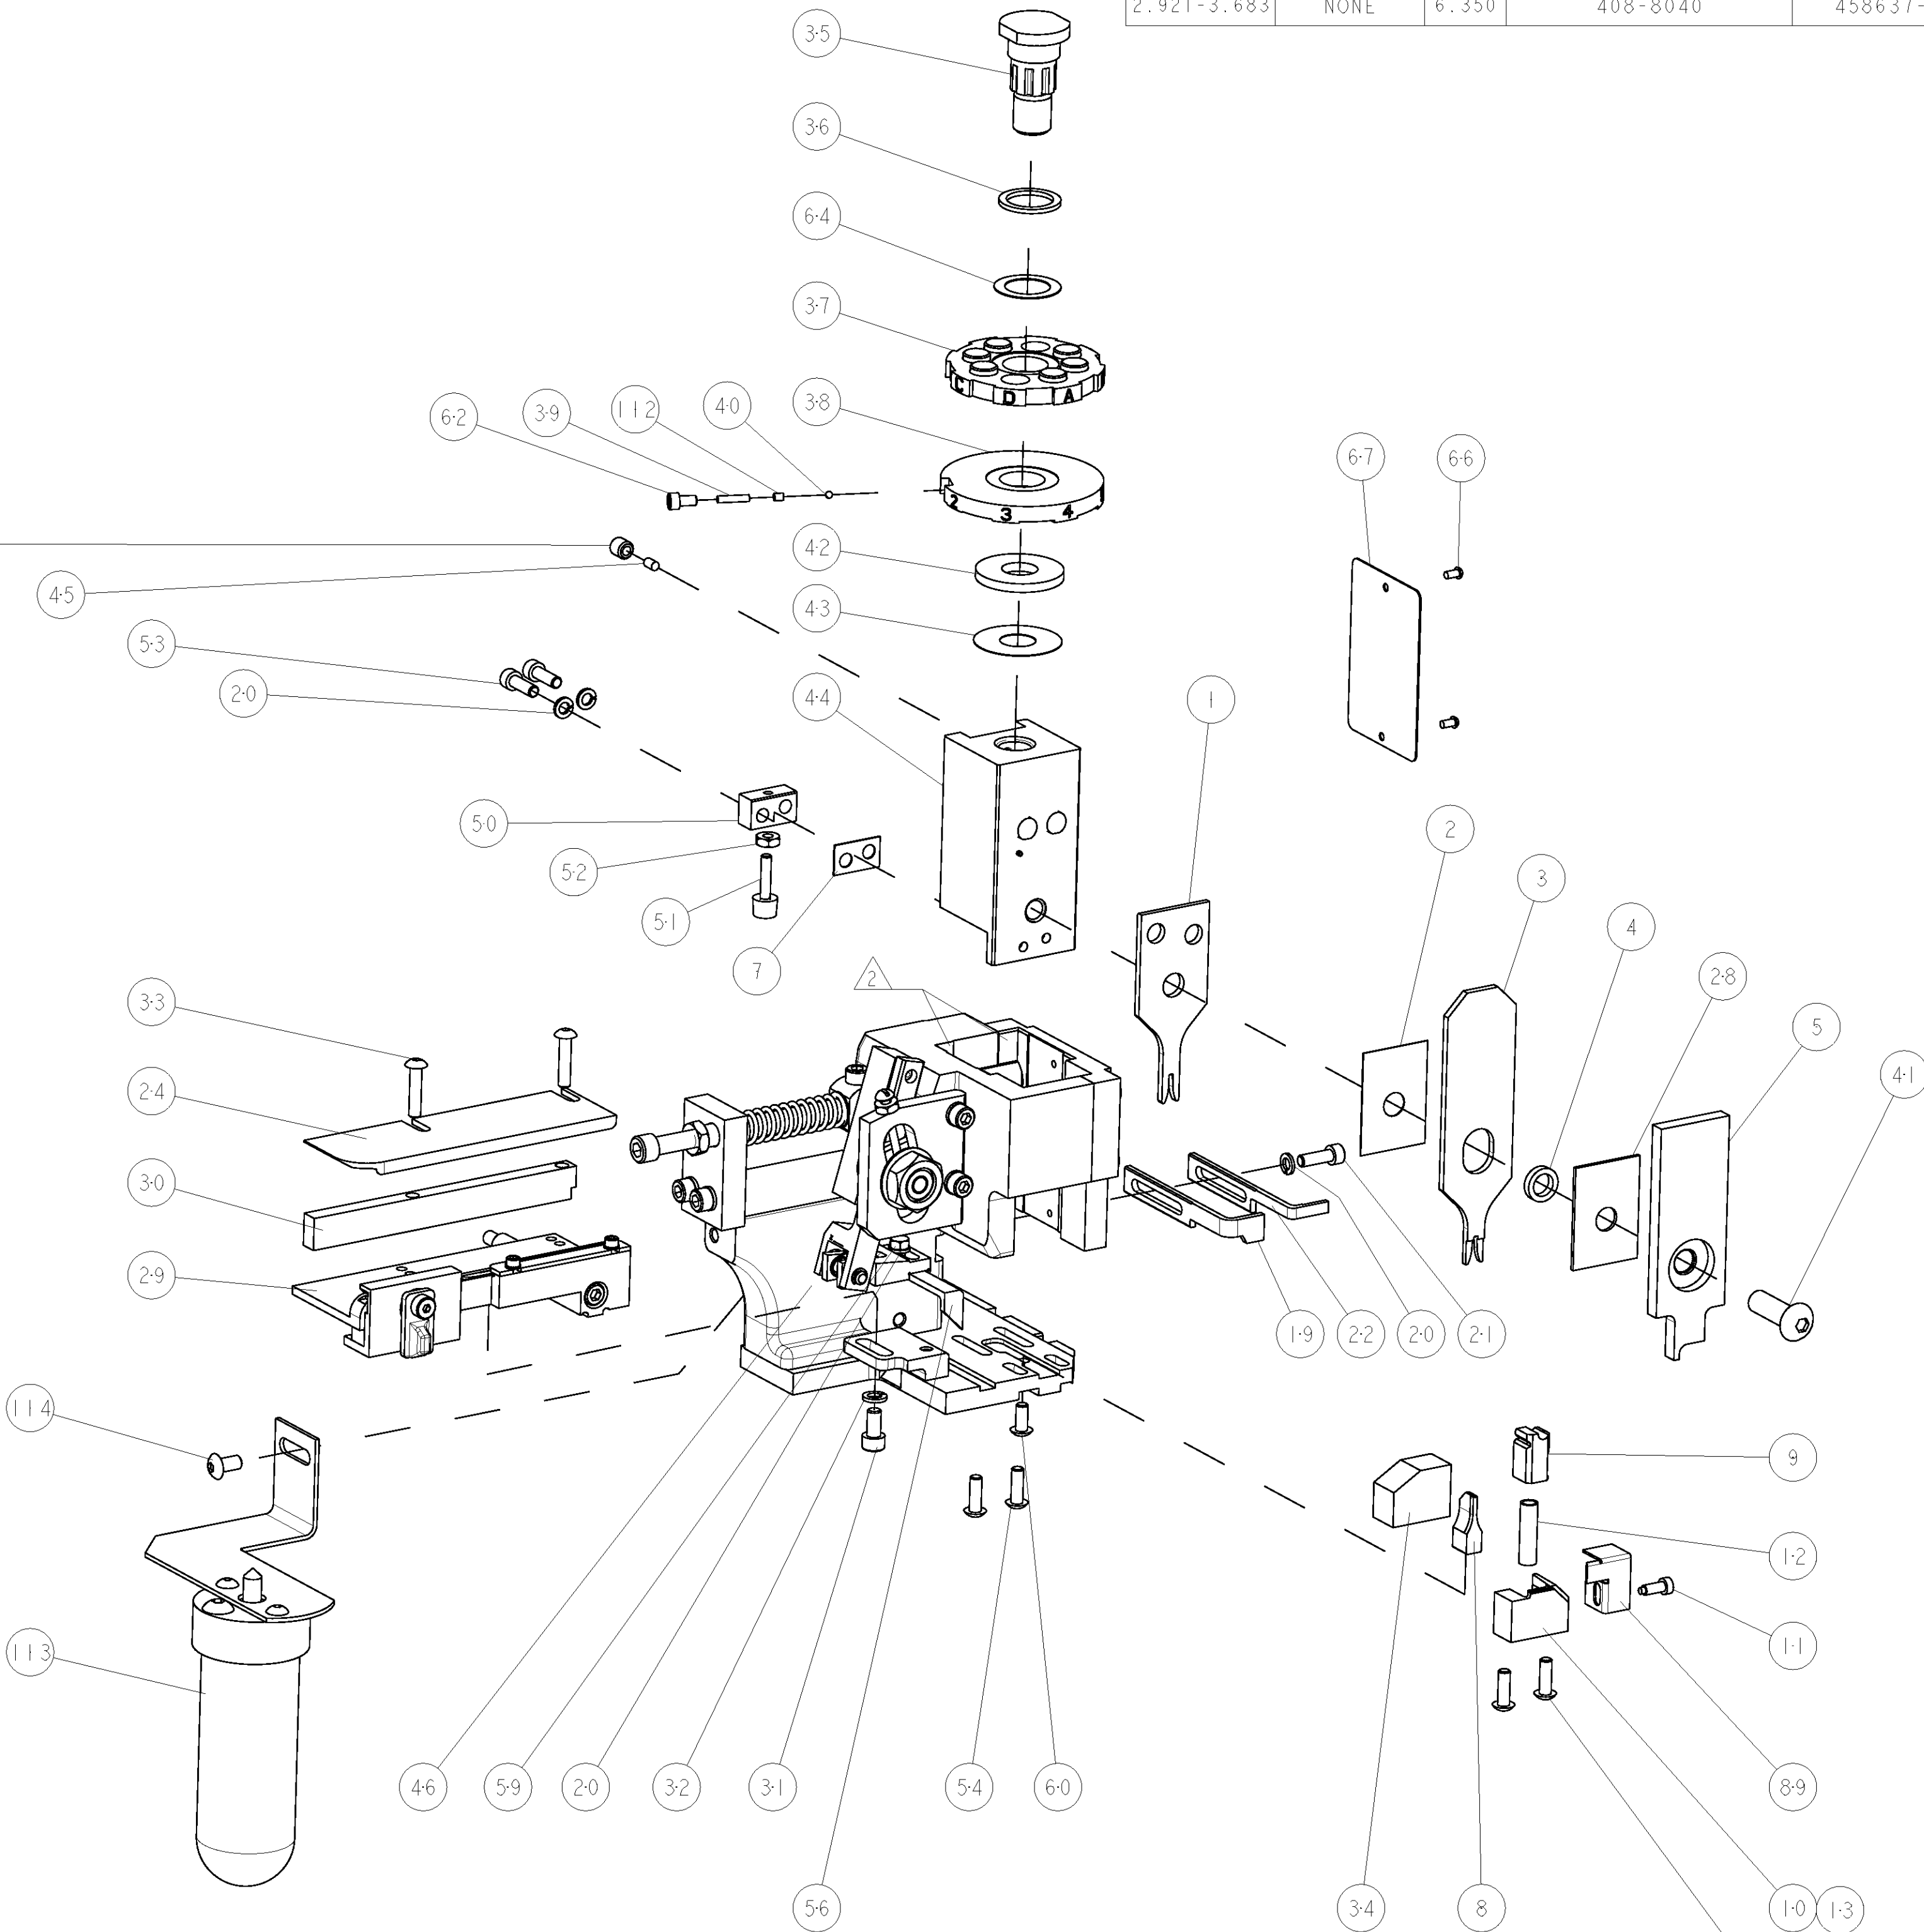
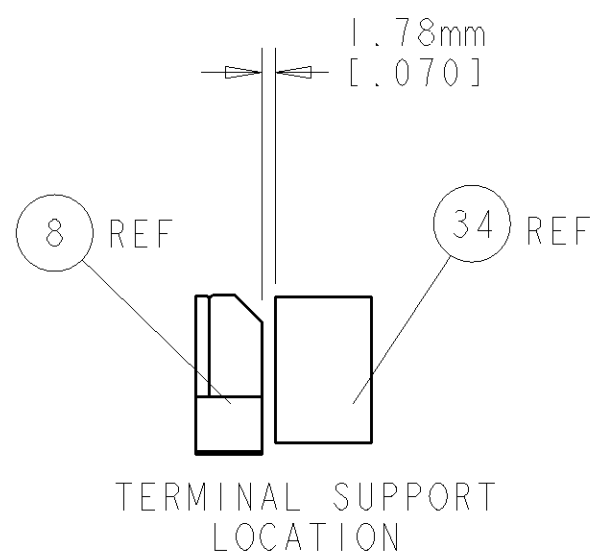


8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1852645-1		B	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1852645-2		B	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1852645-3		B	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1852645-6		B	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1852645-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

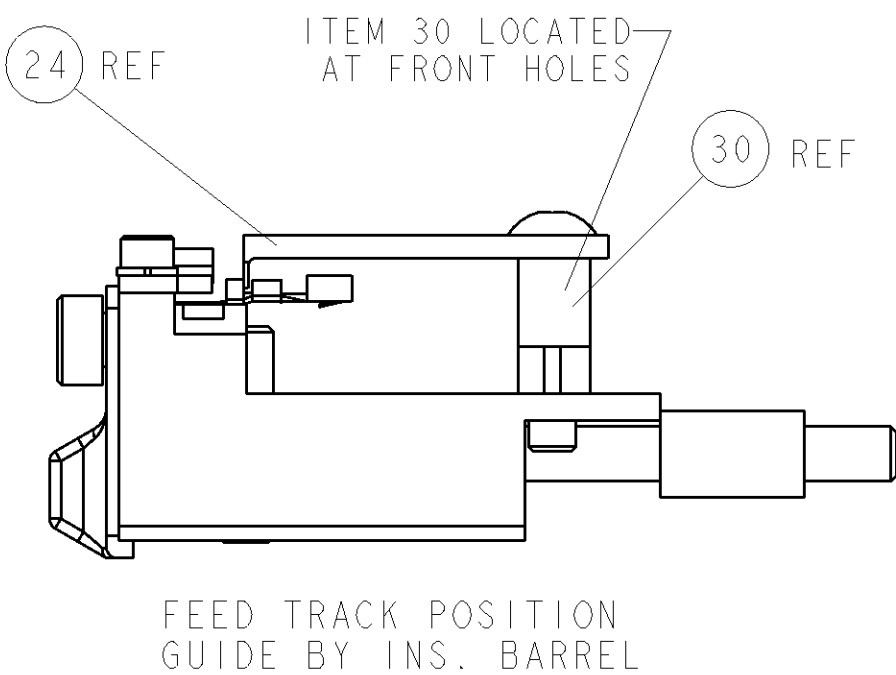

TERMINAL NAME: .100 IPDI CONTACT (C179)			
TE P/N	SAMTEC P/N	SAMTEC TERMINAL - SAMTEC CRIMP SPECS	
1572556-1	CC79R-2024-01		
-	-	PAD LTR	CRIMP HEIGHT
-	-	A	0.91mm±.05/- .05[.036±.002/- .002]
-	-	B	0.86mm±.05/- .05[.034±.002/- .002]
-	-	C	0.79mm±.05/- .05[.031±.002/- .002]
-	-	D	-
-	-	CRIMP	SIZE
-	-	WIRE	1.40mm [.055]
-	-	INSUL	1.78mm [.070]
-	-	FEED	6.350
-	-	APPLICATOR INSTRUCTIONS	408-8040
-	-	SET UP GAGE	458637-1
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	6.350
2.921-3.683	NONE		

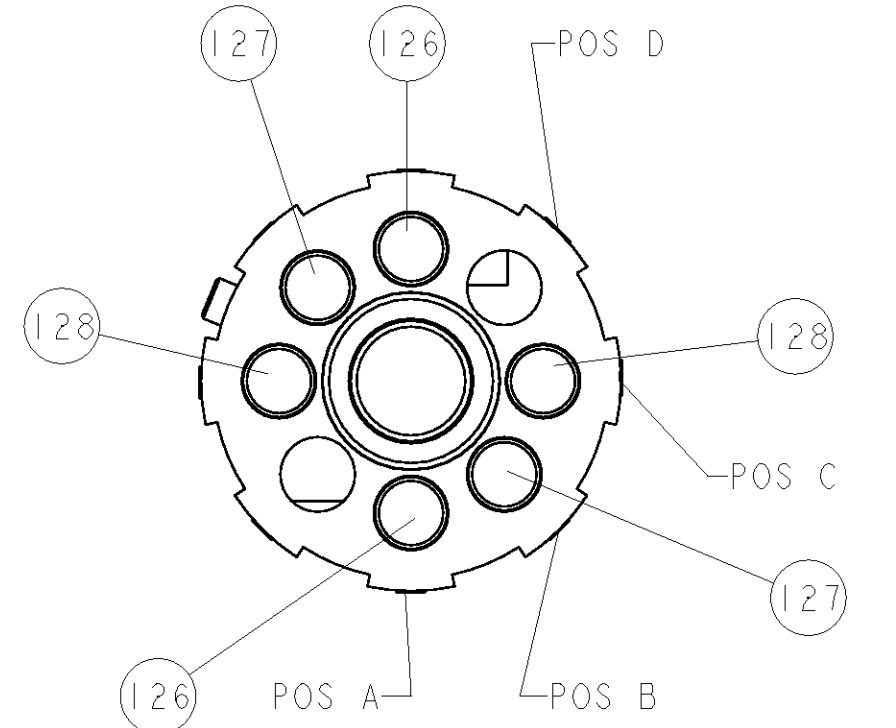

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852645-1](#)