


## MCR72-3, MCR72-6, MCR72-8

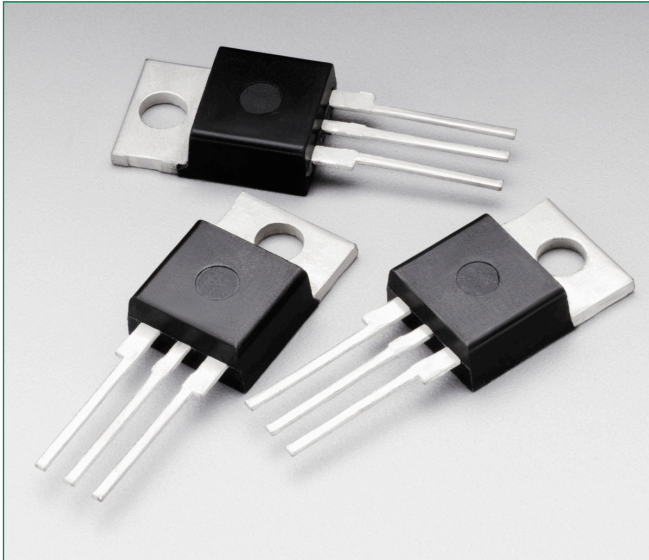



### Description

Designed for industrial and consumer applications such as temperature, light and speed control; process and remote controls; warning systems; capacitive discharge circuits and MPU interface.

### Features

- Center Gate Geometry for Uniform Current Density
- All Diffused and Glass-Passivated Junctions for Parameter Uniformity and Stability
- Small, Rugged Thermowatt Construction for Low Thermal Resistance, High Heat Dissipation and Durability
- Low Trigger Currents, 200 A Maximum for Direct Driving from Integrated Circuits
- These are Pb-Free Devices

### Pin Out

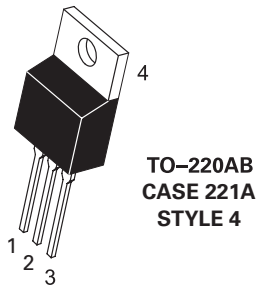

### Functional Diagram



### Additional Information



[Datasheet](#)



[Resources](#)



[Samples](#)

### Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Peak Repetitive Off-State Voltage (Note 1) (– 40 to 110°C, Sine Wave, 50 to 60 Hz, Gate Open)	$V_{\text{DRM}}$ $V_{\text{RRM}}$	100 400 600	V
On-State RMS Current (180° Conduction Angles; $T_C = 83^\circ\text{C}$ )	$I_{\text{TM (RMS)}}$	8.0	A
Peak Non-Repetitive Surge Current (1/2 Cycle, Sine Wave 60 Hz, $T_J = 110^\circ\text{C}$ )	$I_{\text{TSM}}$	100	A
Average On-State Current (180° Conduction Angles; $T_C = 83^\circ\text{C}$ )	$I_{\text{T(AV)}}$	8.0	A
Circuit Fusing Consideration ( $t = 8.3$ ms)	$I^2t$	40	A <sup>2</sup> s
Forward Peak Gate Voltage (Pulse Width $\leq 10$ $\mu\text{sec}$ , $T_C = 83^\circ\text{C}$ )	$V_{\text{GM}}$	$\pm 5.0$	V
Forward Peak Gate Current (Pulse Width $\leq 10$ $\mu\text{sec}$ , $T_C = 83^\circ\text{C}$ )	$I_{\text{GM}}$	2.0	A
Forward Peak Gate Power (Pulse Width $\leq 10$ $\mu\text{sec}$ , $T_C = 83^\circ\text{C}$ )	$I_{\text{GM}}$	20	W
Average Gate Power ( $t = 8.3$ ms, $T_C = 83^\circ\text{C}$ )	$P_{\text{G(AV)}}$	0.75	W
Operating Junction Temperature Range	$T_J$	-40 to +110	°C
Storage Temperature Range	$T_{\text{stg}}$	-40 to +150	°C
Mounting Torque	–	8.0	in. lb.

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- $V_{\text{DRM}}$  and  $V_{\text{RRM}}$  for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

### Thermal Characteristics

Rating	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta\text{JC}}$	2.2	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta\text{JA}}$	60	
Maximum Lead Temperature for Soldering Purposes 1/8" from Case for 10 Seconds	$T_L$	260	°C

### Electrical Characteristics - OFF ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
Peak Repetitive Forward or Reverse Blocking Current ( $V_{AK} = \text{Rated } V_{DRM}$ or $V_{RRM}$ , $R_{GK} = 1 \text{ k}\Omega$ )	$T_J = 25^\circ\text{C}$	$I_{DRM}$	-	-	10	$\mu\text{A}$
	$T_J = 110^\circ\text{C}$	$I_{RRM}$	-	-	500	
High Logic Level Supply Current from $V_{CC}$		$I_{CCH}$	4	4	$\mu\text{A}$	

### Electrical Characteristics - ON ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
Peak Forward On-State Voltage ( $I_{TM} = 16 \text{ A Peak}$ , Pulse Width $\leq 1 \text{ ms}$ , Duty Cycle $\leq 2\%$ )		$V_{TM}$	-	-	2.0	V
Gate Trigger Current (Continuous dc) (Note 3) ( $V_D = 12 \text{ V}$ ; $R_L = 100 \Omega$ )		$I_{GT}$	-	30	200	$\mu\text{A}$
Gate Trigger Voltage (Continuous dc) (Note 3) ( $V_D = 12 \text{ V}$ ; $R_L = 100 \Omega$ )		$V_{GT}$	-	0.5	1.5	V
Gate Trigger Non-Trigger Voltage ( $V_D = 12 \text{ Vdc}$ , $R_L = 100 \Omega$ , $T_J = 110^\circ\text{C}$ )		$V_{GD}$	0.1	-	-	V
Holding Current ( $V_D = 12 \text{ V}$ , Initiating Current = 200 mA, $R_{GK} = 1 \text{ k}\Omega$ )		$I_H$	-	-	6.0	mA
Gate Controlled Turn-On Time (Note 5) ( $V_D = \text{Rated } V_{DRM}$ , $I_{TM} = 16 \text{ A}$ , $I_G = 2 \text{ mA}$ )		$t_{gt}$	-	1.0	-	$\mu\text{s}$

### Dynamic Characteristics


Characteristic	Symbol	Min	Typ	Max	Unit
Critical Rate of Rise of Off-State Voltage ( $V_D = \text{Rated } V_{DRM}$ , $R_{GK} = 1 \text{ k}\Omega$ , Exponential Waveform, Gate Open, $T_J = 110^\circ\text{C}$ )	dv/dt	-	10	-	V/ $\mu\text{s}$

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


- Ratings apply for negative gate voltage or  $R_{GK} = 1 \Omega$ . Devices shall not have a positive gate voltage concurrently with a negative voltage on the anode. Devices should not be tested with a constant current source for forward and reverse blocking capability such that the voltage applied exceeds the rated blocking voltage.
- RGK current not included in measurement.

### Voltage Current Characteristic of SCR


Symbol	Parameter
$V_{DRM}$	Peak Repetitive Forward Off State Voltage
$I_{DRM}$	Peak Forward Blocking Current
$V_{RRM}$	Peak Repetitive Reverse Off State Voltage
$I_{RRM}$	Peak Reverse Blocking Current
$V_{TM}$	Maximum On State Voltage
$I_H$	Holding Current

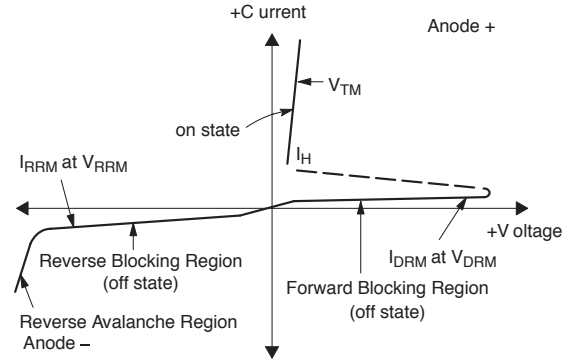


**Figure 1. Average Current Derating**

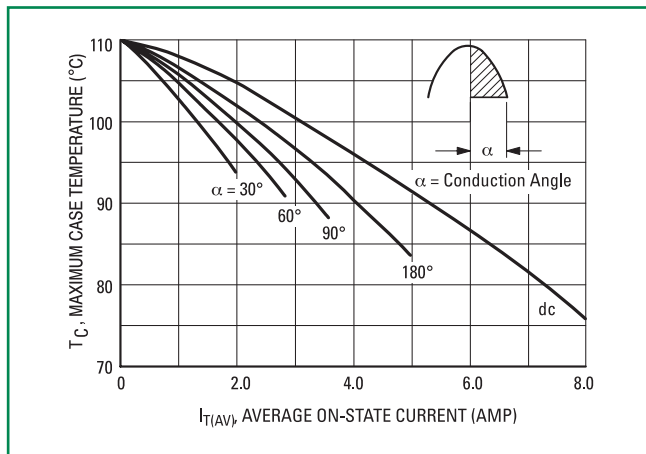


**Figure 2. On-State Power Dissipation**

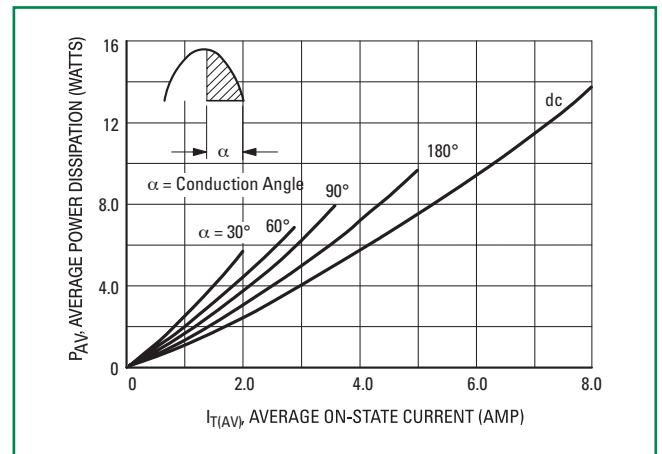

**Figure 3. Normalized Gate Current**

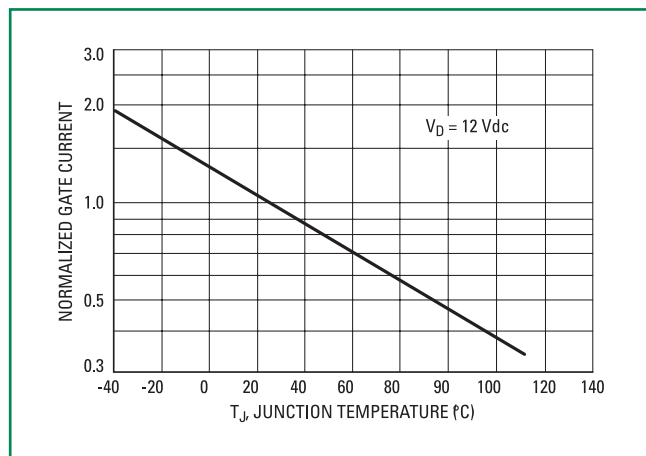


**Figure 4. Gate Voltage**

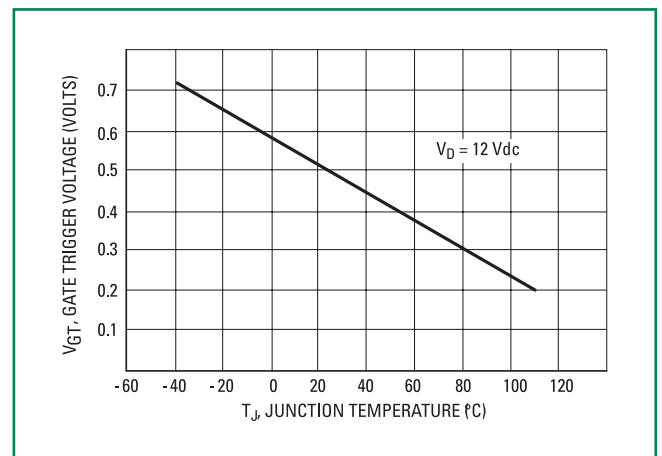

### Dimensions

**TO-220**  
CASE 221A-07  
ISSUE O


**TO-220**  
CASE 221A-09  
ISSUE AH

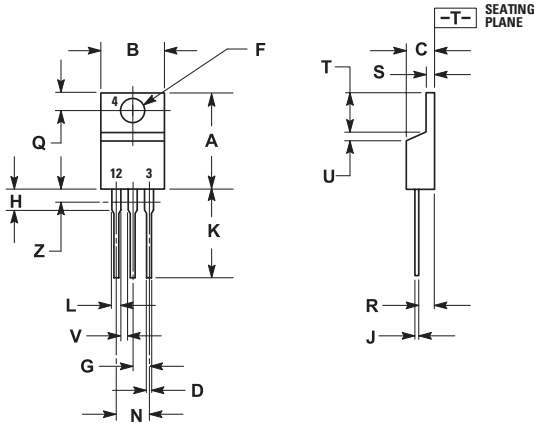


Dim	Inches		Millimeters	
	Min	Max	Min	Max
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
J	0.014	0.022	0.36	0.55
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

### Part Marking System



TO-220AB  
CASE 221A-07



TO-220AB  
CASE 221A-09



A= Assembly Location  
Y= Year  
WW = Work Week  
MCR72-x = Device Code  
x = 3, 6, 8, or 8T  
G = Pb-Free Package  
AKA= Diode Polarity

A= Assembly Location  
Y= Year  
WW = Work Week  
MCR72-6T = Device Code  
G = Pb-Free Package  
AKA= Diode Polarity

### Pin Assignment

1	Cathode
2	Anode
3	Gate
4	Anode

### Ordering Information

Device	Package	Shipping
MCR72-3G	TO-220AB (Pb-Free)	500 Units / Box
MCR72-6G		
MCR72-6TG		50 Units / Box
MCR72-8G		500 Units / Box
MCR72-8TG		50 Units / Box

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[MCR72-8G](#) [MCR72-8TG](#) [MCR72-6G](#) [MCR72-3G](#) [MCR72-6TG](#)