

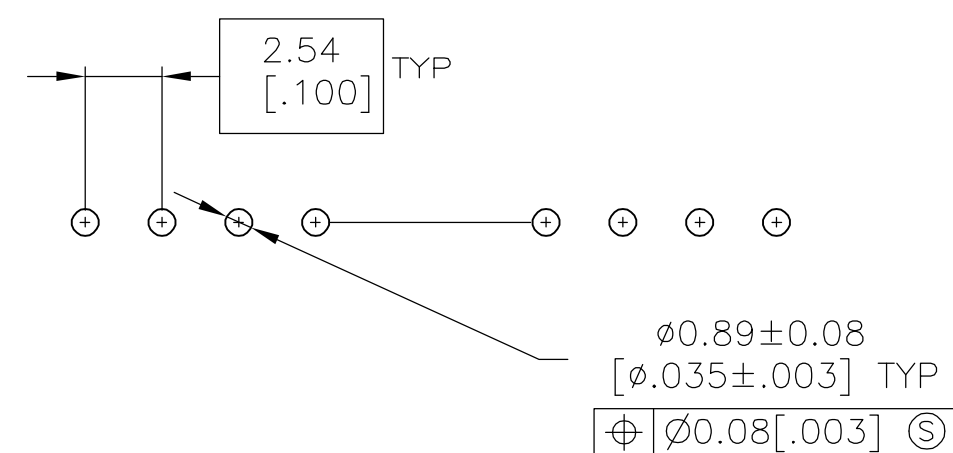
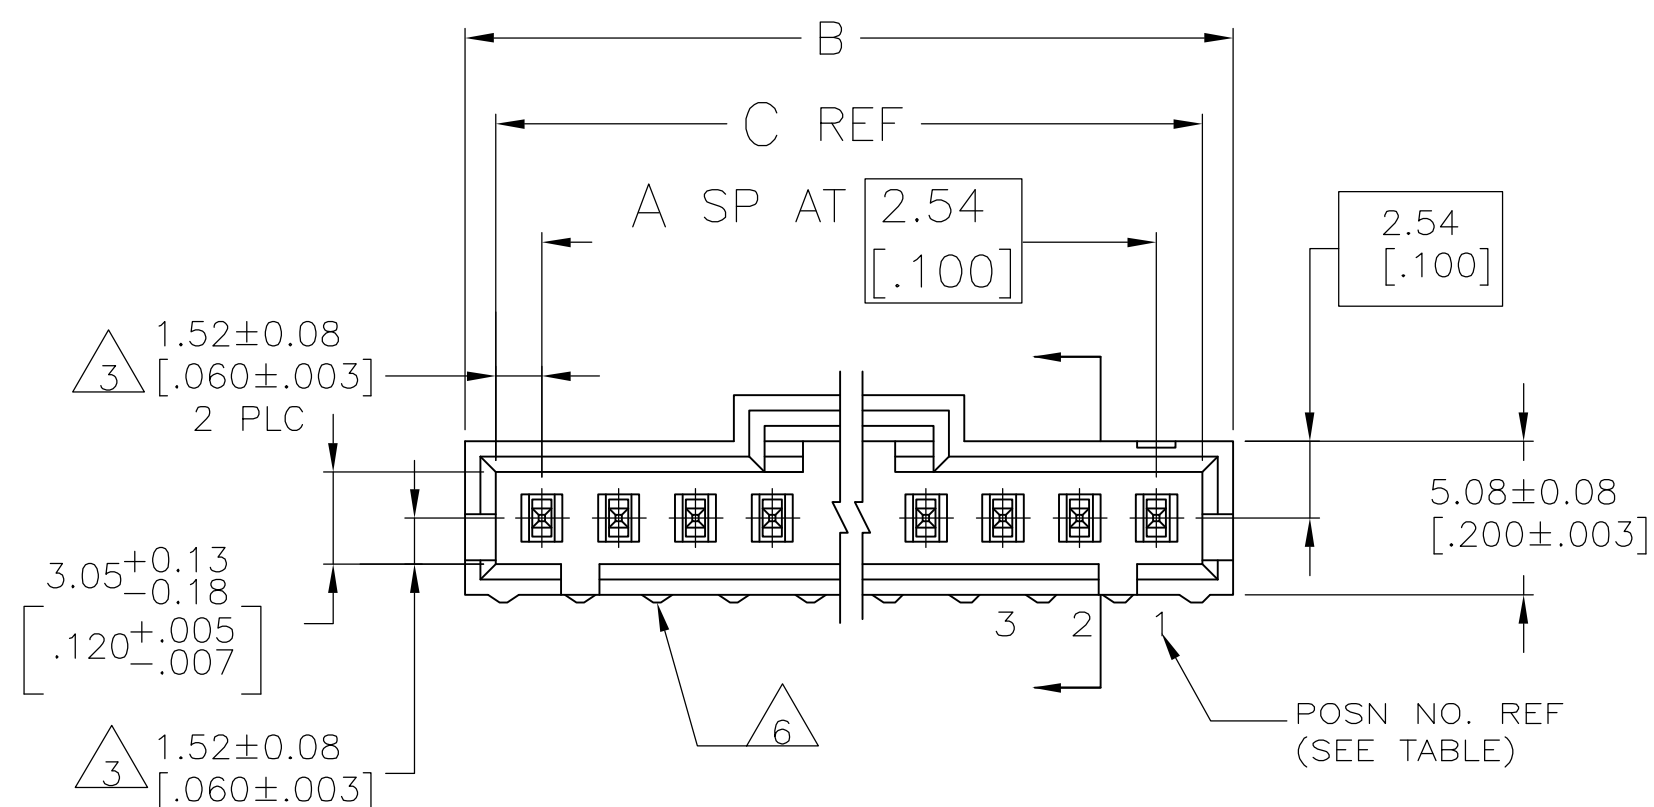



LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			F	EC 0G3C 0786 04	29JAN05	BSV	JLG

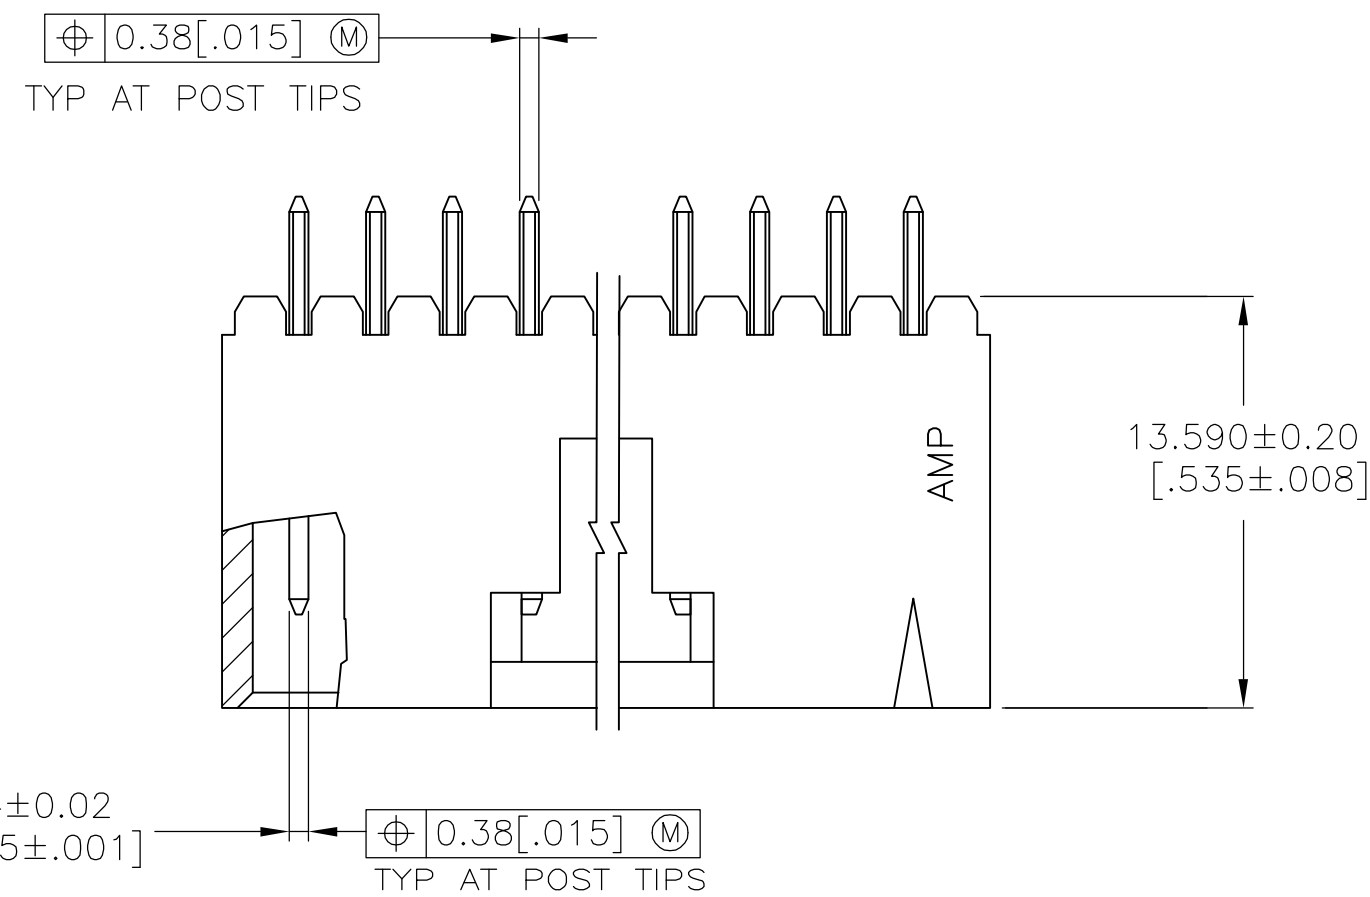

RECOMMENDED HOLE LAYOUT

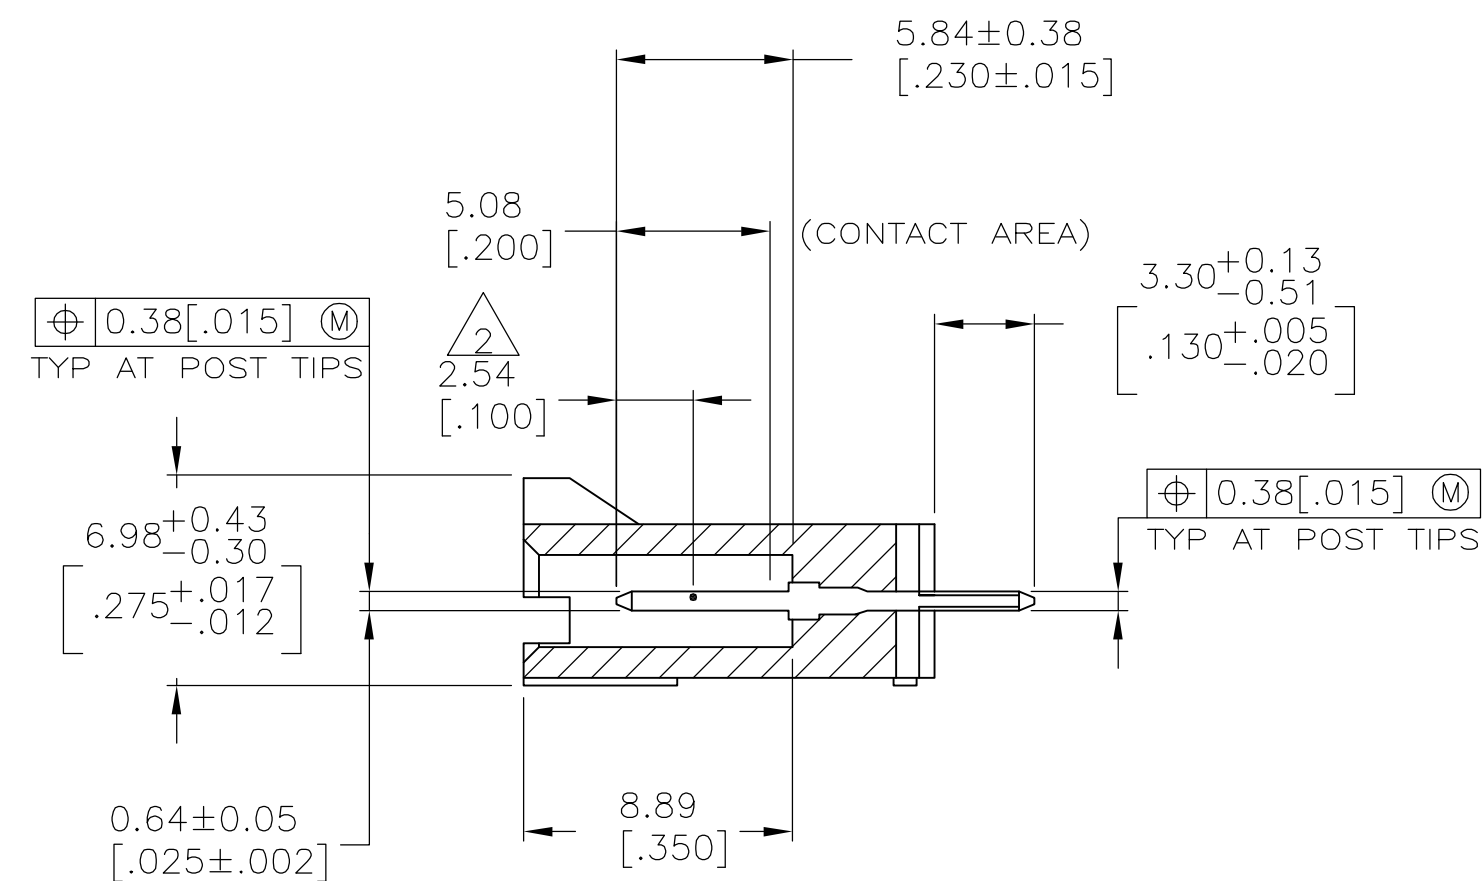

1. .00076[.000030] GOLD IN THE CONTACT AREA,
.00254[.000100] — .00508[.000200] MATTE TIN-LEAD
ON THE SOLDER TAIL, ALL OVER .00127[.000050] NICKEL.
2. POINT OF MEASUREMENT FOR PLATING THICKNESS.
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION
OF THE POST AND THE HOUSING.
4. .00076[.000030] GOLD IN THE CONTACT AREA,
.00254[.000100] — .00508[.000200] MATTE TIN
ON THE SOLDER TAIL, ALL OVER .00127[.000050] NICKEL.
5. HIGH TEMPERATURE CONFIGURATION.
6. STANDOFF NOT PRESENT ON UNDERSIDE OF ASSEMBLY

		2,3,5,6,9,10,13,14	41.15 [1.620]	43.18 [1.700]	15	16	5-104912-2
		2, 4, 6, 8, 10	28.45 [1.120]	30.48 [1.200]	10	11	5-104912-1
		2,3,5,6,9,10,13,14	41.15 [1.620]	43.18 [1.700]	15	16	104912-2
		2, 4, 6, 8, 10	28.45 [1.120]	30.48 [1.200]	10	11	104912-1
REMARKS	PLATING	POST NUMBER OMITTED	C	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.BRANDBERG 20-7-94	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
		CHK J.GESFORD 20-7-94				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.GESFORD 20-7-94	NAME			
	0 PLC ± -	PRODUCT SPEC	HDR ASSY, VERT, SINGLE ROW			
	1 PLC ± -	108-25034	2.54[.100]CL, 0.64[.025] SQ POST,			
	2 PLC ± 0.13[.005]	APPLICATION SPEC	WITH PLZLN, AMPMODU MTE			
	3 PLC ± -	114-25026	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	4 PLC ± -		A2	00779	C-104912	-
MATERIAL	ANGLES ± -	WEIGHT				
HOUSING: FLAME RETARDANT	FINISH	-				
THERMOPLASTIC	SEE TABLE	CUSTOMER DRAWING			SCALE	SHEET
COLOR - BLACK					4:1	1 OF 1
CONTACTS: BRASS						REV F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-104912-2](#)