
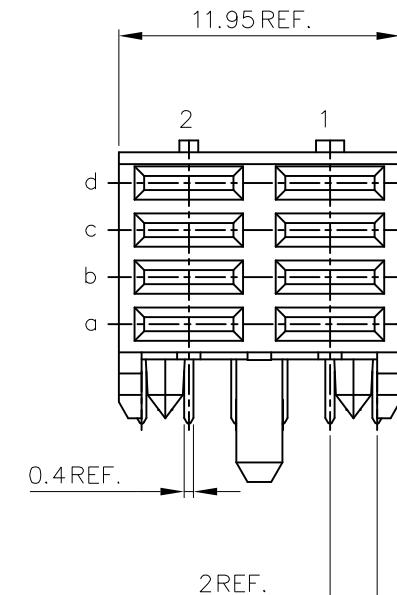
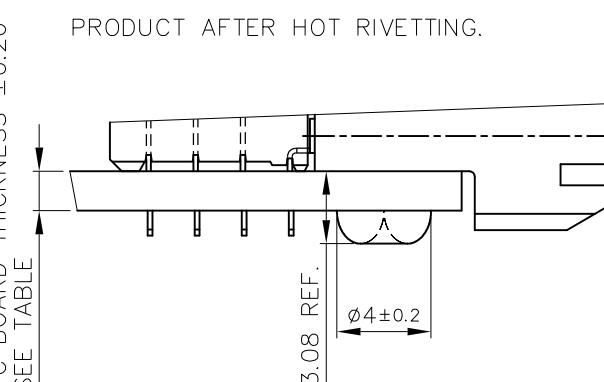

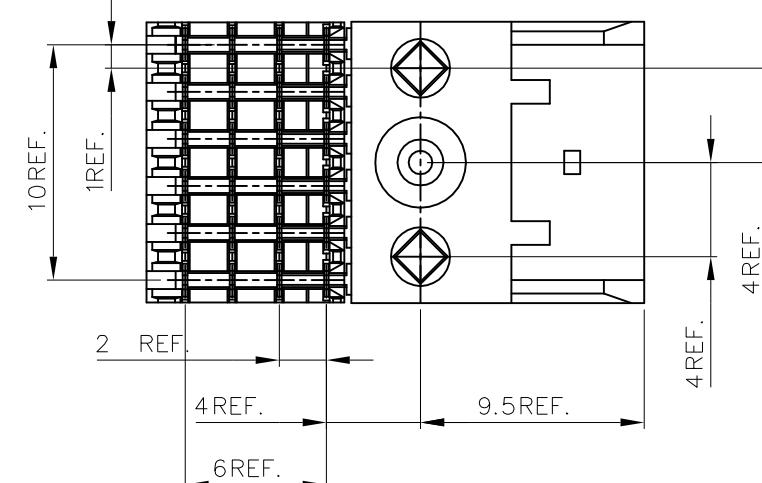


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO
-1YYLF	TELCORDIA CO
-3YYLF	CUSTOMER SPECIAL


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM "A"
70231-X02LF	1.6	2.90
70231-X12LF	2.4	3.53

SEE NOTE 7

21.14 REF

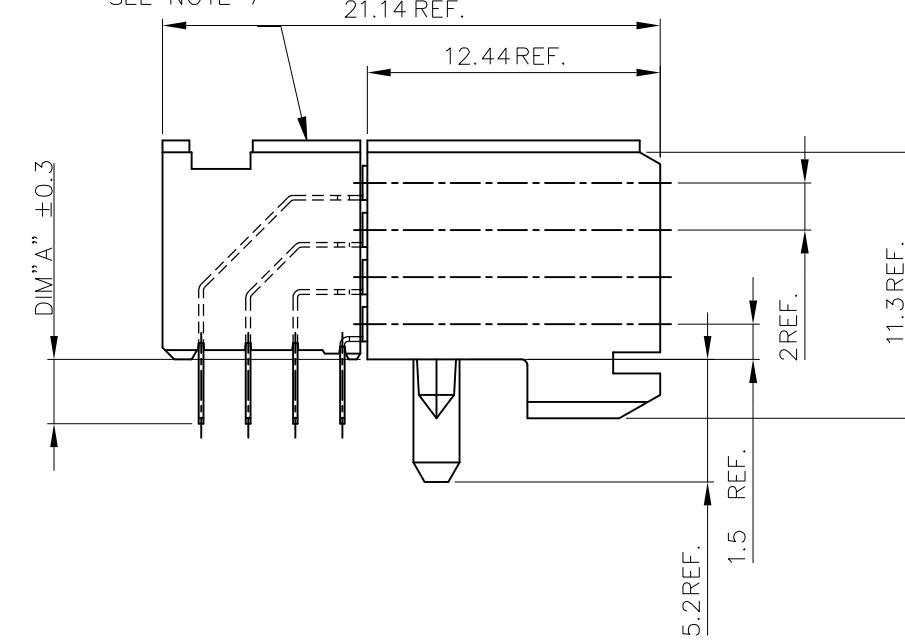

14.64 REF. SEE NOTE 6

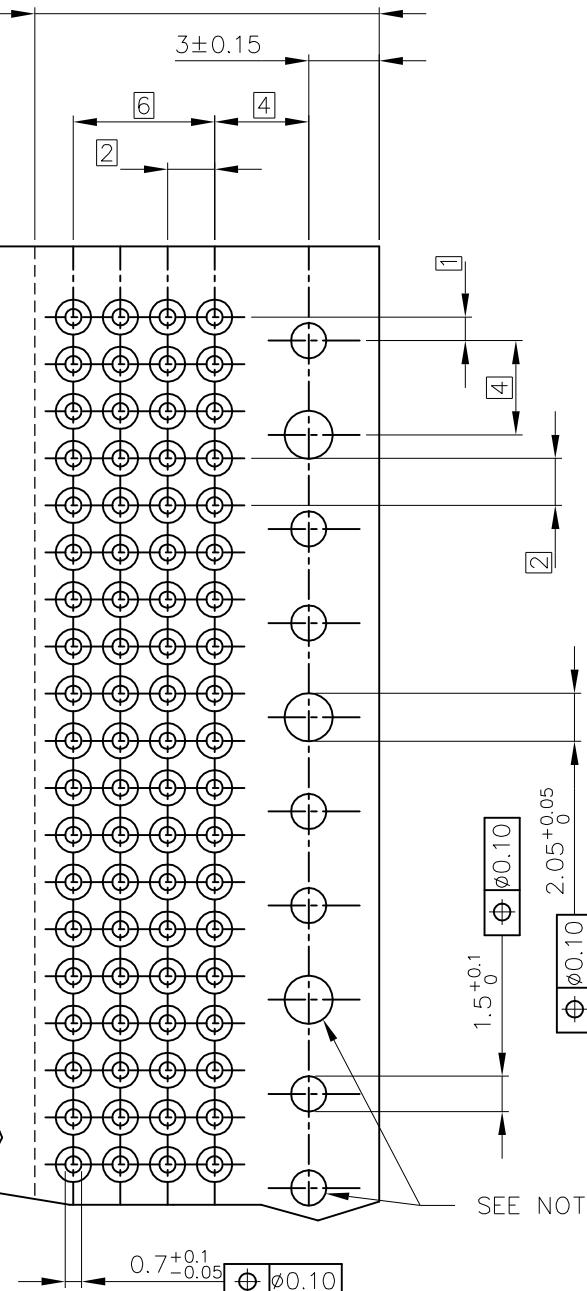

RECOMMENDED HOLE PATTERN,  
COMPONENT SIDE.

## NOTES:

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-VO
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 INDICATED HOLES ARE UNPLATED.
- 4 PRODUCT MARKING: PART NUMBER & BATCH ID.
- 5 SET BACK FOR PRESS BLOCK.
- 6 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
- 7 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 8 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION
- 9 THE PRODUCT SPECIFICATION GS-12-453.
- 10 FOR THE PRODUCT WITH 30 $\mu$ " GOLD PLATING IN TERMINAL, THEY CAN BE REPLACED BY 30 GXT PLATING.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol](#):

[70231-102LF](#) [70231-101LF](#) [70231-111LF](#)