





Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

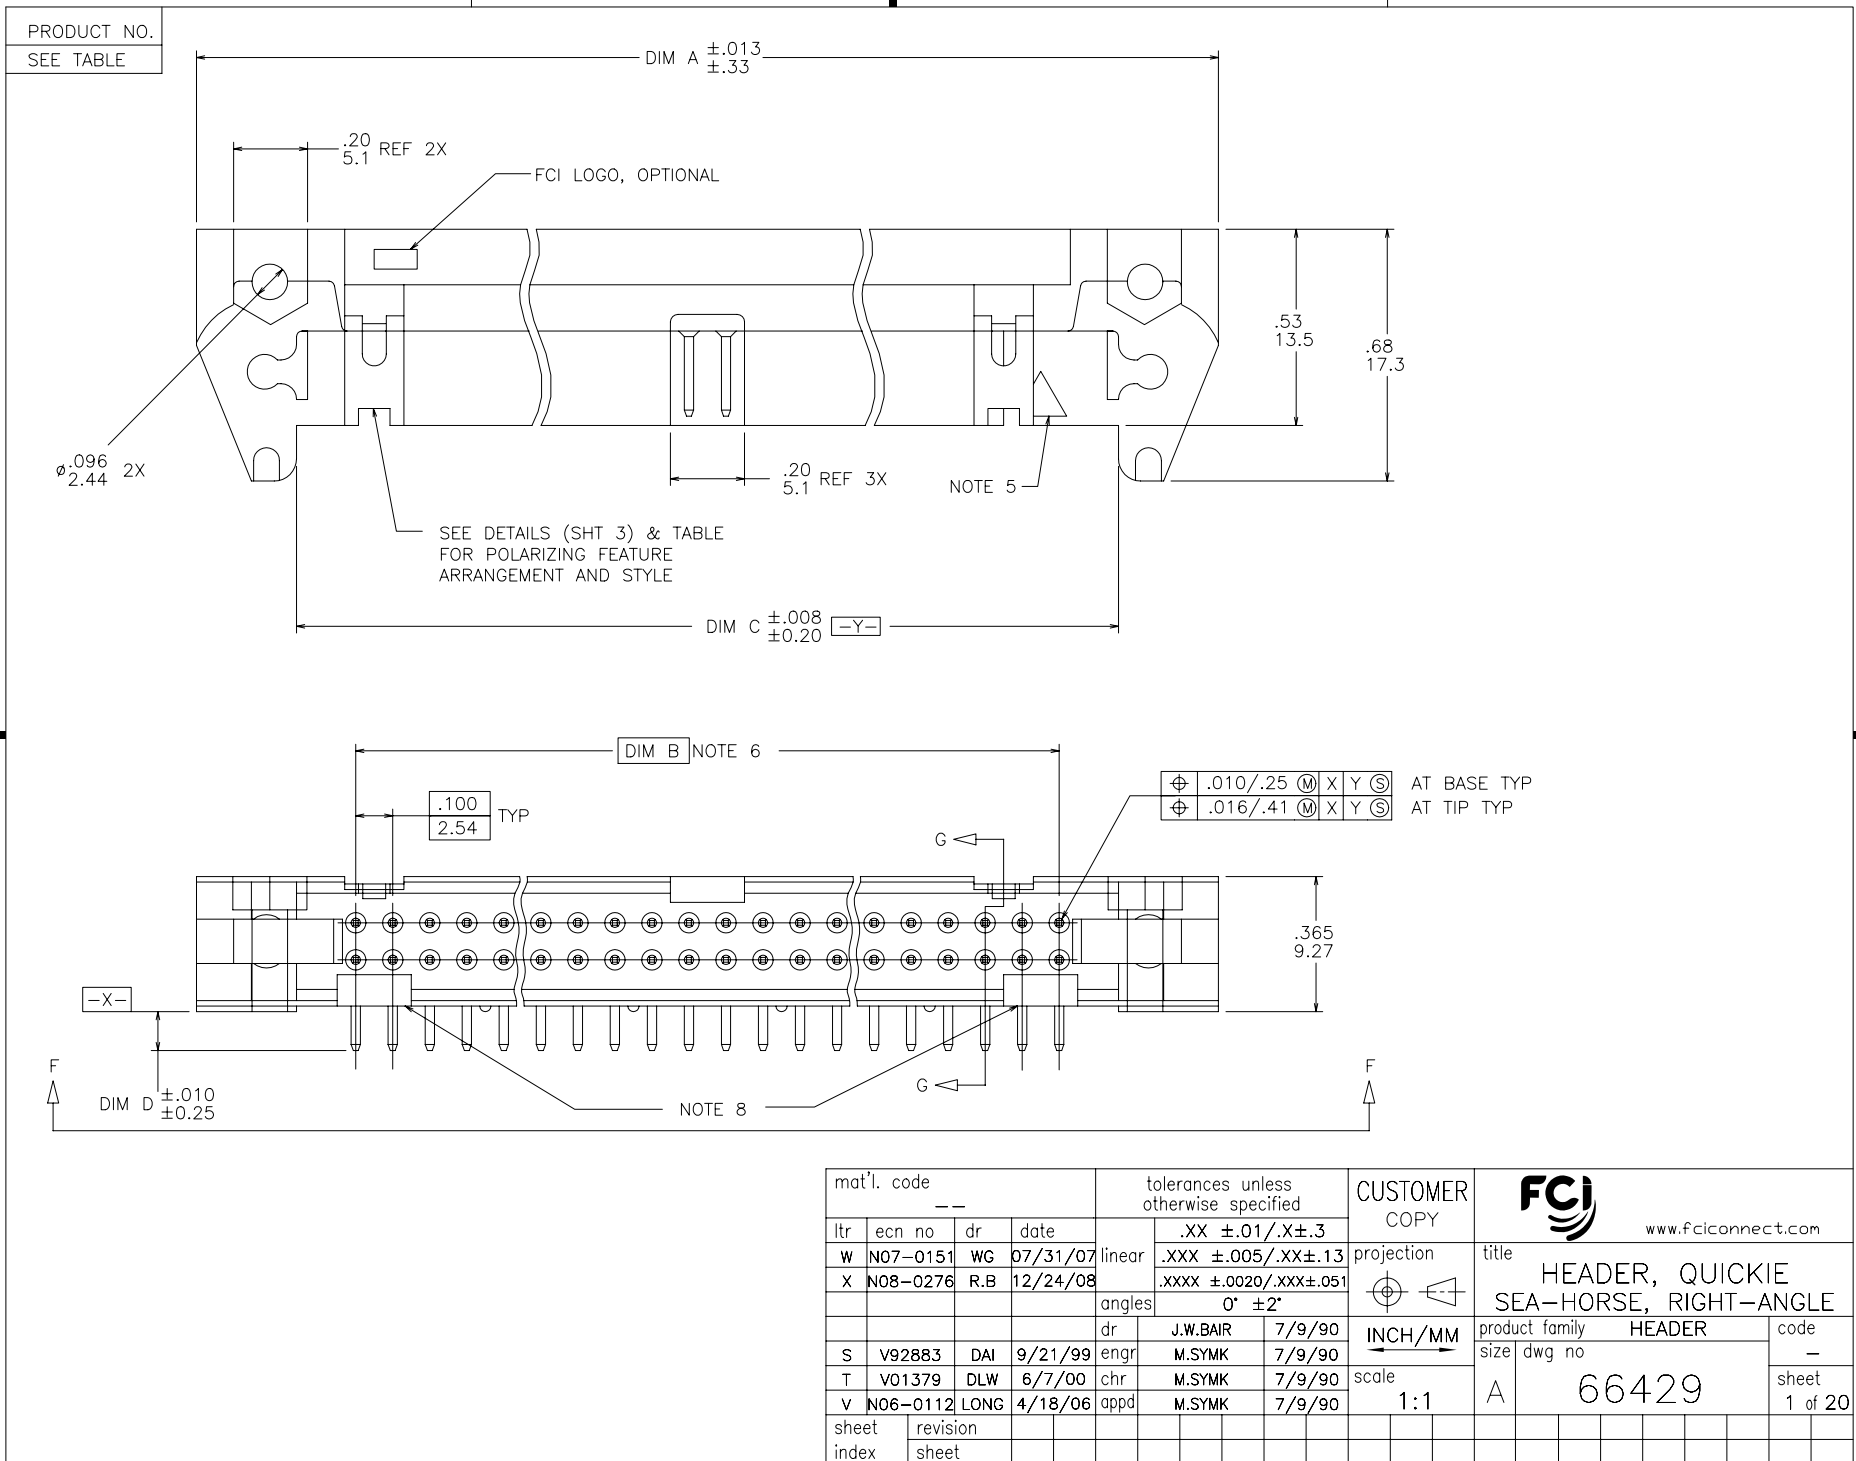

PRODUCT NO.
SEE TABLE

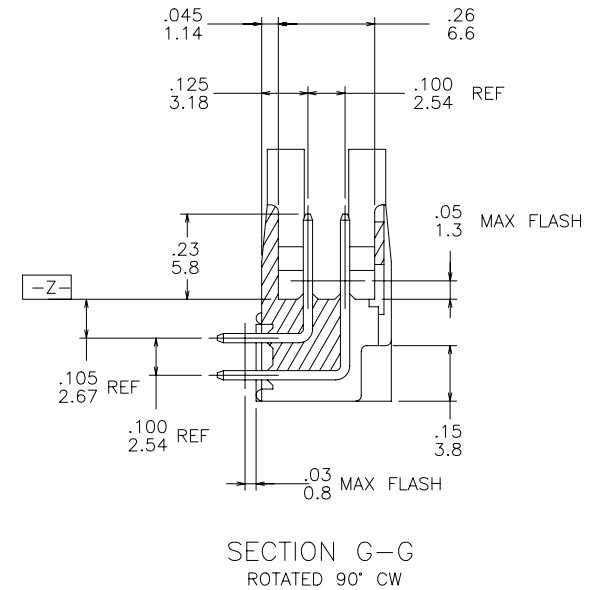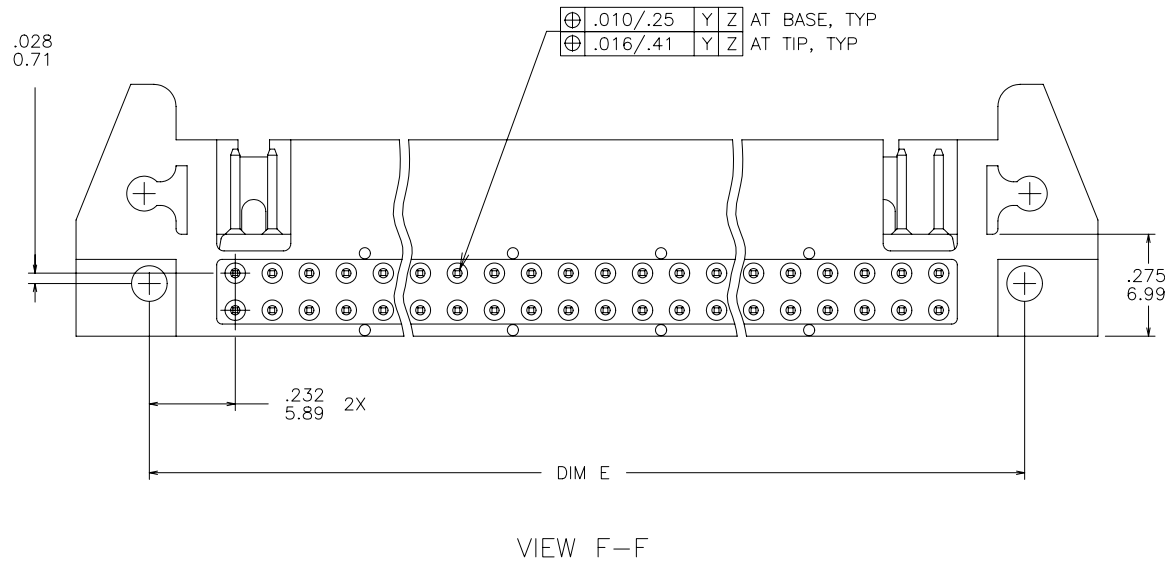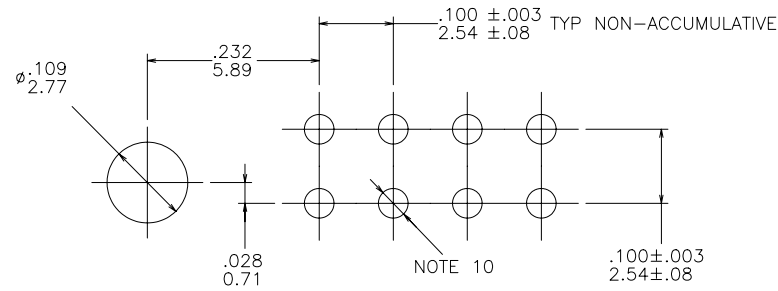

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3			
X				linear	.XXX ±.005/.XX±.13	projection	 title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE	
				angles	.XXX ±.0020/.XXX±.051	INCH/MM		
				dr	J.W.BAIR 7/9/90	scale	product family HEADER size dwg no 66429	
				enr	M.SYMK 7/9/90	1:1		
				chr	M.SYMK 7/9/90		code — sheet 2 of	
				appd	M.SYMK 7/9/90			
sheet index	revision sheet						cage code	

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PDM: Rev:X

STATUS Released 26 Printed: Apr 12, 2011

PRODUCT NUMBER
SEE TABLE


LP LATCH 66177-001
STD LATCH 65824-001
NOTE 9

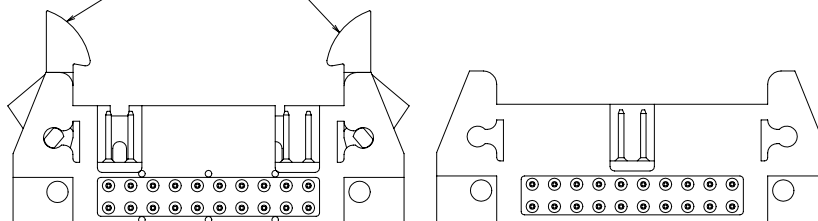


HEADER WITH LATCHES

NOTE 12
2x8 THRU 2x30
(2x10 SHOWN)
STYLE E

BOTTOM VIEW




2x5
STYLE A

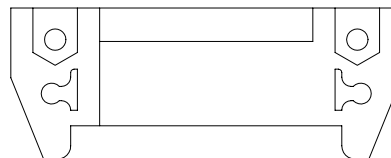


2x8 THRU 2x30
(2x10 SHOWN)
STYLE E


TOP VIEW



2x5
STYLE B







2x7
STYLE C

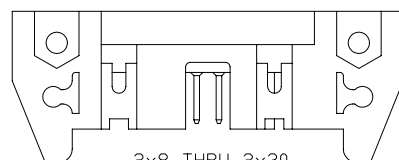

2x8 THRU 2x30
(2x10 SHOWN)
STYLE D

NOTES:

1. RECOMMENDED MOUNTING SCREW SIZE: #2-56 FILLISTER HD MACH SCREW, 3/8" LG. FOR 1/16" & 3/32" BOARD, 7/16 LG FOR 1/8" BOARD.
2. MOLDING MAT'L: 30% GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0, COLOR: BLUE.
3. PIN MATERIAL: 3/4 HARD PHOS.-BRONZE ALLOY UNS C-51000.
4. 1° MAX DRAFT PERMISSIBLE ON ALL SURFACES UNLESS OTHERWISE SPECIFIED.
- ⑤ PIN #1 IDENTIFIER, OPTIONAL.
- ⑥ **-B-** BASIC DIM SHALL BE LOCATED SYMMETRICAL TO DATUM -Y-.
7. PLATING ON LEAD-IN PORTION OF PIN IS MANUFACTURING OPTION.
- ⑧ THESE SLOTS DO NOT EXIST ON 2x5 AND 2x7 SIZES.
- ⑨ THE LATCHES THAT ARE INSTALLED IN SOME HEADERS MUST WITHSTAND A PUSHOUT FORCE OF 2.0 LBS/.9 KGS MIN WHILE IN THE INSTALLATION POSITION.
- ⑩ .040±.003/.102±.08 DIA HOLE TYP FOR SQ PINS, .035±.003/.89±.08 DIA HOLE TYP FOR ROUND PINS.
11. RETENTION FEATURE AVAILABLE ON ROUND PIN P/N'S ONLY. RETENTION INCLUDES THE LETTER 'R' AFTER THE EXISTING P/N. FOR TUBE PKG, P/N INCLUDES THE LETTER 'T' AFTER THE EXISTING P/N.
EXAMPLE: 66429-XXX FOR EXISTING P/N
66429-XXXR FOR RETENTION P/N
66429-XXXT FOR TUBE PKG. P/N
66429-XXXRT FOR RETENTION & TUBE PKG. P/N
15 LBS/6.8 KGS MAX INSERTION AND .25 LBS/.1 KGS MIN RETENTION FORCE WHEN USED IN .89±.08/.035±.003 DIA HOLES AND 1.57/.062 THICK PC BOARD. RETENTION FEATURE LOCATION IS MANUFACTURERS OPTION.
- ⑫ STYLE "E" DOES NOT HAVE ANY POLARIZING SLOTS. THE KEY SLOT IS LOCATED IN THE BOTTOM SIDE.
- ⑬ PIN #1 REMOVED ON DASH# -609.
- ⑭ MOLDING MAT'L: 30% GLASS FILLED POLYESTER. FLAME RETARDANT PER UL-94V-0. COLOR: BLACK.
- ⑮ MOLDING MAT'L: PCT, FLAME RETARDANT PER UL-94V-0. COLOR: BLACK.
- 16 ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- 17 IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 18 THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
19. PLATING OPTION: MAYBE EITHER GOLD OT GXT PLATING AT MANUFACTURER'S OPTION .

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3			
X				linear	.XXX ±.005/.XX±.13	projection		
				linear	.XXX ±.0020/.XXX±.051			
				angles	0° ±2°			
				dr	J.W.BAIR 7/9/90			
				enr	M.SYMK 7/9/90			
				chr	M.SYMK 7/9/90			
				appd	M.SYMK 7/9/90	scale		
						5/1 1:1		
sheet index	revision sheet							

cage code


STATUS Released 66429 Printed: Apr 12, 2011



1		2								3		4									
PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19			HSG MATERIAL									
66429-001	2x5	NO	ROUND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni			PBT BLUE									
-002			SQ				.105/2.67		150μ"/3.81μm Sn												
-003			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-004			SQ				.150/3.81		150μ"/3.81μm Sn												
-005			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-006	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150μ"/3.81μm Sn												
-007	2x7		ROUND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-008			SQ				.105/2.67		150μ"/3.81μm Sn												
-009			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-010			SQ				.150/3.81		150μ"/3.81μm Sn												
-011			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-012	2x7		SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.9	150μ"/3.81μm Sn												
-013	2x8		ROUND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.5	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-014			SQ				.105/2.67		150μ"/3.81μm Sn												
-015			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-016			SQ				.150/3.81		150μ"/3.81μm Sn												
-017			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-018	2x8		SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.5	150μ"/3.81μm Sn												
-019	2x10		ROUND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-020			SQ				.105/2.67		150μ"/3.81μm Sn												
-021			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-022			SQ				.150/3.81		150μ"/3.81μm Sn												
-023			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-024	2x10		SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.5	150μ"/3.81μm Sn												
-025	2x13		ROUND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-026			SQ				.105/2.67		150μ"/3.81μm Sn												
-027			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-028			SQ				.150/3.81		150μ"/3.81μm Sn												
-029			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-030	2x13		SQ	2.060/52.32	1.200/30.48	1.520/38.61	.675/17.15	1.66/42.2	150μ"/3.81μm Sn												
-031	2x17		ROUND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.3	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-032			SQ				.105/2.67		150μ"/3.81μm Sn												
-033			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
-034			SQ				.150/3.81		150μ"/3.81μm Sn												
-035			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni												
66429-036	2x17	NO	SQ	2.460/62.48	1.600/40.64	1.920/48.77	.675/17.15	2.06/52.3	150μ"/3.81μm Sn			PBT BLUE									
							mat'l. code			tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com						
							ltr		ecn no		dr		date					linear		.XX ±.01	
							X													.XXX ±.005	
															angles		.XXXX ±.0020				
																	0" ±2"				
															dr		J.W.BAIR 7/9/90				
															enr		M.SMYK 7/9/90				
															chr		M.SMYK 7/9/90				
								appd		M.SMYK 7/9/90											
sheet index		revision sheet										INCH/MM		product family HEADERS		code —					
												scale 1:1		A		sheet 4 of					



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	HSG MATERIAL
66429-037	2x20	NO	RND	2.760/70.10	1.900/48.26	2.220/56.39	.105/2.67	2.36/59.94	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	PBT BLUE
↑ -038	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-039	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-040	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
-041	↓	↑	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-042	2x20	↑	SQ	2.760/70.10	1.900/48.26	2.220/56.39	.675/17.15	2.36/59.94	150μ"/3.81μm Sn	↑
-043	2x25	↑	RND	3.260/82.80	2.400/60.96	2.720/69.09	.105/2.67	2.86/72.64	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-044	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-045	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-046	↑	↑	SQ	↑	↑	↑	.150/3.81	↓	150μ"/3.81μm Sn	↑
-047	↓	↑	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-048	2x25	NO	SQ	3.260/82.80	2.400/60.96	2.720/69.09	.675/17.15	2.86/72.64	150μ"/3.81μm Sn	↑
-049	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.84	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-050	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-051	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-052	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
-053	↓	↑	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-054	2x5	↑	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	150μ"/3.81μm Sn	↑
-055	2x7	↑	RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.92	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-056	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-057	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-058	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
-059	↓	↑	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-060	2x7	↑	SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.92	150μ"/3.81μm Sn	↑
-061	2x8	↑	RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.46	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-062	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-063	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-064	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
-065	↓	↑	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-066	2x8	↑	SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.46	150μ"/3.81μm Sn	↑
-067	2x10	↑	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.54	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-068	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-069	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-070	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
-071	↓	↑	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
66429-072	2x10	STD	SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.54	150μ"/3.81μm Sn	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	
					.xxx ±.0020/.xxx±.051		
				angles	0° ±2°		
				dr	J.W.BAIR 7/9/90	INCH/MM	product family
				enr	M.SYMK 7/9/90		HEADER
				chr	M.SYMK 7/9/90	scale	size dwg no
				appd	M.SYMK 7/9/90	1:1	A
sheet index	revision sheet						code
							66429
							5 of



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	HSG MATERIAL
66429-073	2x13	STD	RND	2.060/52,32	1.200/30,480	1.520/38,61	.105/ 2,67	1.66/42,16	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	PBT BLUE
↑ -074	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-075	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-076	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -077	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-078	2x13	↑	SQ	2.060/52,32	1.200/30,480	1.520/38,61	.675/17,15	1.66/42,16	150μ"/3.81μm Sn	↑
-079	2x17	↑	RND	2.460/62,48	1.600/40,640	1.920/48,77	.105/ 2,67	2.06/52,32	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
↑ -080	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-081	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
↓ -082	↓	↓	SQ	↓	↓	↓	.150/ 3,81	↓	150μ"/3.81μm Sn	↓
-083	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-084	2x17	↑	SQ	2.460/62,48	1.600/40,640	1.920/48,77	.675/17,15	2.06/52,32	150μ"/3.81μm Sn	↑
-085	2x20	↑	RND	2.760/ 70,1	1.900/48,260	2.220/56,39	.105/ 2,67	2.36/59,94	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
↑ -086	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-087	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-088	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -089	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-090	2x20	↑	SQ	2.760/ 70,1	1.900/48,260	2.220/56,39	.675/17,15	2.36/59,94	150μ"/3.81μm Sn	↑
-091	2x25	↑	RND	3.260/ 82,8	2.400/60,960	2.720/69,09	.105/ 2,67	2.86/72,64	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
↑ -092	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-093	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
↓ -094	↓	↓	SQ	↓	↓	↓	.150/ 3,81	↓	150μ"/3.81μm Sn	↓
-095	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-096	2x25	STD	SQ	3.260/ 82,8	2.400/60,960	2.720/69,09	.675/17,15	2.86/72,64	150μ"/3.81μm Sn	↑
-097	2x30	NO	RND	3.760/ 95,5	2.900/73,660	3.220/81,79	.105/ 2,67	3.36/85,34	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
↑ -098	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-099	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-100	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -101	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-102	↑	NO	SQ	↑	↑	↑	.675/17,15	↑	150μ"/3.81μm Sn	↑
↓ -103	↓	STD	RND	↓	↓	↓	.105/ 2,67	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-104	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-105	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
↓ -106	↓	↓	SQ	↓	↓	↓	.150/ 3,81	↓	150μ"/3.81μm Sn	↓
↓ -107	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
66429-108	2x30	STD	SQ	3.760/ 95,5	2.900/73,660	3.220/81,79	.675/17,15	3.36/85,34	150μ"/3.81μm Sn	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X				linear	.XXX ±.005/.XX±.13	projection	
				angles	.XXX ±.0020/.XXX±.051	INCH/MM	
				dr	J.W.BAIR 7/9/90	scale	1:1
				enr	M.SYMK 7/9/90		
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90		
sheet index	revision sheet						

title		product family		code
HEADER, QUICKIE		HEADER		-
SEA-HORSE, RIGHT-ANGLE		size dwg no		sheet
A		66429		6 of



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG. MATERIAL
66429-109	2x5	ND	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/ 2. 67	. 86/21. 84	30µ"/0. 76µm Au OVER 50µ"/1. 27µm Ni		PBT BLUE
-110	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-111	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-112	2x10			1. 760/ 44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-113	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-114	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-115	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-116	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-117	2x30	ND		3. 760/95. 50	2. 900/73. 66	3. 220/81. 79		3. 36/85. 34		D	
-118	2x5	STD		1. 260/32. 00	. 400/10. 16	. 720/18. 29		. 86/21. 84		A	
-119	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-120	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-121	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-122	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-123	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-124	2x20			2. 760/ 70. 1	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-125	2x25			3. 260/ 82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-126	2x30	STD	SQ	3. 760/ 95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 34	30µ"/0. 76µm Au OVER 50µ"/1. 27µm Ni	D	
-127	2x5	ND	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 84	30µ"/0. 76µm GXT WITH Au FLASH	A	
-128	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-129	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-130	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-131	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-132	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-133	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-134	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-135	2x30	ND		3. 760/95. 50	2. 900/73. 66	3. 220/81. 79		3. 36/85. 34		D	
-136	2x5	STD		1. 260/32. 00	. 400/10. 16	. 720/18. 29		. 86/21. 84		A	
-137	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-138	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-139	2x10			1. 760/ 44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-140	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-141	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-142	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-143	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
66429-144	2x30	STD	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/ 3. 81	3. 36/85. 34	30µ"/0. 76µm GXT WITH Au FLASH	D	PBT BLUE

mat'l. code --				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection ⊕	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.xxxx ±.0020/.xxx±.051		
				angles	0° ±2°	INCH/MM	product family size dwg no
				dr	J.W.BAIR 7/9/90		
				enrg	M.SYMK 7/9/90	scale 1:1	A 66429
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90		
sheet index	revision sheet						

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG. MATERIAL
66429-145	2x5	LP	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	A	PBT BLUE
↑ -146	↑		SQ	↑	↑	↑	.105/ 2.67	↑	150µ"/3.81µm Sn	↑	↑
-147			RND	↑	↑	↑	.150/3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-148			SQ	↑	↑	↑	.150/3.81		150µ"/3.81µm Sn		
↓ -149	↓		SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↓	
-150	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	150µ"/3.81µm Sn	A	
-151	2x7		RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.92	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	C	
-152	↑		SQ	↑	↑	↑	.105/2.67	↑	150µ"/3.81µm Sn	↑	
-153	↑		RND	↑	↑	↑	.150/3.81	↑	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-154			SQ	↑	↑	↑	.150/3.81		150µ"/3.81µm Sn		
↓ -155	↓		SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↓	
-156	2x7		SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.92	150µ"/3.81µm Sn	C	
-157	2x8		RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.46	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	D	
-158			SQ	↑	↑	↑	.105/2.67	↑	150µ"/3.81µm Sn	↑	
-159			RND	↑	↑	↑	.150/3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-160			SQ	↑	↑	↑	.150/3.81		150µ"/3.81µm Sn		
↓ -161			SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-162	2x8		SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.46	150µ"/3.81µm Sn		
-163	2x10		RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.54	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-164	↑		SQ	↑	↑	↑	.105/2.67	↑	150µ"/3.81µm Sn		
-165			RND	↑	↑	↑	.150/3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-166			SQ	↑	↑	↑	.150/3.81		150µ"/3.81µm Sn		
↓ -167	↓		SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-168	2x10		SQ	1.760/ 44.70	.900/22.860	1.220/30.99	.675/17.15	1.36/34.54	150µ"/3.81µm Sn		
-169	2x13		RND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.16	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
↑ -170	↑		SQ	↑	↑	↑	.105/2.67	↑	150µ"/3.81µm Sn		
-171			RND	↑	↑	↑	.150/3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-172			SQ	↑	↑	↑	.150/3.81		150µ"/3.81µm Sn		
↓ -173	↓		SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-174	2x13		SQ	2.060/52.32	1.200/30.48	1.520/38.61	.675/17.15	1.66/42.16	150µ"/3.81µm Sn		
-175	2x17		RND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.32	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
↑ -176	↑		SQ	↑	↑	↑	.105/2.67	↑	150µ"/3.81µm Sn		
-177			RND	↑	↑	↑	.150/3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-178			SQ	↑	↑	↑	.150/3.81		150µ"/3.81µm Sn		
↓ -179	↓		SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↓	
66429-180	2x17	LP	SQ	2.460/62.48	1.600/40.64	1.920/48.77	.675/17.15	2.06/52.32	150µ"/3.81µm Sn	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified	
-------------	--	--	--	---------------------------------------	--



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG. MATERIAL
66429-181	2x20	LP	RND	2.760/70.10	1.900/48.26	2.220/56.39	.105/ 2.67	2.36/59.94	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE
-182			SQ				.105/ 2.67		150µ"/3.81µm Sn		
-183			RND				.150/ 3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-184			SQ				.150/ 3.81		150µ"/3.81µm Sn		
-185			SQ				.675/17.15		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-186	2x20		SQ	2.760/70.10	1.900/48.26	2.220/56.39	.675/17.15	2.36/59.94	150µ"/3.81µm Sn		
-187	2x25		RND	3.260/82.80	2.400/60.96	2.720/69.09	.105/ 2.67	2.86/72.64	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-188			SQ				.105/ 2.67		150µ"/3.81µm Sn		
-189			RND				.150/ 3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-190			SQ				.150/ 3.81		150µ"/3.81µm Sn		
-191			SQ				.675/17.15		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	D	
-192	2x25		SQ	3.260/ 82,8	2.400/60,960	2.720/69.09	.675/17.15	2.86/72.64	150µ"/3.81µm Sn		
-193	2x30		RND	3.760/ 95,5	2.900/73,660	3.220/81.79	.105/ 2.67	3.36/85.34	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-194			SQ				.105/ 2.67		150µ"/3.81µm Sn		
-195			RND				.150/ 3.81		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-196			SQ				.150/ 3.81		150µ"/3.81µm Sn		
-197			SQ				.675/17.15		30µ"/0.76µm Au OVER 50µ"/1.27µm Ni		
-198	2x30			3.760/ 95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	150µ"/3.81µm Sn	D	
-199	2x5			1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	A	
-200	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.92		C	
-201	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-202	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54			
-203	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-204	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-205	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94			
-206	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.64			
-207	2x30		SQ	3.760/95.50	2.900/73.66	3.220/81.79	.105/ 2.67	3.36/85.34	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	D	
-208	2x5		RND	1.260/32.00	.400/10.16	.720/18.29	.150/ 3.81	.86/21.84	30µ"/0.76µm GXT WITH Au FLASH	A	
-209	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.92		C	
-210	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-211	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54			
-212	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-213	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-214	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94			
-215	2x25			3.260/ 82.80	2.400/60.96	2.720/69.09		2.86/72.64			
66429-216	2x30	LP	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/ 3,81	3,36/85,34	30µ"/0.76µm GXT WITH Au FLASH	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.XXXX ±.0020/.XXX±.051		
				angles	0° ±2°	INCH/MM	product family size dwg no
				dr	J.W.BAIR 7/9/90	scale 1:1	A 66429
				enr	M.SYMK 7/9/90		
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90		
sheet index	revision sheet						code




PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-217	2x5	ND	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/ 2. 67	. 86/21. 84	30µ"/0. 76µm GXT WITH Au FLASH	A	PBT BLUE
-218	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-219	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-220	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-221	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-222	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-223	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-224	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-225	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/ 2. 67	3. 36/85. 34		D	
-226	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 84		A	
-227	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-228	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-229	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-230	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-231	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-232	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-233	2x25			3. 260/ 82. 8	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-234	2x30	ND	SQ	3. 760/ 95. 5	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 34		D	
-235	2x5	STD	RND	1. 260/ 32	. 400/10. 16	. 720/18. 29	. 105/ 2. 67	. 86/21. 84		A	
-236	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-237	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-238	2x10			1. 760/ 44. 7	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-239	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-240	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-241	2x20			2. 760/ 70. 1	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-242	2x25			3. 260/ 82. 8	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-243	2x30		RND	3. 760/ 95. 5	2. 900/73. 66	3. 220/81. 79	. 105/ 2. 67	3. 36/85. 34		D	
-244	2x5		SQ	1. 260/ 32	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 84		A	
-245	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-246	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-247	2x10			1. 760/ 44. 7	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-248	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-249	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-250	2x20			2. 760/ 70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-251	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
66429-252	2x30	STD	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 34	30µ"/0. 76µm GXT WITH Au FLASH	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection	www.fciconnect.com		
X					.XXX ±.005/.XX±.13		title		
				angles	.xxxx ±.0020/.xxx±.051		SEA-HORSE, RIGHT-ANGLE		
				dr	J.W.BAIR 7/9/90	INCH/MM	product family		
				enr	M.SYMK 7/9/90		HEADER		
				chr	M.SYMK 7/9/90	scale	size dwg no		
				appd	M.SYMK 7/9/90	1:1	A 66429		
sheet index	revision sheet						code		



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-253	2x5	LP	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.84	30µ"/0.76µM GXT WITH Au FLASH	A	PBT BLUE
↑ -254	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-255	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-256	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-257	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-258	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-259	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-260	2x25		↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
-261	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.34		D	
-262	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84		A	
-263	2x7		↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-264	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-265	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-266	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-267	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-268	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-269	2x25		↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
-270	2x30	LP	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	30µ"/0.76µM GXT WITH Au FLASH	D	
-271	2x5	NO	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	15µ"/0.3876µM GXT 50µ"/1.27µm Ni	A	
-272	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	
-273	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-274	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-275	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-276	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-277	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-278	2x25			3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
-279	2x30			3.760/95.50	2.900/73.66	3.220/81.79	.105/ 2.67	3.36/85.34		D	
-280	2x5			1.260/32.00	.400/10.16	.720/18.29	.150/ 3.81	.86/21.84		A	
-281	2x7			1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-282	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-283	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-284	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-285	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-286	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-287	2x25		↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
66429-288	2x30	NO	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/ 3.81	3.36/85.34	15µ"/0.3876µM GXT 50µ"/1.27µm Ni	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title
					.xxx ±.0020/.xxx±.051		
				angles	0° ±2°		SEA-HORSE, RIGHT-ANGLE
				dr	J.W.BAIR 7/9/90		
				enr	M.SYMK 7/9/90	INCH/MM	product family
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90	scale	size dwg no
sheet index	revision sheet					1:1	A
							66429
							code
							sheet 11 of



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-289	2x5	NO	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	A	PBT BLUE
↑ -290	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-291	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-292	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-293	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-294	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-295	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-296	2x25	↓	↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64	↓	↓	↓
-297	2x30	NO	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	↑	D	↑
-298	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	↑	A	↑
-299	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-300	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-301	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-302	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-303	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-304	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-305	2x25	↑	↑	3.260/82.80	2.400/60.96	2.720/69.09	↑	2.86/72.64	↑	↑	↑
-306	2x30	↑	↑	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.34	↑	D	↑
-307	2x5	↑	↑	1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.84	↑	A	↑
-308	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-309	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-310	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-311	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-312	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-313	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-314	2x25	↑	↓	3.260/82.80	2.400/60.96	2.720/69.09	↑	2.86/72.64	↑	↓	↑
-315	2x30	↑	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.34	↑	D	↑
-316	2x5	↑	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	↑	A	↑
-317	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-318	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-319	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-320	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-321	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-322	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-323	2x25	↑	↓	3.260/82.80	2.400/60.96	2.720/69.09	↑	2.86/72.64	↑	↑	↑
66429-324	2x30	STD	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection	title		
X					.XXX ±.005/.XX±.13		HEADER, QUICKIE		
				angles	.XXX ±.0020/.XXX±.051		SEA-HORSE, RIGHT-ANGLE		
				dr	0° ±2°	INCH/MM	product family		code
				enr	J.W.BAIR 7/9/90	scale	HEADER		—
				chr	M.SYMK 7/9/90	1:1	size dwg no		sheet
				appd	M.SYMK 7/9/90		A 66429		12 of
sheet index	revision sheet								



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-325	2x5	LP	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	A	PBT BLUE
↑ -326	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-327	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-328	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-329	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-330	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-331	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↓	
-332	2x25			3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64			
-333	2x30			3.760/95.50	2.900/73.66	3.220/81.79	.105/ 2.67	3.36/85.34		D	
-334	2x5			1.260/32.00	.400/10.16	.720/18.29	.150/ 3.81	.86/21.84		A	
-335	2x7			1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-336	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-337	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-338	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-339	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-340	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94			
-341	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.64			
-342	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.34		D	
-343	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84		A	
-344	2x7		↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-345	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-346	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-347	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-348	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-349	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94			
-350	2x25	↓	↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64			
-351	2x30	LP	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	D	
-352	UNAVAILABLE										
-353											
-354											
-355											
-356											
-357											
-358											
-359											
66429-360	UNAVAILABLE										PBT BLUE

mat'l. code --				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection	title		
X					.XXX ±.005/.XX±.13	INCH/MM	HEADER, QUICKIE		
				angles	.XXX ±.0020/.XXX±.051	scale	SEA-HORSE, RIGHT-ANGLE		
				dr	0° ±2°	1:1	product family		
				enr	J.W.BAIR 7/9/90		HEADER		
				chr	M.SYMK 7/9/90		size dwg no		
				appd	M.SYMK 7/9/90		A 66429		
sheet index	revision sheet						code		
							sheet 13 of		

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-361									U N A V A I L A B L E		PBT BLUE
↑ -362	2x5	NO	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	B	↑
-363	↑	NO	RND	↑	↑	↑	↑	↑	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	↑	
-364		NO	RND						30μ"/0.76μm GXT WITH Au FLASH		
-365		NO	SQ						150μ"/3.81μm Sn		
-366		STD	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-367		STD	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-368		STD	RND						30μ"/0.76μm GXT WITH Au FLASH		
-369		STD	SQ						150μ"/3.81μm Sn		
-370		LP	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-371		LP	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-372		LP	RND						30μ"/0.76μm GXT WITH Au FLASH		
-373		LP	SQ				.105/ 2.67		150μ"/3.81μm Sn		
-374		NO	RND				.150/ 3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-375		NO	RND				↑		15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-376		NO	RND						30μ"/0.76μm GXT WITH Au FLASH		
-377		NO	SQ						150μ"/3.81μm Sn		
-378		STD	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-379		STD	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-380		STD	RND						30μ"/0.76μm GXT WITH Au FLASH		
-381		STD	SQ						150μ"/3.81μm Sn		
-382		LP	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-383		LP	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-384		LP	RND						30μ"/0.76μm GXT WITH Au FLASH		
-385		LP	SQ				.150/3.81		150μ"/3.81μm Sn		
-386		NO	SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-387		NO	↑				↑		15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-388		NO							30μ"/0.76μm GXT WITH Au FLASH		
-389		NO							150μ"/3.81μm Sn		
-390		STD							30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-391		STD							15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-392		STD							30μ"/0.76μm GXT WITH Au FLASH		
-393		STD							150μ"/3.81μm Sn		
-394		LP							30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
↓ -395		LP	↓				↓		15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
66429-396	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	30μ"/0.76μm GXT WITH Au FLASH	B	PBT BLUE

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

A

A

B

B



mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection		title	
X					.XXX ±.005/.XX±.13			HEADER, QUICKIE	
					.XXXX ±.0020/.XXX±.051			SEA-HORSE, RIGHT-ANGLE	
				angles	0° ±2°			product family	code
				dr	J.W.BAIR 7/9/90	INCH/MM		HEADER	—
				enr	M.SYMK 7/9/90			size dwg no	—
				chr	M.SYMK 7/9/90				
				appd	M.SYMK 7/9/90	scale	1:1	A	66429
sheet index	revision sheet								

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19		STYLE	HSG MATERIAL
66429-397	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	150μ"/3.81μm Sn		B	PBT BLUE
-398	2x10	66258-001	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.54	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		D	
-399	2x5	NO	SQ	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.84	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		A	
-400		STD					.105/2.67					
-401		LP					.105/2.67					
-402		NO					.150/3.81					
-403		STD					.150/3.81					
-404		LP					.150/3.81				A	
-405		NO					.150/3.81				B	
-406		STD					.150/3.81					
-407		LP					.150/3.81					
-408		NO					.150/3.81					
-409		STD					.150/3.81					
-410	2x5	LP		1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.84			B	
-411	2x7	NO		1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.92			C	
-412		STD					.105/2.67					
-413		LP					.105/2.67					
-414		NO					.150/3.81					
-415		STD					.150/3.81					
-416	2x7	LP		1.460/37.08	.600/15.24	.920/23.37	.150/3.81	1.06/26.92			C	
-417	2x8	NO		1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.46			D	
-418		STD					.105/2.67					
-419		LP					.105/2.67					
-420		NO					.150/3.81					
-421		STD					.150/3.81					
-422	2x8	LP		1.560/39.62	.700/17.78	1.020/25.91	.150/3.81	1.16/29.46				
-423	2x10	NO		1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.54				
-424		STD					.105/2.67					
-425		LP					.105/2.67					
-426		NO					.150/3.81					
-427		STD					.150/3.81					
-428	2x10	LP		1.760/44.70	.900/22.86	1.220/30.99	.150/3.81	1.36/34.54				
-429	2x13	NO		2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.16				
-430		STD					.105/2.67					
-431		LP					.105/2.67					
66429-432	2x13	NO	SQ	2.060/55.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.16	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		D	PBT BLUE

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com					
ltr		ecn no		dr		date		linear		.XX ±.01/.X±.3		projection		title	
X										.XXX ±.005/.XX±.13				HEADER, QUICKIE	
								angles		.XXXX ±.0020/.XXX±.051				SEA-HORSE, RIGHT-ANGLE	
										0° ±2°				product family	
								dr		J.W.BAIR 7/9/90				HEADER	
								engr		M.SYMK 7/9/90				code	
								chr		M.SYMK 7/9/90		scale		-	
								appd		M.SYMK 7/9/90		1:1		sheet	
sheet index		revision sheet												15 of	

1 2

ACAD

PDM: Rev:X

STATUS Released 26 Printed: Apr 12, 2011

cage code

4

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

1

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-469	2x12	STD	SQ	1.960/49.80	1.100/27.94	1.420/36.07	.105/2.67	1.56/39.62	150µ"/3.81µm Sn	D	PBT BLUE
-470		LP	SQ				.105/2.67		150µ"/3.81µm Sn		
-471		NO	RND				.150/3.81		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-472		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-473		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-474		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-475		STD							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-476		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-477		NO							30µ"/.76µm GXT WITH Au FLASH		
-478		STD							30µ"/.76µm GXT WITH Au FLASH		
-479		LP	RND						30µ"/.76µm GXT WITH Au FLASH		
-480		NO	SQ						150µ"/3.81µm Sn		
-481		STD							150µ"/3.81µm Sn		
-482		LP					.150/3.81		150µ"/3.81µm Sn		
-483		NO					.105/2.67		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-484		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-485		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-486		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-487		STD					.105/2.67		30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-488		LP					.150/3.81		30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-489		NO					.150/3.81		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-490		STD					.150/3.81		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-491		LP					.675/17.15		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-492		NO							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-493		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-494		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-495		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-496		STD							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-497		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-498		NO							30µ"/.76µm GXT WITH Au FLASH		
-499		STD							30µ"/.76µm GXT WITH Au FLASH		
-500		LP							30µ"/.76µm GXT WITH Au FLASH		
-501		NO							150µ"/3.81µm Sn		
-502		STD							150µ"/3.81µm Sn		
-503	2x12	LP	SQ	1.960/49.80	1.100/27.94	1.420/36.07	.675/17.15	1.56/39.62	150µ"/3.81µm Sn		
66429-504	2x15	NO	RND	2.260/57.40	1.400/35.56	1.720/43.69	.105/2.67	1.86/47.24	15µ"/.38µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE


mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.XXXX ±.0020/.XXX±.051		
				angles	0° ±2°		product family size
				dr	J.W.BAIR 7/9/90	INCH/MM	
				enr	M.SYMK 7/9/90		code - sheet 17 of
				chr	M.SYMK 7/9/90	scale	
				appd	M.SYMK 7/9/90	1:1	
sheet index	revision sheet						

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-505	2x15	STD	RND	2.260/ 57,4	1.400/35,560	1.720/43,69	.105/ 2,67	1.86/47,24	15µ"/.38µM Au OVER 50µ"/1.27µm Ni	D	PBT BLUE
-506		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-507		NO							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-508		STD							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-509		LP							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-510		NO							30µ"/.76µM GXTWITH Au FLASH		
-511		STD							30µ"/.76µM GXTWITH Au FLASH		
-512		LP	RND						30µ"/.76µM GXTWITH Au FLASH		
-513		NO	SQ						150µ"/3.81µm Sn		
-514		STD	SQ						150µ"/3.81µm Sn		
-515		LP	SQ				.105/ 2,67		150µ"/3.81µm Sn		
-516		NO	RND				.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-517		STD							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-518		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-519		NO							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-520		STD							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-521		LP							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-522		NO							30µ"/.76µM GXTWITH Au FLASH		
-523		STD							30µ"/.76µM GXTWITH Au FLASH		
-524		LP	RND						30µ"/.76µM GXTWITH Au FLASH		
-525		NO	SQ						150µ"/3.81µm Sn		
-526		STD							150µ"/3.81µm Sn		
-527		LP					.150/ 3,81		150µ"/3.81µm Sn		
-528		NO					.105/ 2,67		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-529		STD							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-530		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-531		NO							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-532		STD							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-533		LP					.105/ 2,67		30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-534		NO					.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-535		STD					.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-536		LP					.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-537		NO					.675/17,15		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-538		STD							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-539		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
66429-540	2x15	NO	SQ	2.260/ 57,4	1.400/35,560	1.720/43,69	.675/17,15	1.86/47,24	30µ"/.76µM Au OVER 50µ"/1.27µm Ni	D	PBT BLUE

mat'l. code --				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection 	INCH/MM	scale 1:1	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE	
X					.XXX ±.005/.XX±.13					
					.XXXX ±.0020/.XXX±.051					
					angles 0° ±2°					
					dr J.W.BAIR 7/9/90					
				enr M.SYMK 7/9/90					product family size	code —
				chr M.SYMK 7/9/90					dwg no	sheet 18 of
				appd M.SYMK 7/9/90						
sheet index	revision sheet									

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-541	2x15	STD	SQ	2.260/ 57.40	1.400/35.56	1.720/43.69	.675/17.15	1.86/47.24	30µ"/.76µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE
-542		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-543		NO							30µ"/.76µm GXTWITH Au FLASH		
-544		STD							30µ"/.76µm GXTWITH Au FLASH		
-545		LP							30µ"/.76µm GXTWITH Au FLASH		
-546		NO							150µ"/3.81µm Sn		
-547		STD							150µ"/3.81µm Sn		
-548	2x15	LP	SQ	2.260/57.40	1.400/35.56	1.720/43.69	.675/17.15	1.86/47.24	150µ"/3.81µm Sn		
-549	2x22	NO	RND	2.960/75.20	2.100/53.34	2.420/61.47	.105/2.06	2.56/65.02	15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-550		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-551		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-552		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-553		STD							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-554		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-555		NO							30µ"/.76µm GXTWITH Au FLASH		
-556		STD							30µ"/.76µm GXTWITH Au FLASH		
-557		LP	RND						30µ"/.76µm GXTWITH Au FLASH		
-558		NO	SQ						150µ"/3.81µm Sn		
-559		STD	SQ						150µ"/3.81µm Sn		
-560		LP	SQ				.105/2.67		150µ"/3.81µm Sn		
-561		NO	RND				.150/3.81		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-562		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-563		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-564		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-565		STD							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-566		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-567		NO							30µ"/.76µm GXTWITH Au FLASH		
-568		STD							30µ"/.76µm GXTWITH Au FLASH		
-569		LP	RND						30µ"/.76µm GXTWITH Au FLASH		
-570		NO	SQ						150µ"/3.81µm Sn		
-571		STD							150µ"/3.81µm Sn		
-572		LP					.150/3.81		150µ"/3.81µm Sn		
-573		NO					.105/2.67		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-574		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-575		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
66429-576	2x22	NO	SQ	2.960/ 75,2	2.100/53,340	2.420/61,47	.105/ 2,67	2.56/65,02	30µ"/.76µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE
				mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
				ltr	ecn no	dr	date	linear	projection		
				X				.XX ±.01/.X±.3		title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE	
								.XXX ±.005/.XX±.13			
								.XXX ±.0020/.XXX±.051		product family size dwg no	
								0° ±2°			
								dr J.W.BAIR 7/9/90	INCH/MM	code —	
								enr M.SYMK 7/9/90			
								chr M.SYMK 7/9/90	scale	sheet 19 of	
								appd M.SYMK 7/9/90	1:1		
				sheet index	revision sheet					cage code	



A

B

PRODUCT NUMBER	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL	NOTE 13
66429-577	2x22	STD	SQ	2.960/75.18	2.100/53.34	2.420/61.47	.105/2.67	2.56/65.02	30u"/.76u Au OVER 50u"/1.27u NI	D	PBT BLUE	
-578		LP					.105/2.67		30u"/.76u Au OVER 50u"/1.27u NI			
-579		NO					.150/3.81		15u"/.38u Au OVER 50u"/1.27u NI			
-580		STD					.150/3.81		15u"/.38u Au OVER 50u"/1.27u NI			
-581		LP					.150/3.81		15u"/.38u Au OVER 50u"/1.27u NI			
-582		NO					.675/17.15		15u"/.38u Au OVER 50u"/1.27u NI			
-583		STD							15u"/.38u Au OVER 50u"/1.27u NI			
-584		LP							30u"/.76u Au OVER 50u"/1.27u NI			
-585		NO							30u"/.76u Au OVER 50u"/1.27u NI			
-586		STD							30u"/.76u Au OVER 50u"/1.27u NI			
-587		LP							30u"/.76u Au OVER 50u"/1.27u NI			
-588		NO							30u"/.76u GXT/GOLD FLASH			
-589		STD							30u"/.76u GXT/GOLD FLASH			
-590		LP							30u"/.76u GXT/GOLD FLASH			
-591		NO							150u"/3.18u Sn			
-592		STD							150u"/3.18u Sn			
-593	2x22	LP	SQ	2.960/75.18	2.100/53.34	2.420/61.47	.675/17.15	2.56/65.02	150u"/3.18u Sn	D		
-594									UNAVAILABLE			
-595	2x13	STD	RND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	50u"/1.27u Au OVER 50u"/1.27u NI	D		
-596	2x17	STD		2.460/62.48	1.600/40.64	1.920/48.77	.150/3.81	2.06/53.3		D		
-597	2x7	LP		1.460/37.08	.600/15.24	.920/23.67	.105/2.67	1.06/26.9		C		
-598	2x13	LP		2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.2		D		
-599	2x13	NO		2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2		D		
-600	2x17	NO		2.460/62.48	1.600/40.64	1.920/48.77	.150/3.81	2.06/53.3		D		
-601	2x7	NO		1.460/37.08	.600/15.24	.920/23.67	.105/2.67	1.06/26.9		C		
-602	2x13	NO	RND	2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.2	50u"/1.27u Au OVER 50u"/1.27u NI	D		
-603	2x13	STD	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	30u"/.76u GXT/GOLD FLASH	D		
-604	2x13	NO	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	30u"/.76u GXT/GOLD FLASH	D		
-605	2x25	STD	SQ	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u GXT/GOLD FLASH	D		
-606	2x25	NO	SQ	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u GXT/GOLD FLASH	D		
-607	2x25	STD	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E		
-608	2x25	NO	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E		
-609	2x25	STD	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E		
-610	2x25	NO	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E	PBT BLUE	NOTE 13
-611	2x25	STD	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	D	PBT BLACK	NOTE 14
-612	2x25	NO	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	D	PBT BLACK	NOTE 14
66429-734	2x17	LP	RND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.66	2.06/53.3	30u"/.76u Au OVER 50u"/1.27u NI	D	PCT BLACK	NOTE 15

A

B

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection	title	
X					.XXX ±.005/.XX±.13		HEADER, QUICKIE	
					.XXX ±.0020/.XXX±.051		SEA-HORSE, RIGHT-ANGLE	
				angles	0° ±2°		product family	
				dr	J.W.BAIR 7/9/90		HEADER	
				enr	M.SYMK 7/9/90	scale	size dwg no	
				chr	M.SYMK 7/9/90		A 66429	
				appd	M.SYMK 7/9/90	1:1	sheet	
sheet index	revision sheet						20 of	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[66429-069](#) [66429-085](#) [66429-147](#) [66429-169](#) [66429-463](#) [66429-049](#) [66429-051](#) [66429-055](#) [66429-063](#) [66429-073](#) [66429-081](#) [66429-093](#) [66429-103](#) [66429-105](#) [66429-175](#) [66429-238](#) [66429-239](#) [66429-241](#) [66429-242](#) [66429-511](#) [66429-521](#) [66429-079](#) [66429-061](#) [66429-069LF](#) [66429-085LF](#) [66429-091LF](#) [66429-147LF](#) [66429-169LF](#) [66429-362LF](#) [66429-463LF](#) [66429-557LF](#) [66429-007LF](#) [66429-019LF](#) [66429-031LF](#) [66429-039LF](#) [66429-049LF](#) [66429-051LF](#) [66429-055LF](#) [66429-057LF](#) [66429-059LF](#) [66429-073LF](#) [66429-081LF](#) [66429-093LF](#) [66429-097LF](#) [66429-103LF](#) [66429-105LF](#) [66429-134LF](#) [66429-136LF](#) [66429-142LF](#) [66429-163LF](#) [66429-177LF](#) [66429-187LF](#) [66429-189LF](#) [66429-212LF](#) [66429-215LF](#) [66429-235LF](#) [66429-236LF](#) [66429-237LF](#) [66429-239LF](#) [66429-240LF](#) [66429-241LF](#) [66429-242LF](#) [66429-243LF](#) [66429-254LF](#) [66429-256LF](#) [66429-258LF](#) [66429-277LF](#) [66429-298LF](#) [66429-304LF](#) [66429-331LF](#) [66429-464LF](#) [66429-475LF](#) [66429-476LF](#) [66429-511LF](#) [66429-520LF](#) [66429-466LF](#) [66429-418](#) [66429-418LF](#) [66429-466](#) [66429-079LF](#) [66429-067LF](#) [66429-075LF](#) [66429-061LF](#) [66429-091](#) [66429-067](#) [66429-193](#) [66429-367LF](#) [66429-274LF](#) [66429-452LF](#) [66429-015LF](#) [66429-257LF](#) [66429-302LF](#) [66429-301LF](#) [66429-300LF](#)