
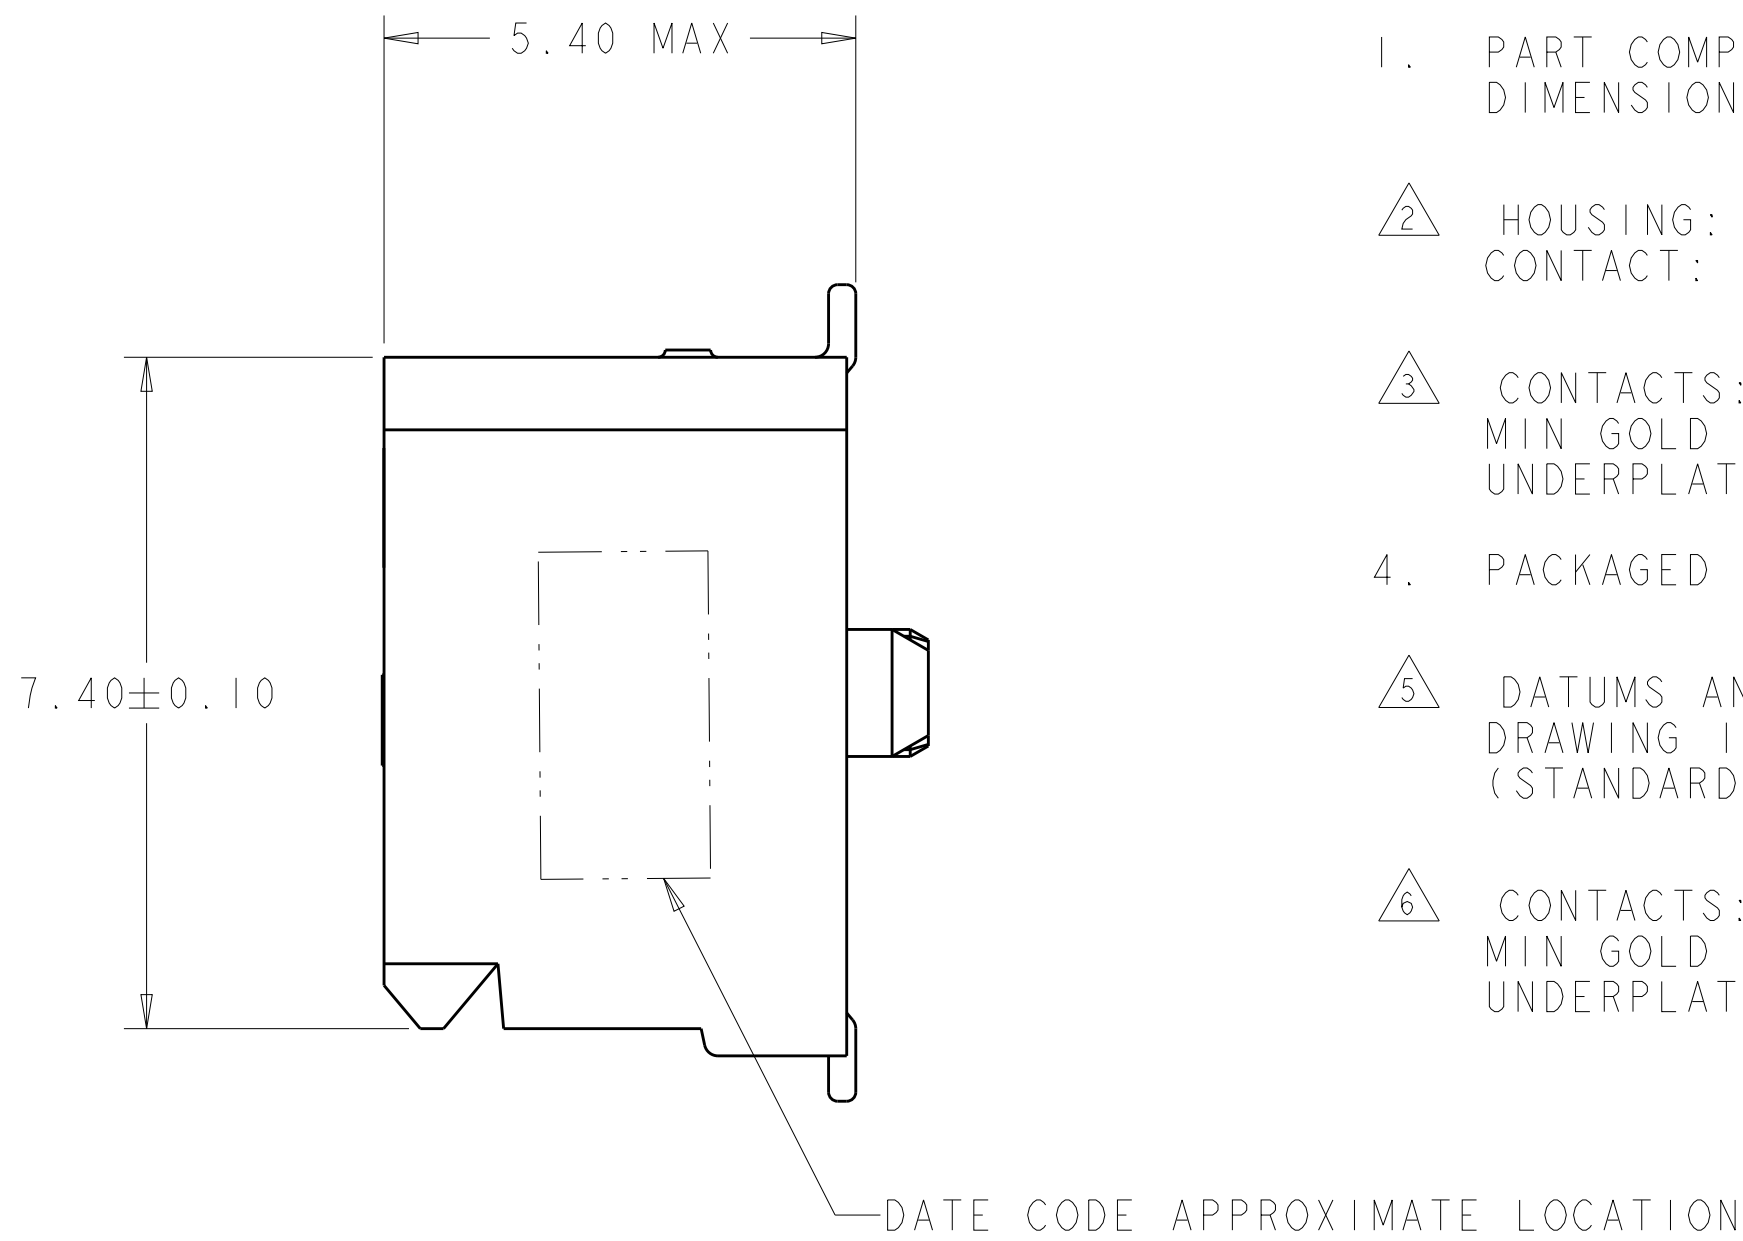


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
ES	00		J1	REVISED PER ECO-11-005033	09MAY2011	RK	HMR	
			K	REVISED PER ECO-12-014566	18DEC2012	JY	AC	
			L	UPDATE NICKEL PLATING THICKNESS	20JUN2017	JW	SH	

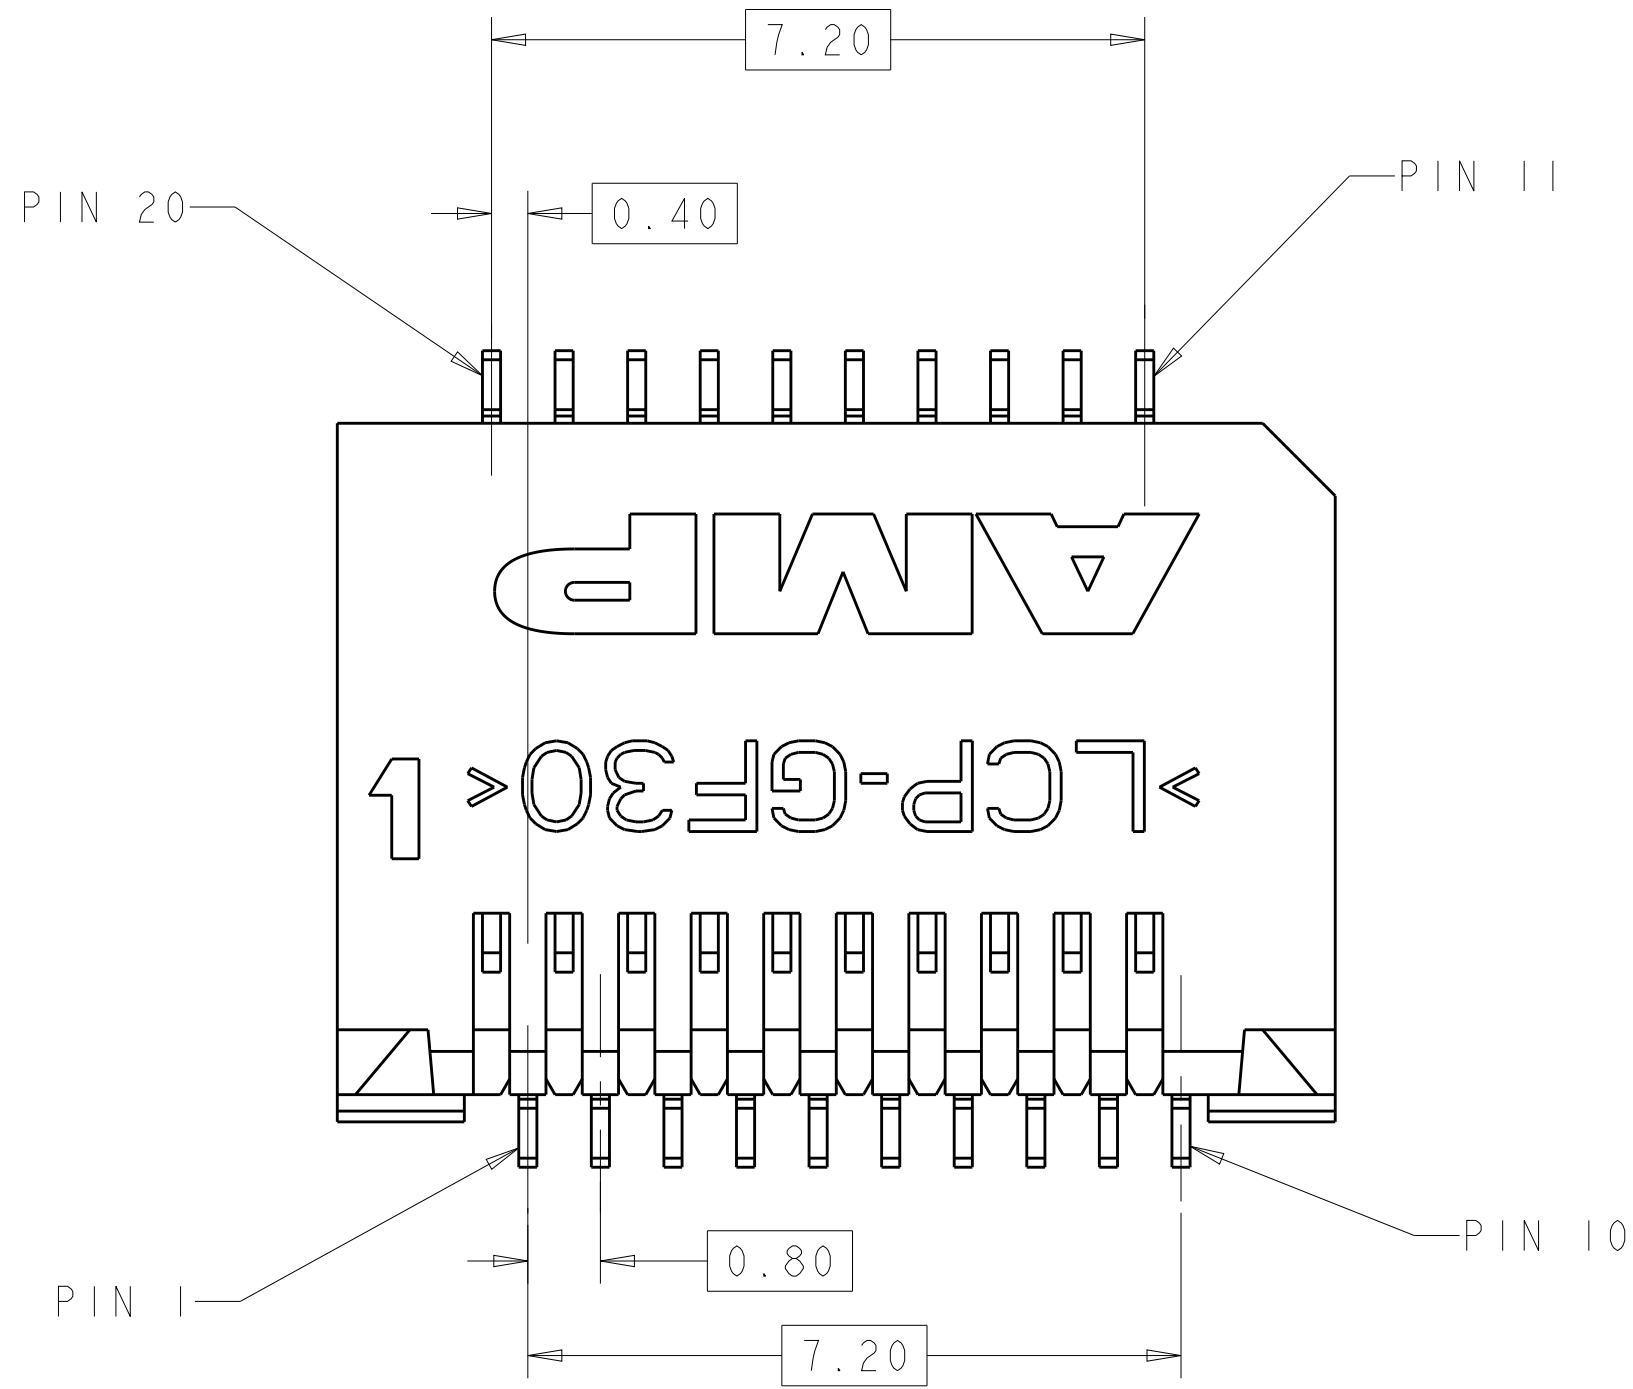

1. PART COMPATABLE WITH SFP MSA. REFER TO THE SFP MSA FOR DIMENSIONS NOT SHOWN ON THIS PRINT.


2. HOUSING: HIGH TEMPERATURE LCP, UL 94V-0 RATED, BLACK.
CONTACT: PHOSPHOR BRONZE.

3. CONTACTS: 0.00038 MIN GOLD IN CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA, OVER 0.00127 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.



4. PACKAGED 480 PIECES PER REEL.

5. DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER, SEE DRAWING 1367034 FOR LAYOUT WHEN USED WITH 1367034-1 BOTTOM CAGE (STANDARD SFP APPLICATION).


6. CONTACTS: 0.00076 MIN GOLD IN CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA, OVER 0.00127 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.

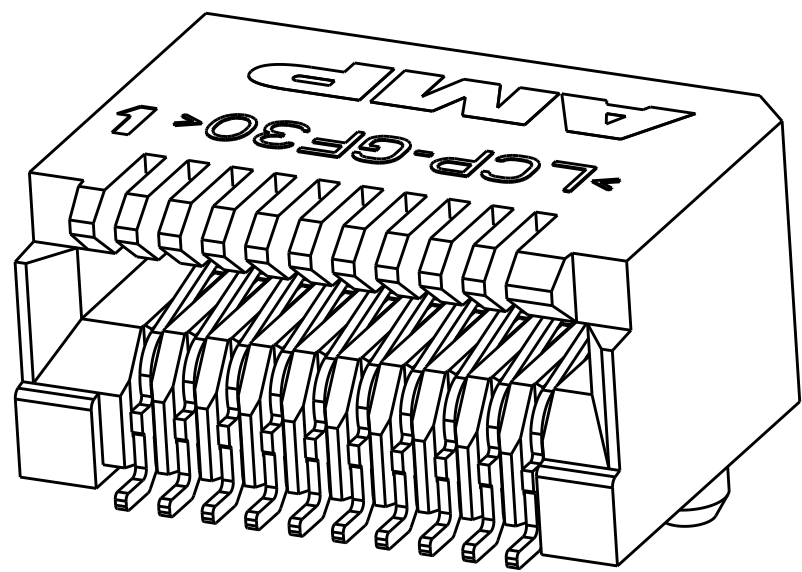

SCALE 8:1

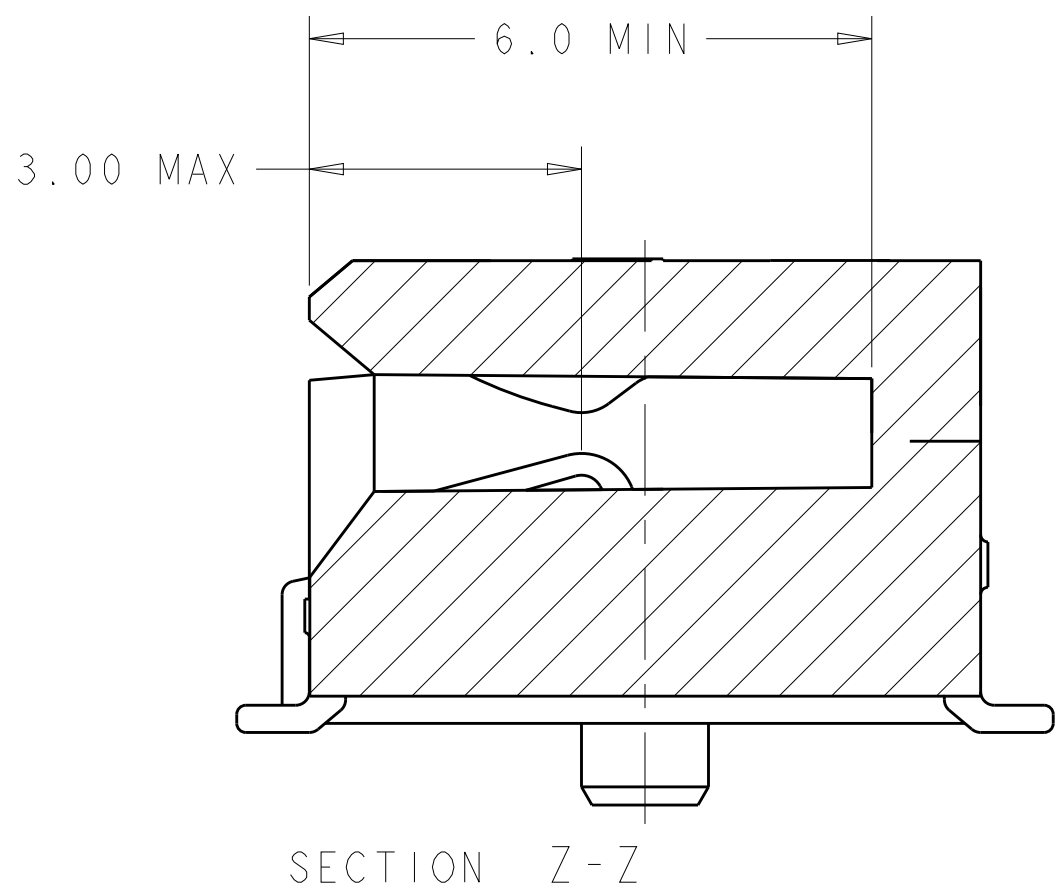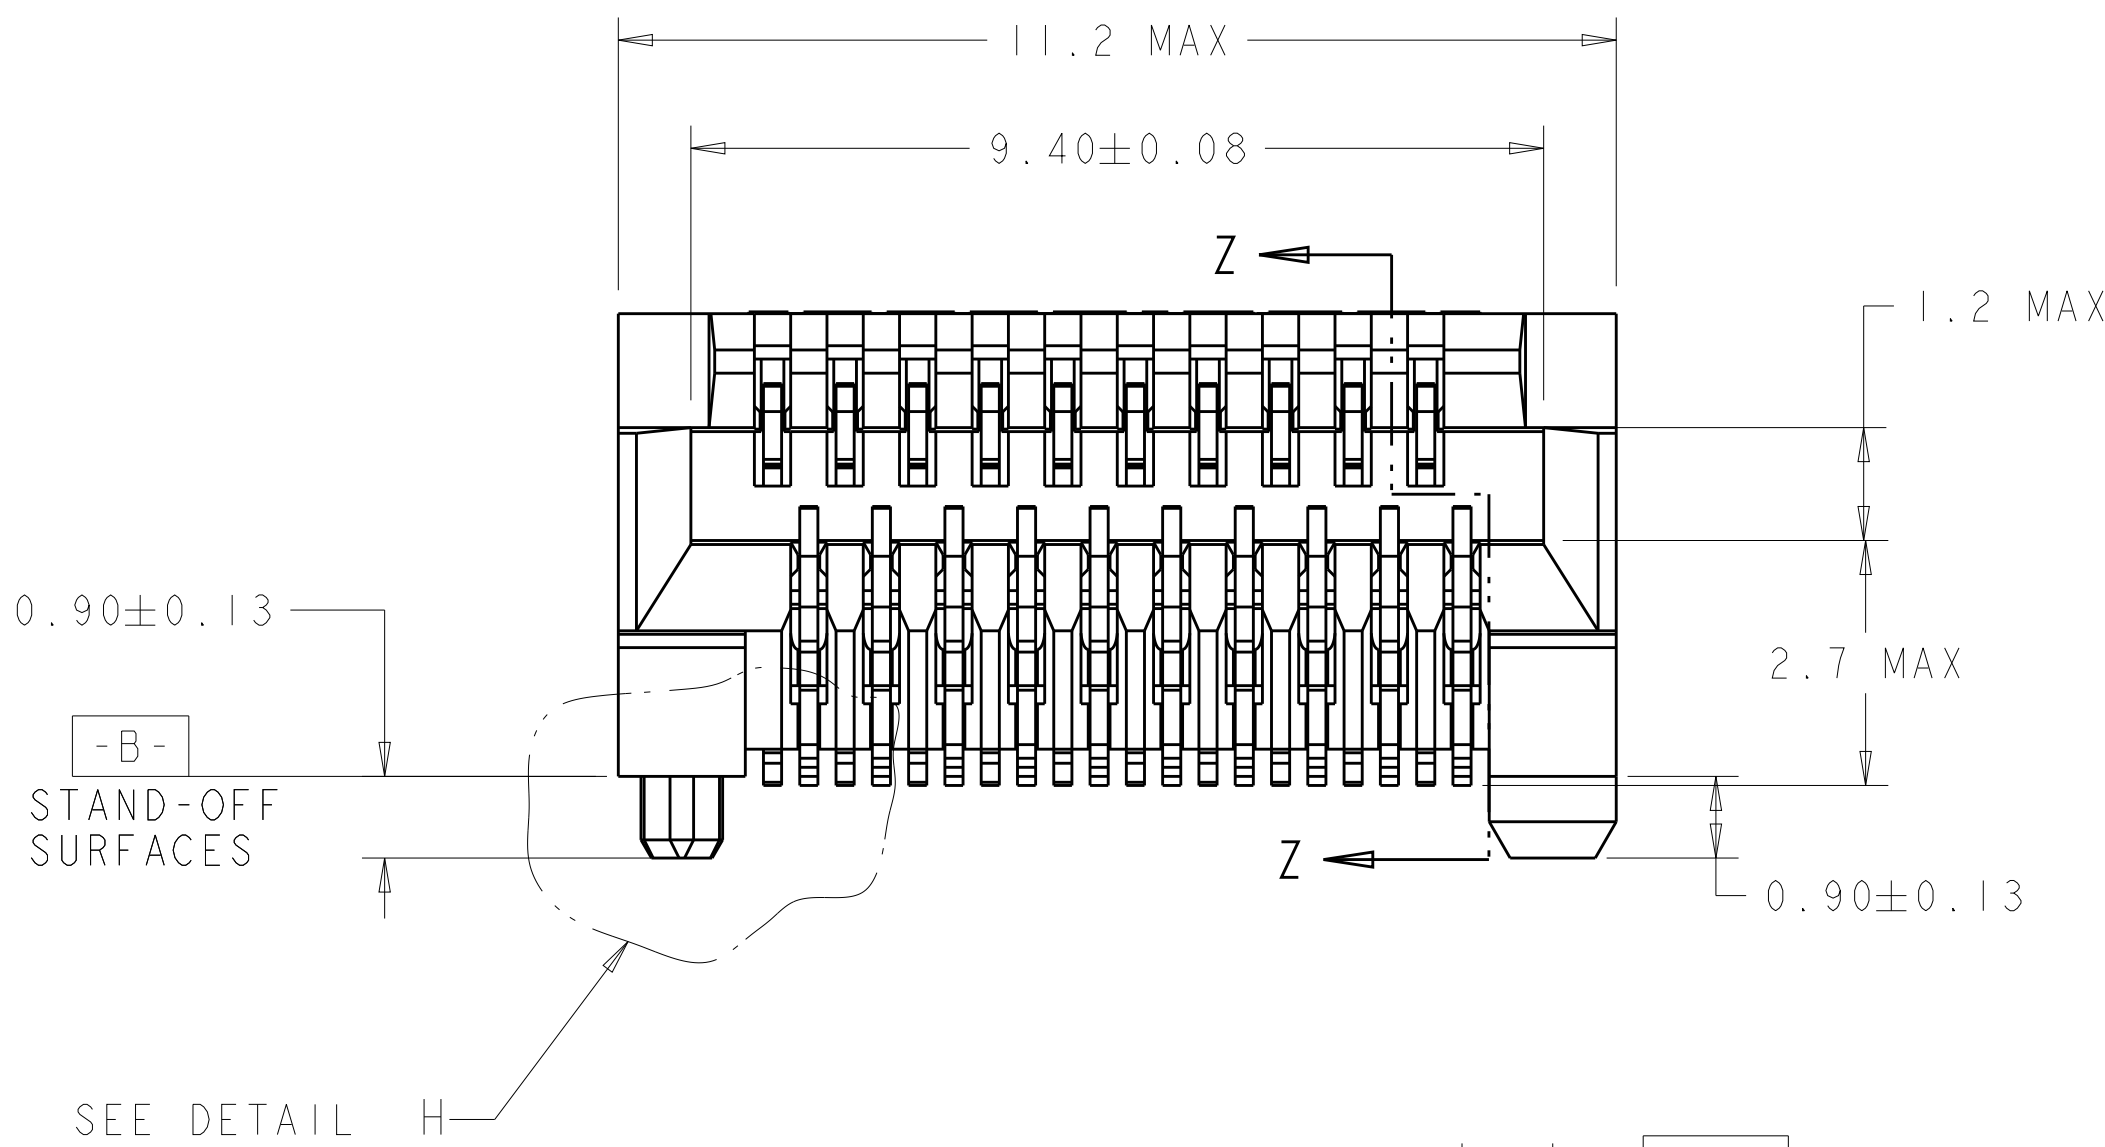


SECTION Z-Z

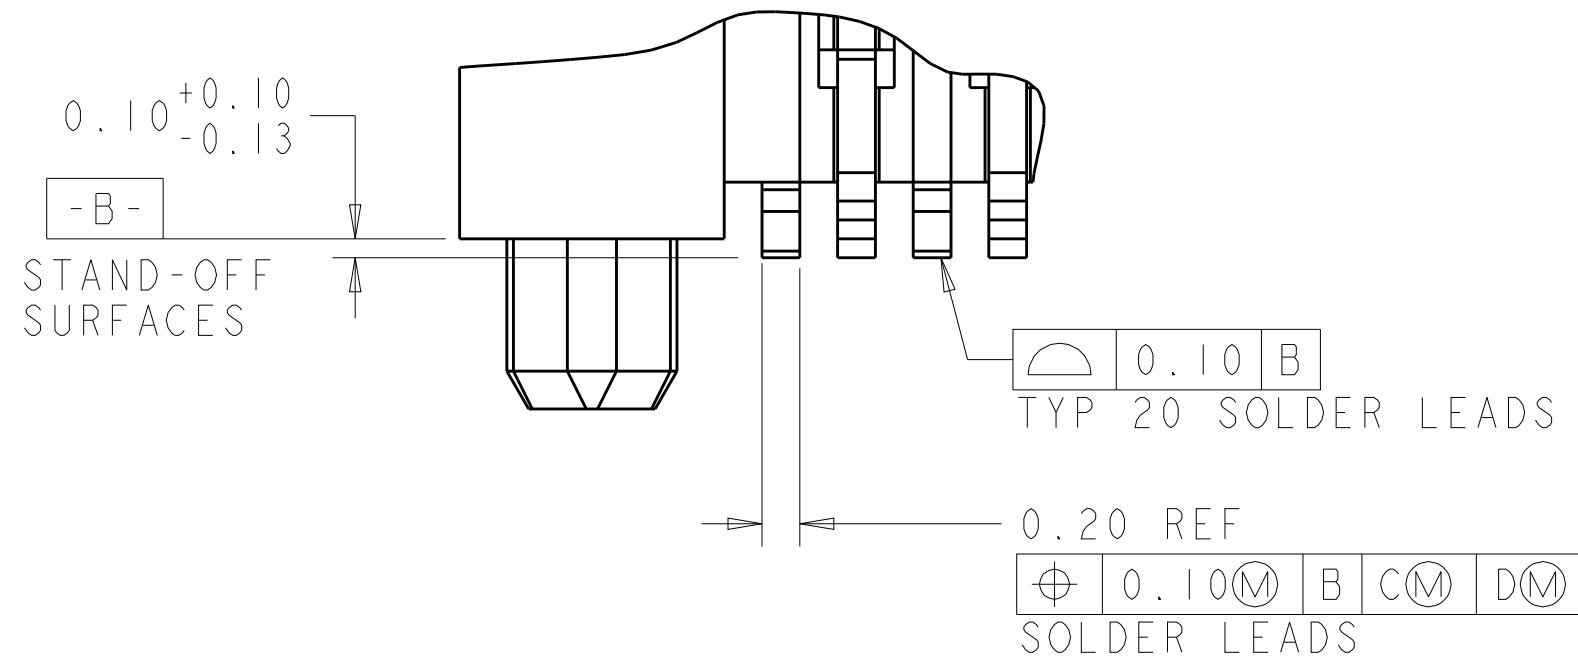

DETAIL H
SCALE 25:1

YES	6	1367073-4
YES	3	1367073-3
NO	6	1367073-2
NO	3	1367073-1
DATE CODE	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. KERLIN CHK E. BRIGHT APVD F. BRIGHT	01MAR2000 01MAR2000 01MAR2000	NAME PT CONNECTOR ASSEMBLY, 20 POSITION, SFP, RTANG, 0.8MM	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1949 APPLICATION SPEC 114-13017	
MATERIAL		FINISH		WEIGHT -	
SEE TABLE		Customer Drawing		SCALE 12:1 SHEET 1 OF 2 REV L	

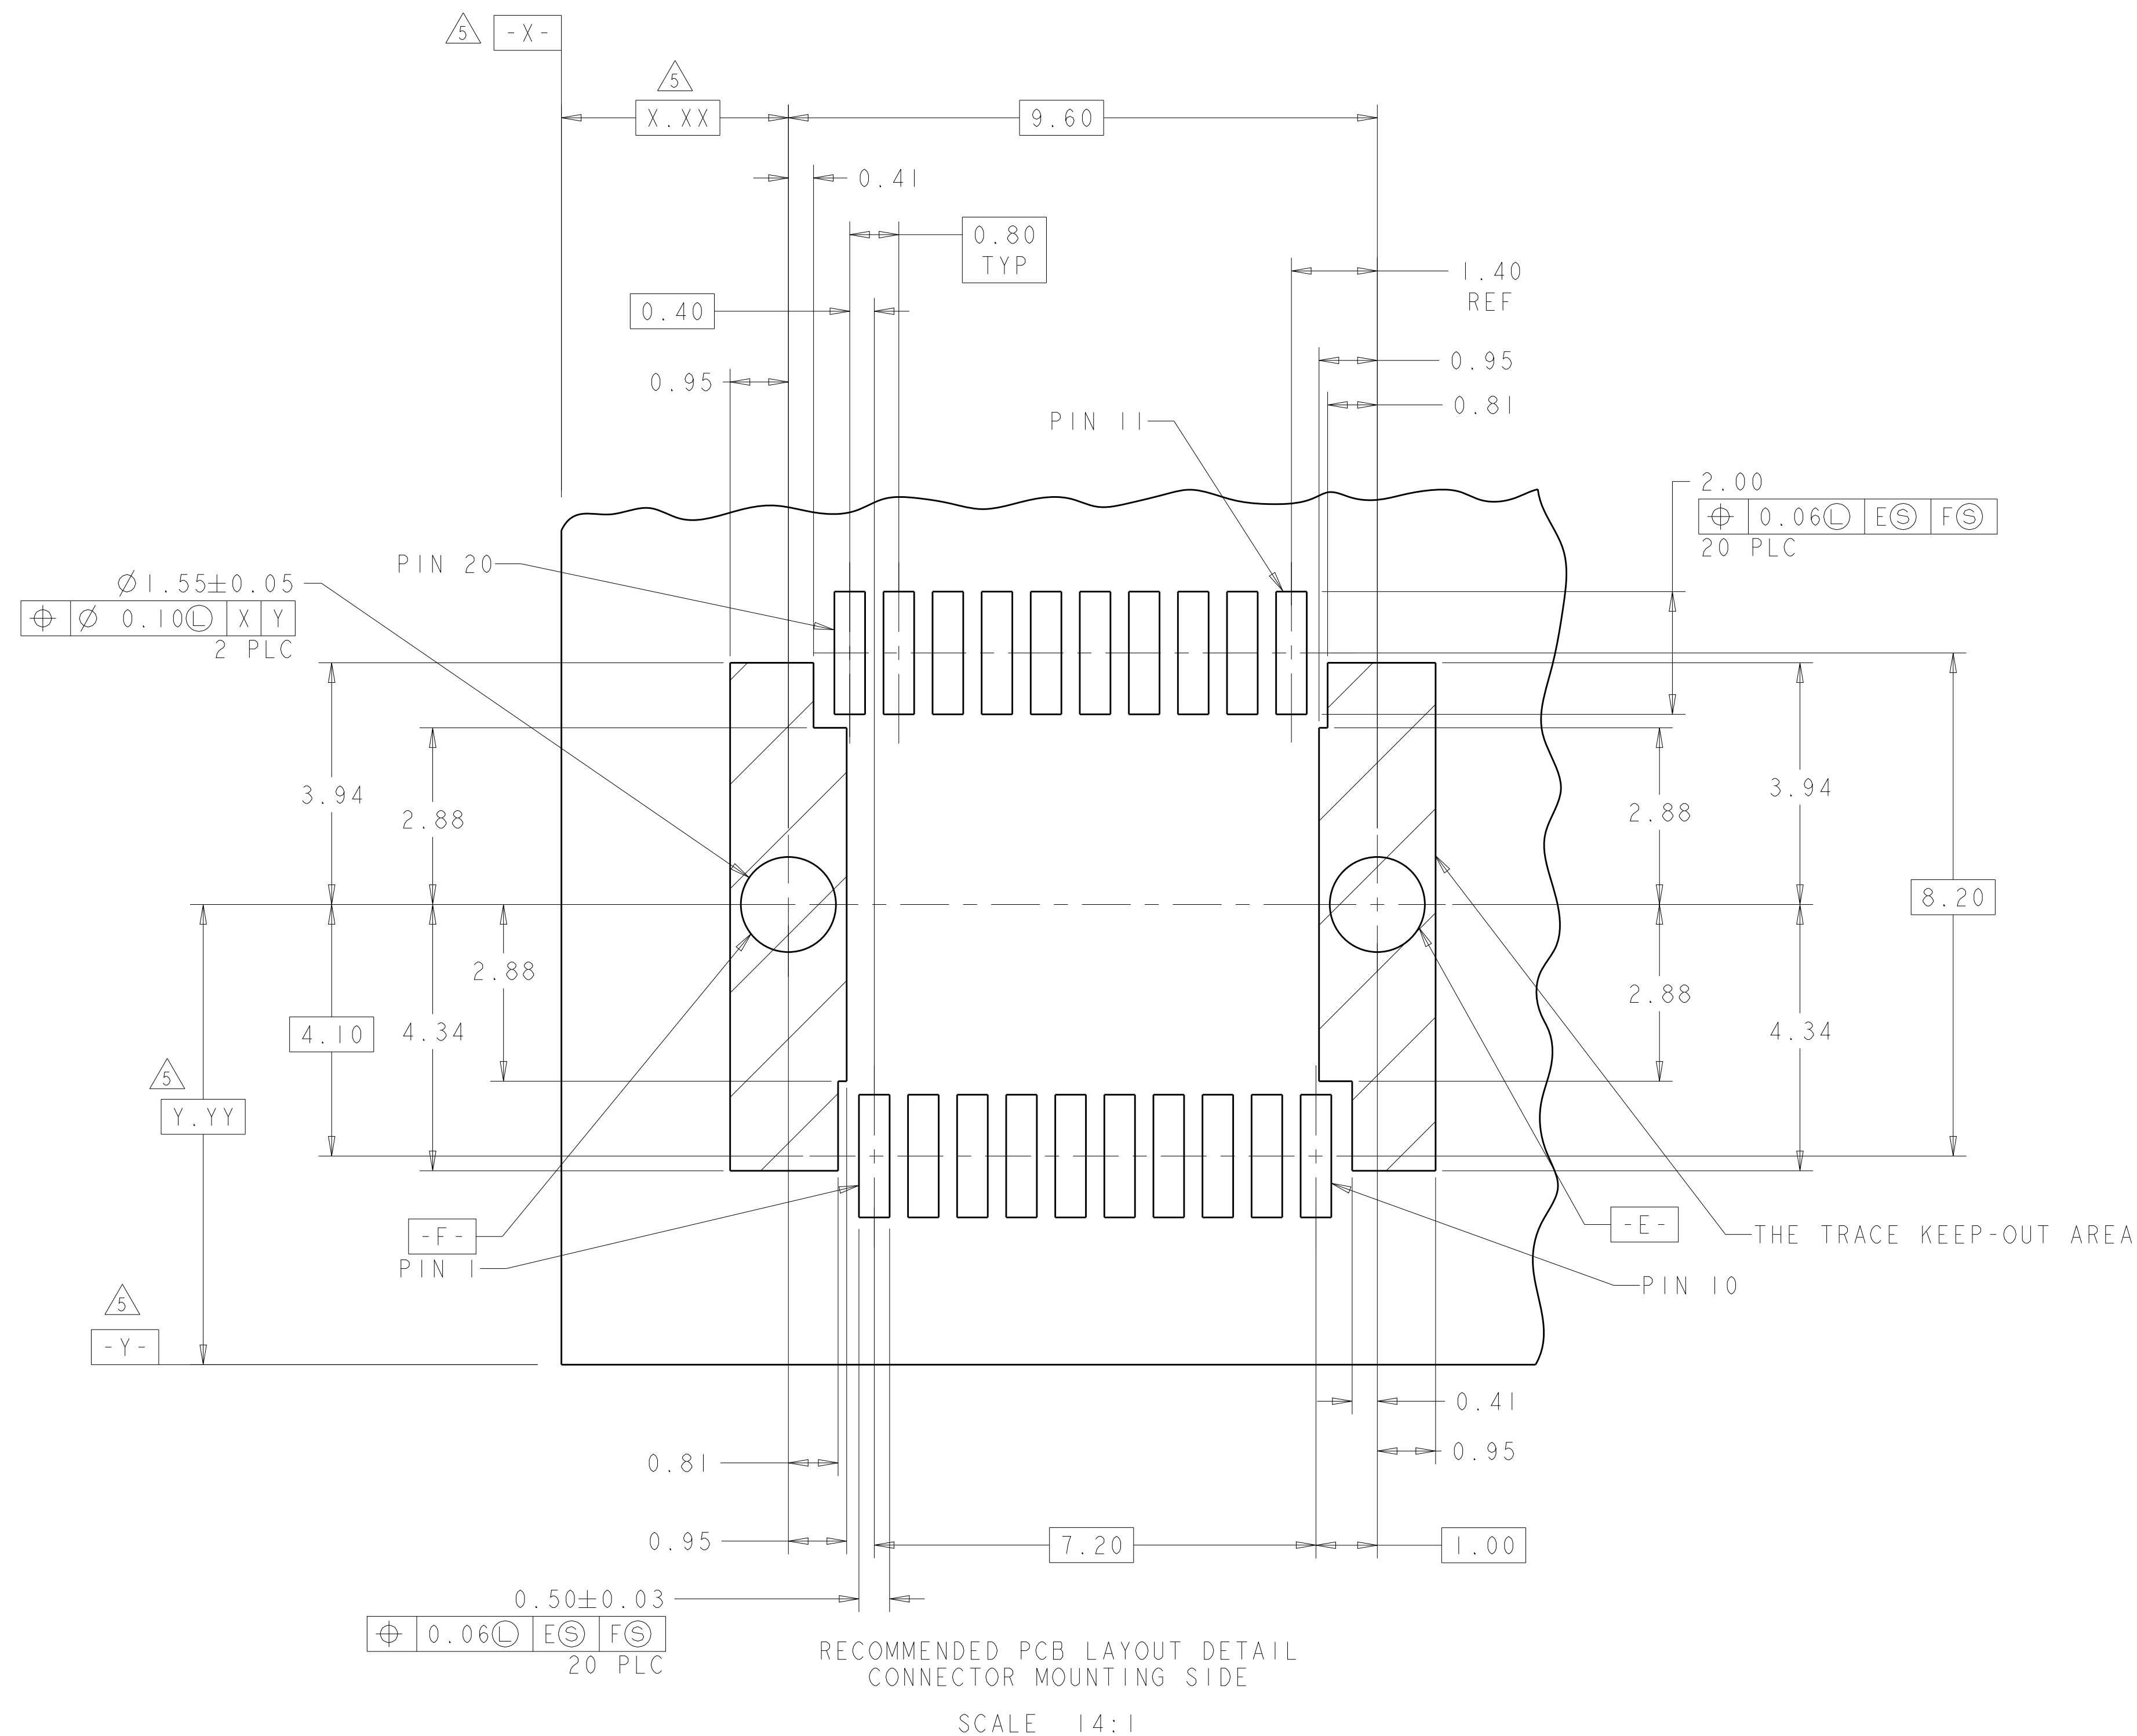

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1367073-3](#)