


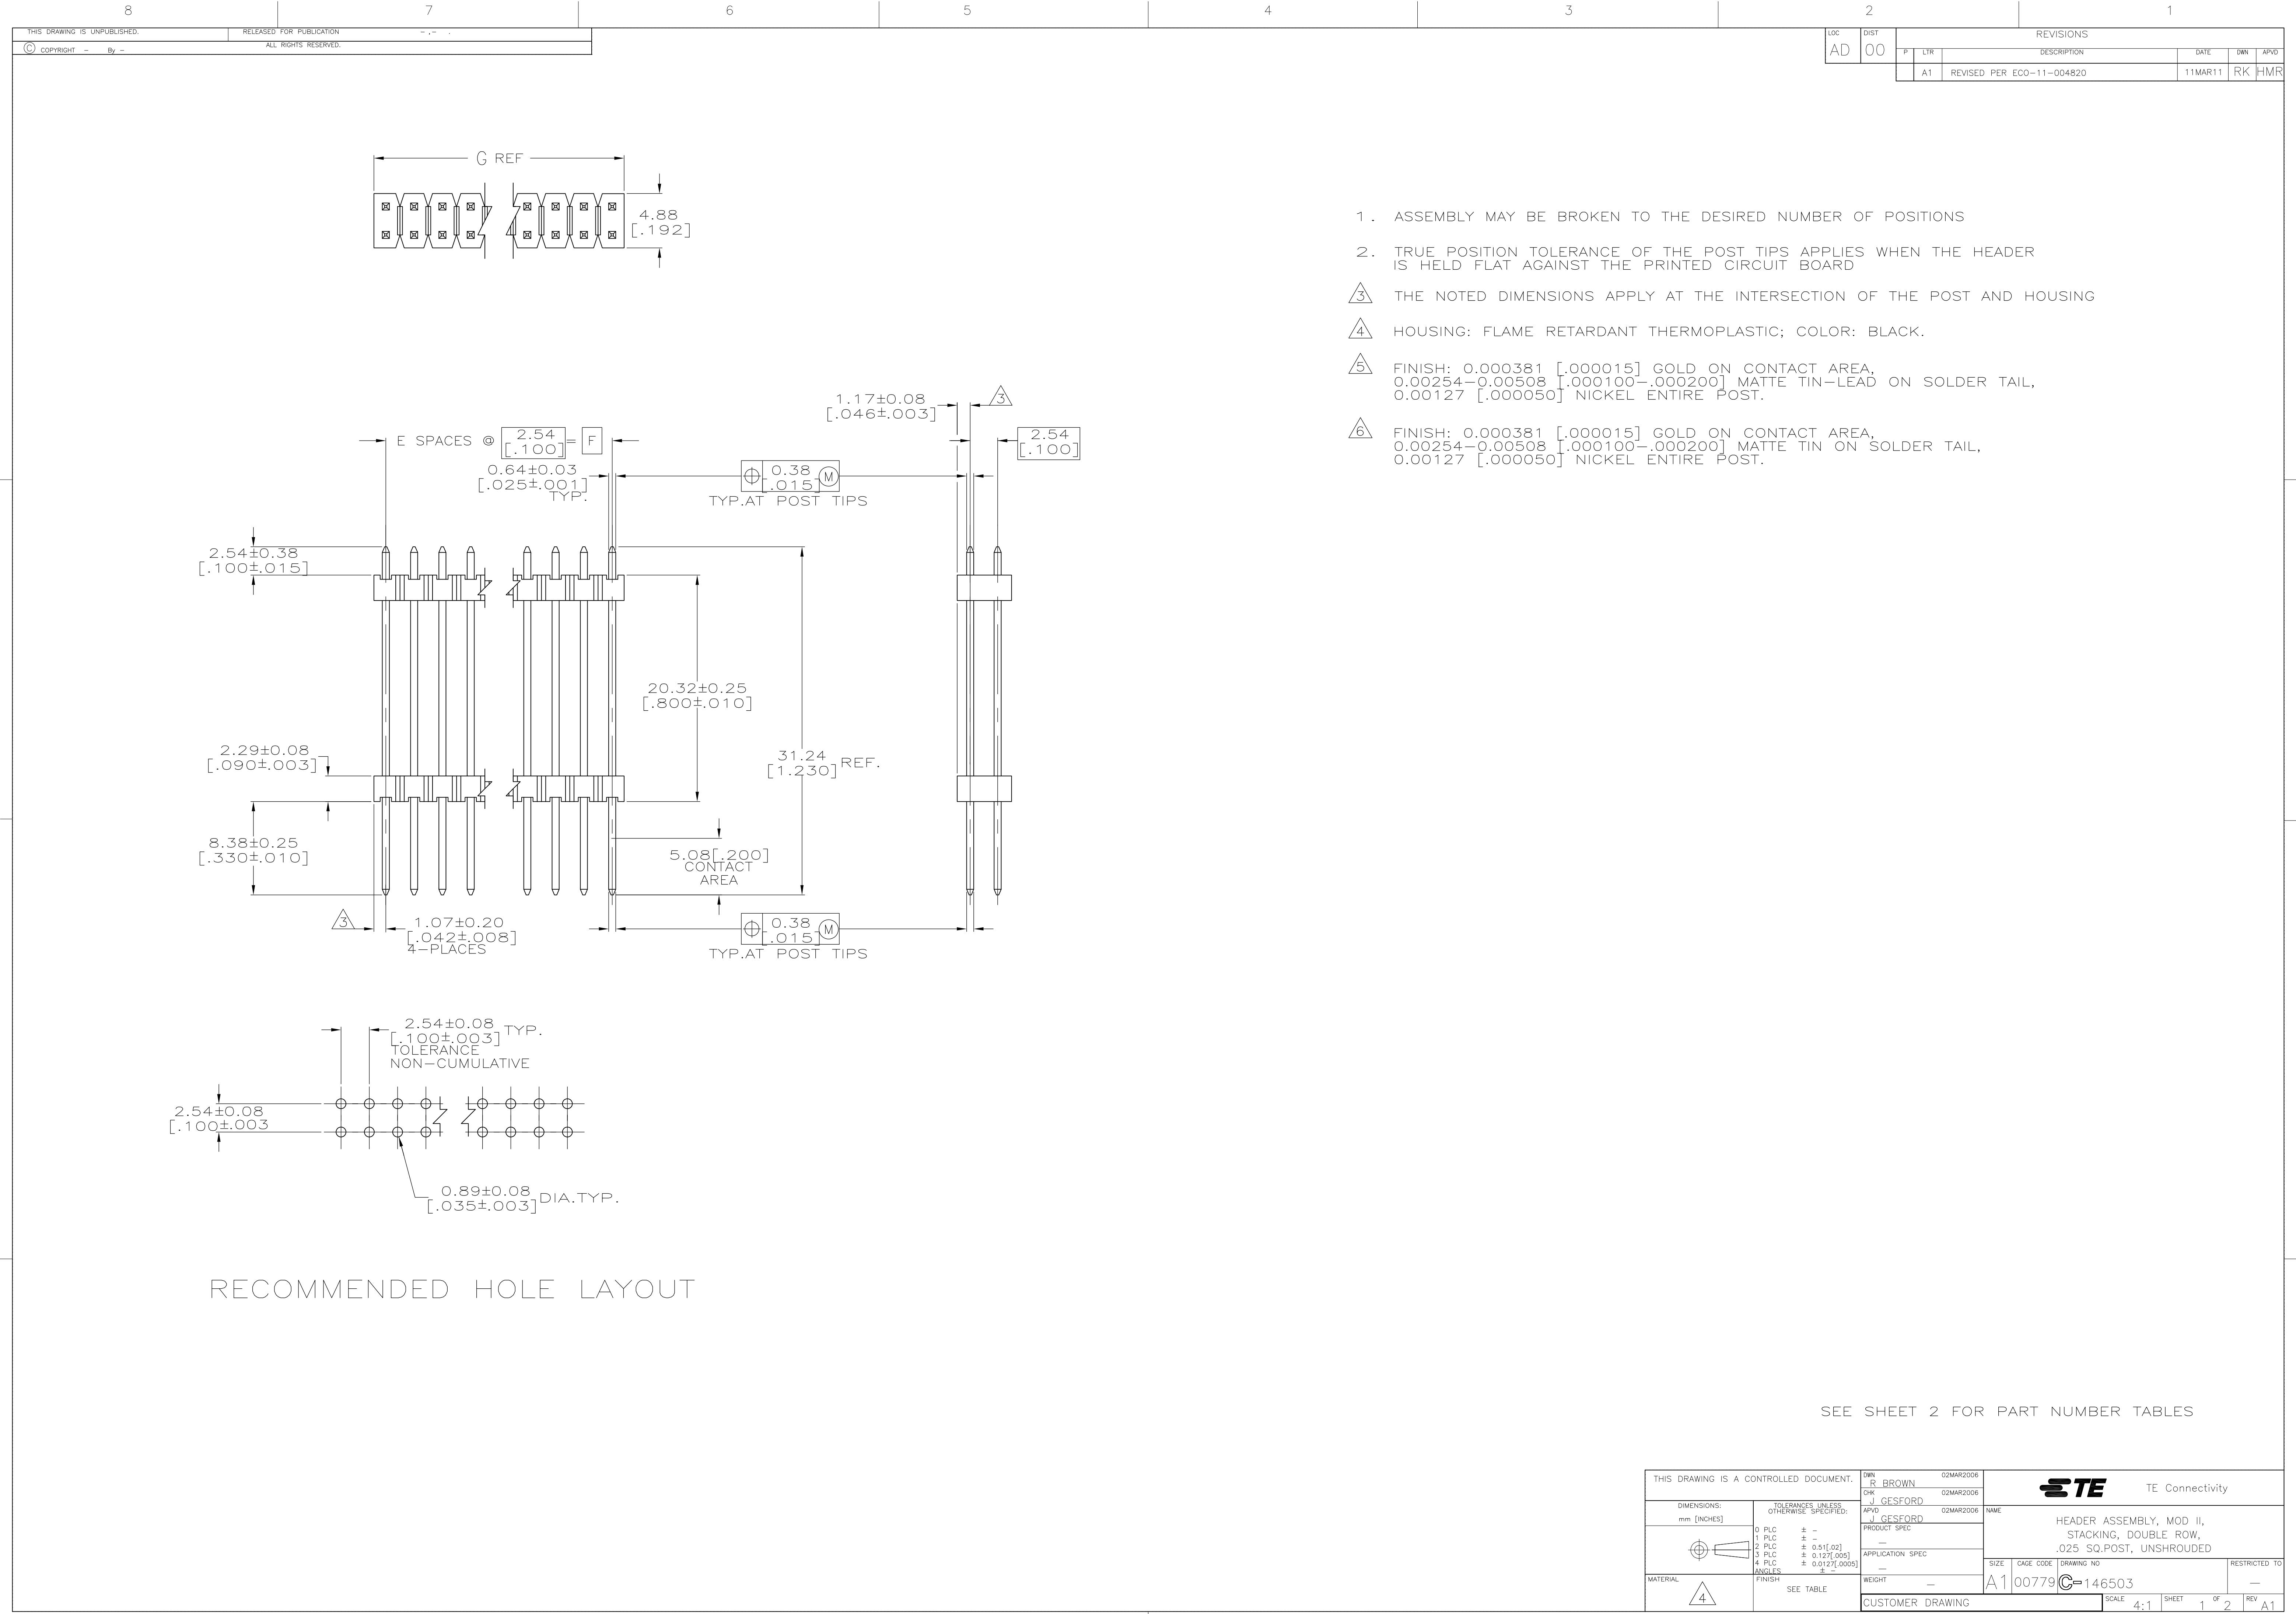

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.

RECOMMENDED HOLE LAYOUT

SEE SHEET 2 FOR PART NUMBER TABLES

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN	02MAR2006	 TE Connectivity						
		CHK J GESFORD	02MAR2006							
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J GESFORD	02MAR2006	NAME	HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED					
		PRODUCT SPEC								
	0. PLC ± - 1. PLC ± - 2. PLC ± 0.51[.02] 3. PLC ± 0.127[.005] 4. PLC ± 0.0127[.0005] ANGLES ± -	APPLICATION SPEC		SIZE	CAGE CODE DRAWING NO	RESTRICTED TO				
		—								
MATERIAL	FINISH SEE TABLE	WEIGHT		A1	00779	 146503	—			
		—								
CUSTOMER DRAWING		SCALE		4:1		SHEET	1 OF 2	REV	A1	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOCAD

DIST39

REVISONS

REV	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

6

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
	101.19 [3.984]	99.06 [3.900]	39	80	9-146503-0
	98.65 [3.884]	96.52 [3.800]	38	78	8-146503-9
	96.11 [3.784]	93.98 [3.700]	37	76	8-146503-8
	93.57 [3.684]	91.44 [3.600]	36	74	8-146503-7
	91.03 [3.584]	88.90 [3.500]	35	72	8-146503-6
	88.49 [3.484]	86.36 [3.400]	34	70	8-146503-5
	85.95 [3.384]	83.82 [3.300]	33	68	8-146503-4
	83.41 [3.284]	81.28 [3.200]	32	66	8-146503-3
	80.87 [3.184]	78.74 [3.100]	31	64	8-146503-2
	78.33 [3.084]	76.20 [3.000]	30	62	8-146503-1
	75.79 [2.984]	73.66 [2.900]	29	60	8-146503-0
	73.25 [2.884]	71.12 [2.800]	28	58	7-146503-9
	70.71 [2.784]	68.58 [2.700]	27	56	7-146503-8
	68.17 [2.684]	66.04 [2.600]	26	54	7-146503-7
	65.63 [2.584]	63.50 [2.500]	25	52	7-146503-6
	63.09 [2.484]	60.96 [2.400]	24	50	7-146503-5
	60.55 [2.384]	58.42 [2.300]	23	48	7-146503-4
	58.01 [2.284]	55.88 [2.200]	22	46	7-146503-3
	55.47 [2.184]	53.34 [2.100]	21	44	7-146503-2
	52.93 [2.084]	50.80 [2.000]	20	42	7-146503-1
	50.39 [1.984]	48.26 [1.900]	19	40	7-146503-0
	47.85 [1.884]	45.72 [1.800]	18	38	6-146503-9
	45.31 [1.784]	43.18 [1.700]	17	36	6-146503-8
	42.77 [1.684]	40.64 [1.600]	16	34	6-146503-7
	40.23 [1.584]	38.10 [1.500]	15	32	6-146503-6
	37.69 [1.484]	35.56 [1.400]	14	30	6-146503-5
	35.15 [1.384]	33.02 [1.300]	13	28	6-146503-4
	32.61 [1.284]	30.48 [1.200]	12	26	6-146503-3
	30.07 [1.184]	27.94 [1.100]	11	24	6-146503-2
	27.53 [1.084]	25.40 [1.000]	10	22	6-146503-1
	24.99 [.984]	22.86 [.900]	9	20	6-146503-0
	22.45 [.884]	20.32 [.800]	8	18	5-146503-9
	19.91 [.784]	17.78 [.700]	7	16	5-146503-8
	17.37 [.684]	15.24 [.600]	6	14	5-146503-7
	14.83 [.584]	12.70 [.500]	5	12	5-146503-6
	12.29 [.484]	10.16 [.400]	4	10	5-146503-5
	9.75 [.384]	7.62 [.300]	3	8	5-146503-4
	7.21 [.284]	5.08 [.200]	2	6	5-146503-3
	4.67 [.184]	2.54 [.100]	1	4	5-146503-2
	2.13 [.084]	— —	—	2	5-146503-1

5

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
	101.19 [3.984]	99.06 [3.900]	39	80	4-146503-0
	98.65 [3.884]	96.52 [3.800]	38	78	3-146503-9
	96.11 [3.784]	93.98 [3.700]	37	76	3-146503-8
	93.57 [3.684]	91.44 [3.600]	36	74	3-146503-7
	91.03 [3.584]	88.90 [3.500]	35	72	3-146503-6
	88.49 [3.484]	86.36 [3.400]	34	70	3-146503-5
	85.95 [3.384]	83.82 [3.300]	33	68	3-146503-4
	83.41 [3.284]	81.28 [3.200]	32	66	3-146503-3
	80.87 [3.184]	78.74 [3.100]	31	64	3-146503-2
	78.33 [3.084]	76.20 [3.000]	30	62	3-146503-1
	75.79 [2.984]	73.66 [2.900]	29	60	3-146503-0
	73.25 [2.884]	71.12 [2.800]	28	58	2-146503-9
	70.71 [2.784]	68.58 [2.700]	27	56	2-146503-8
	68.17 [2.684]	66.04 [2.600]	26	54	2-146503-7
	65.63 [2.584]	63.50 [2.500]	25	52	2-146503-6
	63.09 [2.484]	60.96 [2.400]	24	50	2-146503-5
	60.55 [2.384]	58.42 [2.300]	23	48	2-146503-4
	58.01 [2.284]	55.88 [2.200]	22	46	2-146503-3
	55.47 [2.184]	53.34 [2.100]	21	44	2-146503-2
	52.93 [2.084]	50.80 [2.000]	20	42	2-146503-1
	50.39 [1.984]	48.26 [1.900]	19	40	2-146503-0
	47.85 [1.884]	45.72 [1.800]	18	38	1-146503-9
	45.31 [1.784]	43.18 [1.700]	17	36	1-146503-8
	42.77 [1.684]	40.64 [1.600]	16	34	1-146503-7
	40.23 [1.584]	38.10 [1.500]	15	32	1-146503-6
	37.69 [1.484]	35.56 [1.400]	14	30	1-146503-5
	35.15 [1.384]	33.02 [1.300]	13	28	1-146503-4
	32.61 [1.284]	30.48 [1.200]	12	26	1-146503-3
	30.07 [1.184]	27.94 [1.100]	11	24	1-146503-2
	27.53 [1.084]	25.40 [1.000]	10	22	1-146503-1
	24.99 [.984]	22.86 [.900]	9	20	1-146503-0
	22.45 [.884]	20.32 [.800]	8	18	146503-9
	19.91 [.784]	17.78 [.700]	7	16	146503-8
	17.37 [.684]	15.24 [.600]	6	14	146503-7
	14.83 [.584]	12.70 [.500]	5	12	146503-6
	12.29 [.484]	10.16 [.400]	4	10	146503-5
	9.75 [.384]	7.62 [.300]	3	8	146503-4
	7.21 [.284]	5.08 [.200]	2	6	146503-3
	4.67 [.184]	2.54 [.100]	1	4	146503-2
	2.13 [.084]	— —	—	2	146503-1

4805 (3/11)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL

4

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —

1 PLC ± —

2 PLC ± 0.51[.02]

3 PLC ± 0.127[.005]

4 PLC ± 0.0127[.0005]

ANGLES ± —

FINISH 5

DWN E. BRANDBERG 11-NOV-96

CHK G. DUBNICZKI 11-NOV-96

APVD G. DUBNICZKI 11-NOV-96

PRODUCT SPEC

APPLICATION SPEC

WEIGHT —

CUSTOMER DRAWING

TE Connectivity

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

100779

146503

SCALE 4:1

SHEET 2 OF 2

REV A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-146503-5](#)