



TSM-116-02-S-DV-LC





(2.54 mm) .100"

.025" SQ POST HEADER

Board Mates:

SSW, SSQ, SSM, BSW, ESW, ESQ, BCS, SLW, CES, HLE

Cable Mates:

IDSS, IDSD

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TSM

Insulator Material:

Black Liquid Crystal Polymer Terminal Material: Phosphor Bronze

Phosphor Bronze
Plating:
Au or Sn over
50 μ" (1.27 μm) Ni
Operating Temp Range:
-55 °C to +105 °C with Tin;
-55 °C to +125 °C with Gold
Voltage Rating:
475 VAC -SV/-DV mated with
BCS or SSM
RoHS Compliant: Yes

nons compliant. les		
MATES	CURRENT RATING (PER PIN)	ì
TSM/SSW	4.7 A	
TSM/SSM	5.4 A	
TSM/HLE	4.1 A	
2 PINS POWERED		

PROCESSING

Lead-Free Solderable: Yes Lead-Free Solderable: Yes -DH/-SH Lead Coplanarity: (0.15 mm) .006" max (02-36)* -DV/-SV Lead Coplanarity: (0.10 mm) .004" max (02-05) (0.13 mm) .005" max (06-10)* (0.15 mm) .006" max (11-36)* *(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality




ALSO AVAILABLE (MOQ Required)

- Edge Mount and Locking Clips for -SV
- Solder Locks for -DH and Shrouds for -DV
- · Other platings

Some lengths, styles and options are non-standard, non-returnable.

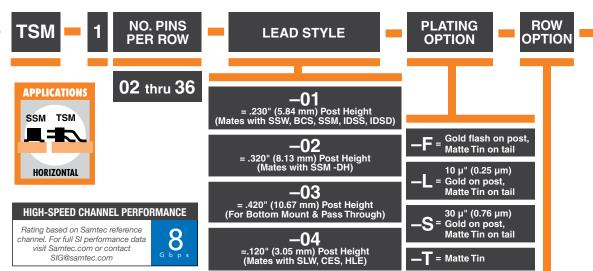

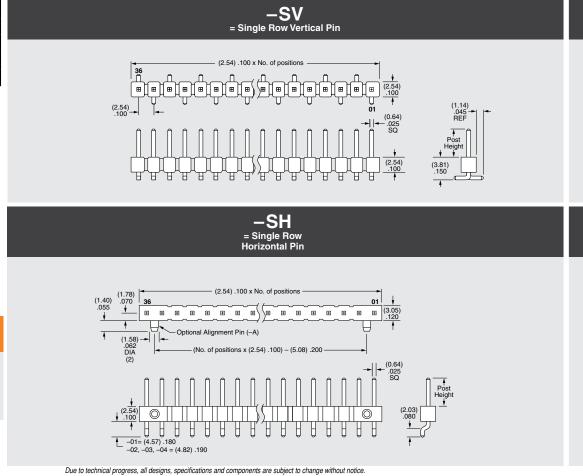





TSM SERIES

OTHER OPTIONS

$-\mathsf{A}$

= Alignment Pin metal or plastic at Samtec discretion (Not available with -TM or -MT) (02 positions min.) (Not available with -LC)

-LC

= Locking Clip (Not available with -TM) (3 positions min.) (Not available with -A) (Manual placement required)

–K

= (6.50 mm) .256" DIA Polyimide Film Pick & Place Pad

(-SH: 4 positions minimum without -TR; 2 & 3 positions available with -TR)

(-DH: 4 positions minimum without -TR)

-"XXX"

= Polarized Position


-P

= Plastic Pick & Place Pad (-DV: 4 positions minimum without -TR; 2 & 3 positions available with -TR)

(-SH: 4 positions minimum without -TR; 2 & 3 positions available with -TR)

(-DH:5 positions minimum without -TR)

(-SV: 4 positions minimum without -TR; 2 & 3 positions available with -TR)



-(6.35) - (13.27) -(50) - (50) -(50) + (50) -(50) + (50) -(50) + (50) -(50) + (50) -(50) + (50) -(50) + (50) -(50) + (50) -(50) + (50) -(50) + (50) -(50) -(50) + (50) -

-TR


= Tape & Reel Packaging –SV: 02-22 positions, –DV:02-28 positions, -SH: 02-30 positions, –DH: 02-29 positions (Not available with –MT or –TM)

_FR

= Full Reel Tape & Reel
(must order maximum quantity per reel;
contact Samtec for quantity breaks)
-SV: 02-22 positions, -DV:02-28 positions,
-SH: 02-30 positions, -DH: 02-29 positions
(Not available with -MT or -TM)

-DV


= Double Row Vertical Pin

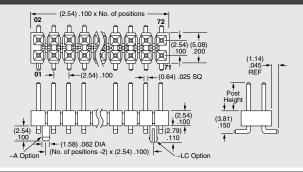


MT—

= Triple Row Vertical Mixed Technology (Style -01 only)


02 thru 30 positions only






–DH

= Double Row Horizontal Pin (Style -01, -02 or -03 only)

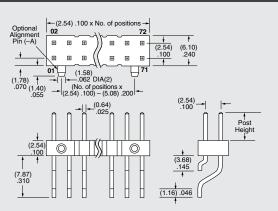

- MT = Mixed Technology Pin (Style -01, -02 or -03 only)

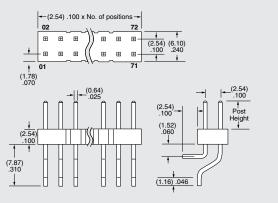

Due to technical progress, all designs, specifications and components are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

TSM-132-01-L-DV-A