
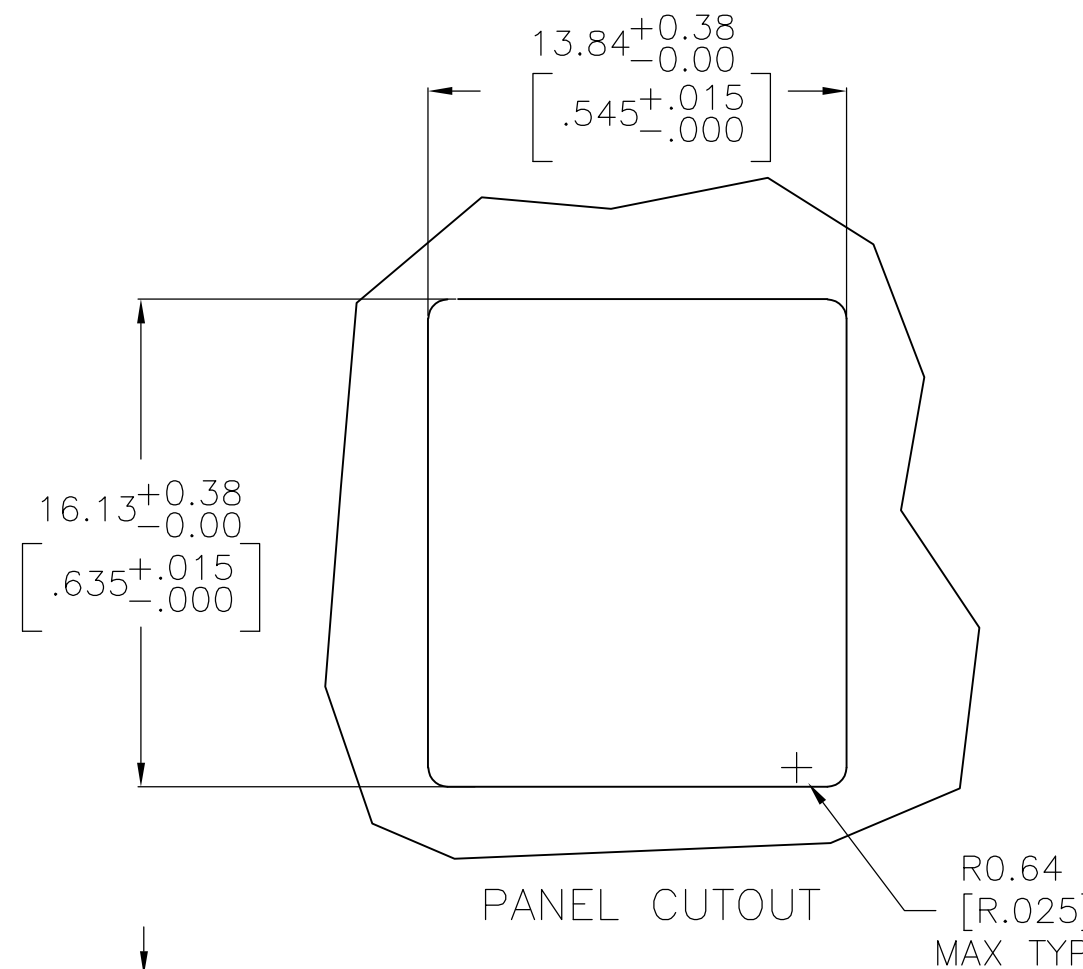
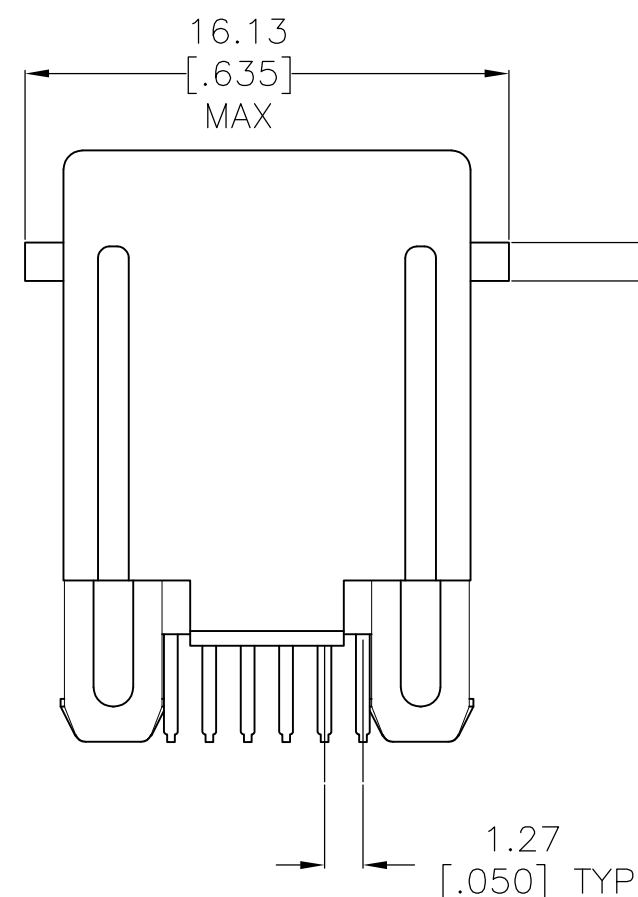
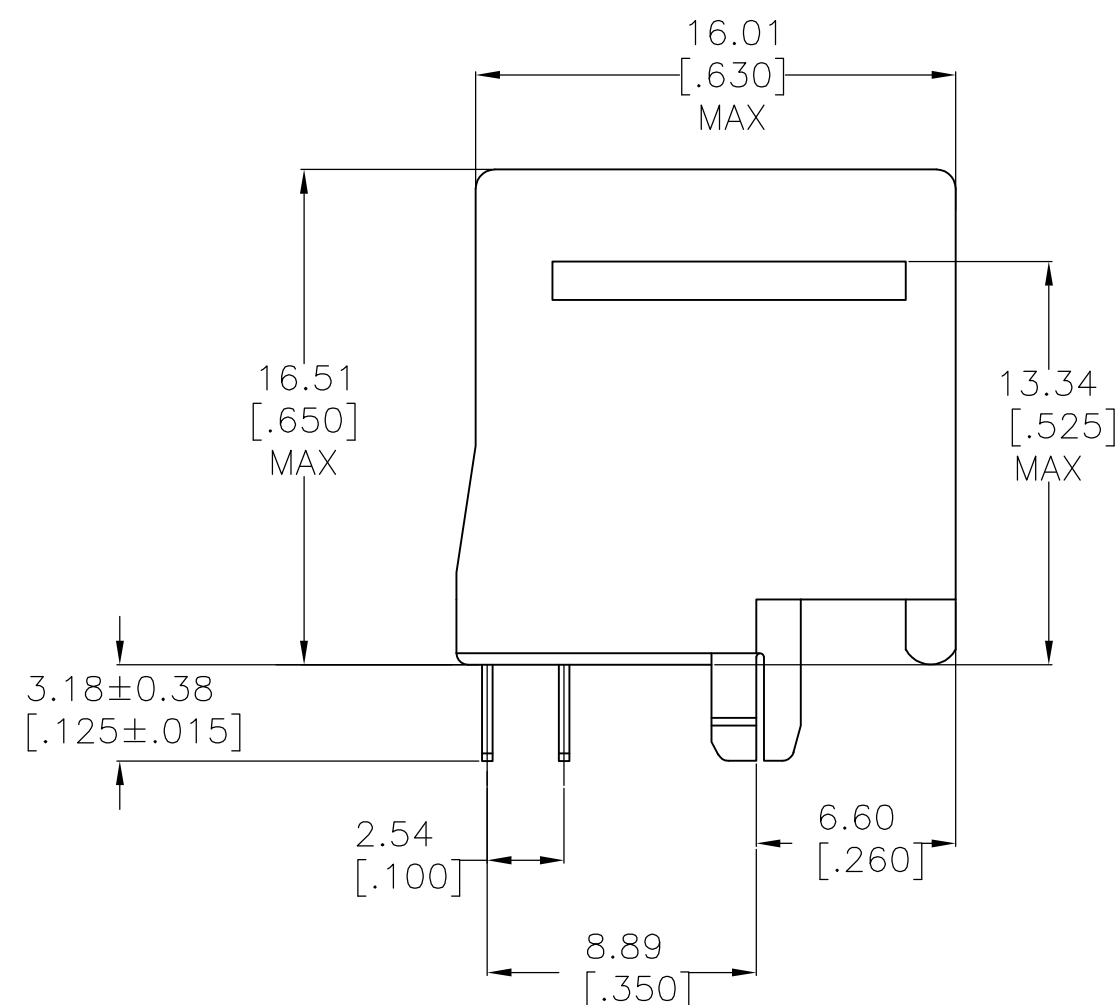


LOC	DIST	REVISIONS					
AA	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED PER ECO-11-005033	23MAR11	RK	HMR


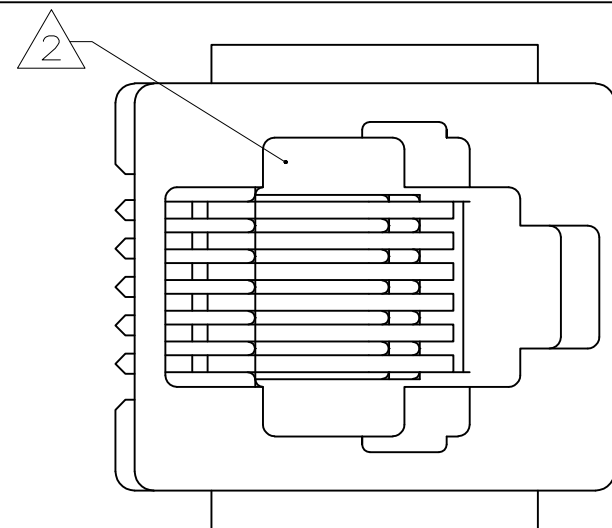


1. MATERIAL: HOUSING - BLACK PBT POLYESTER,
BLACK, UL 94V-O.
TERMINAL - 0.36 [0.14] THICK PHOS-BRONZE
PLATED WITH 1.27 μ m [0.00050] MINIMUM THICK GOLD
IN LOCALIZED AREA AND 3.81 μ m [0.00150] MINIMUM
THICK MATTE TIN IN SOLDER AREA OVER 1.27 μ m
[0.00050] MINIMUM THICK NICKEL UNDERPLATE.

△ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68 AND REA BULLETIN 345-81, PE-76 SPECIFICATION FOR MODULAR TELEPHONE HARDWARE.

 BULK PACKAGE IN A TRAY


4 PACKAGED 28 PIECES PER TUBE

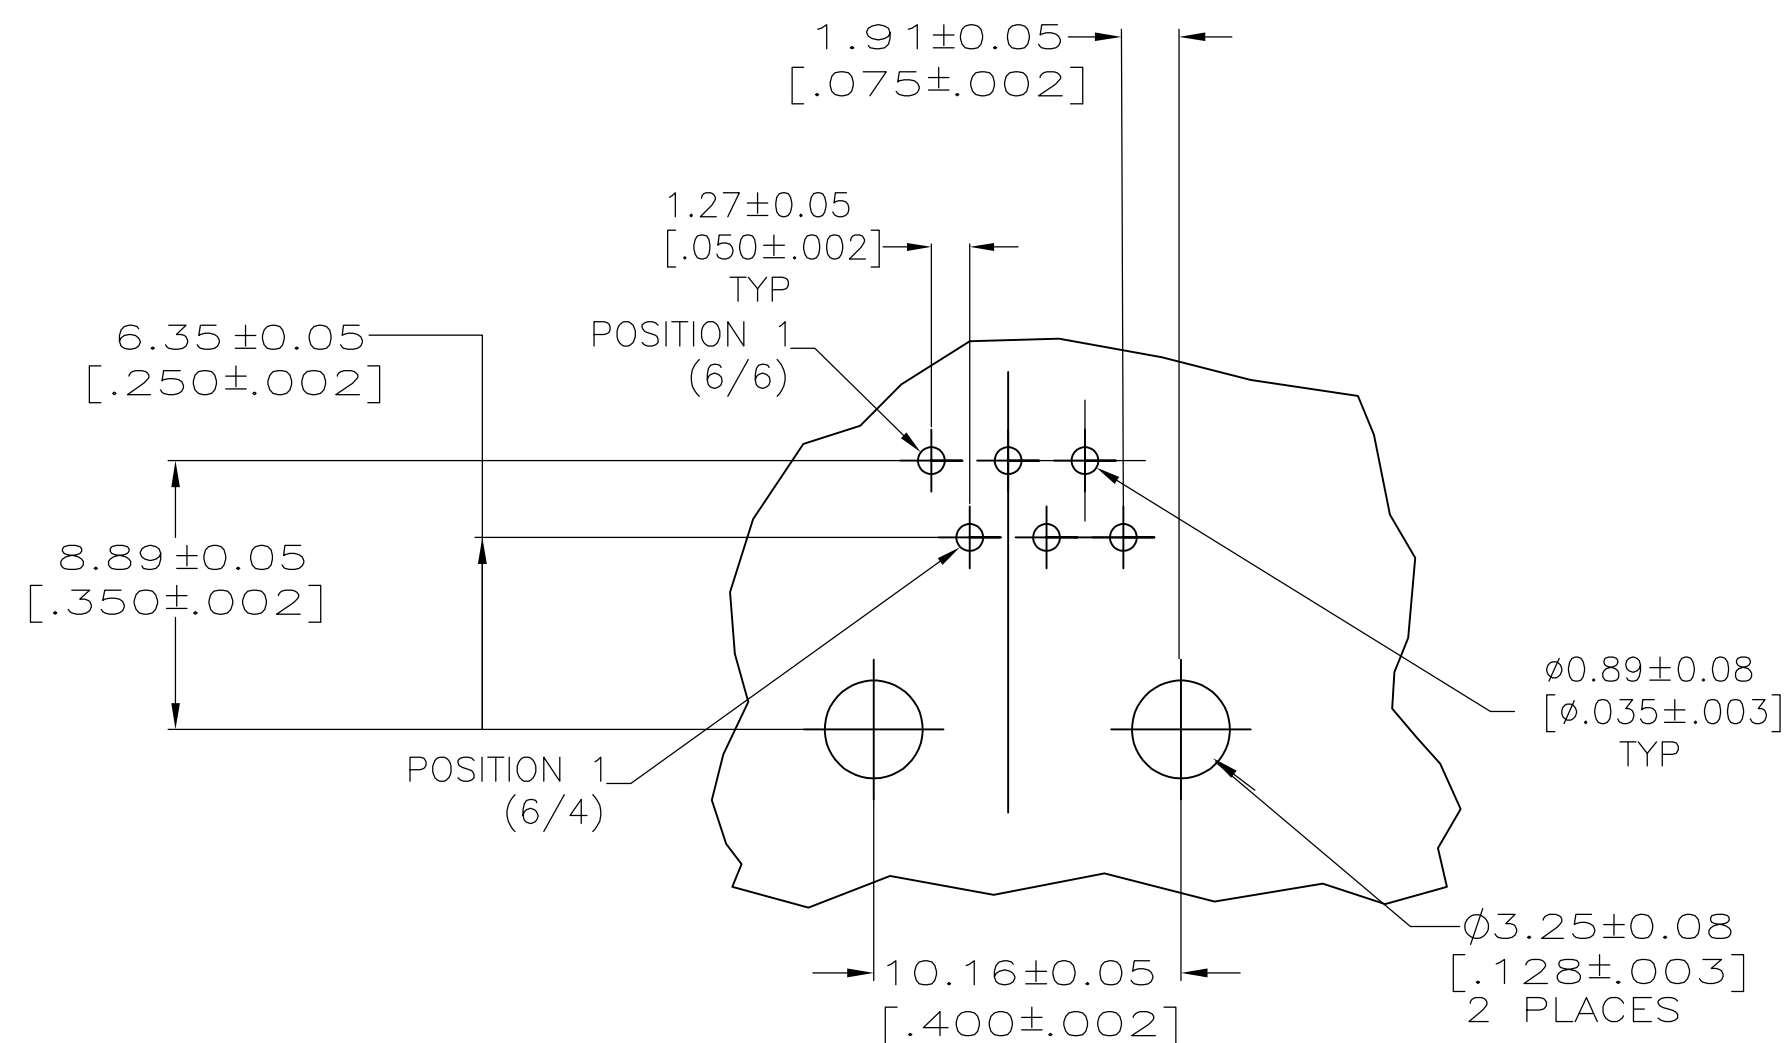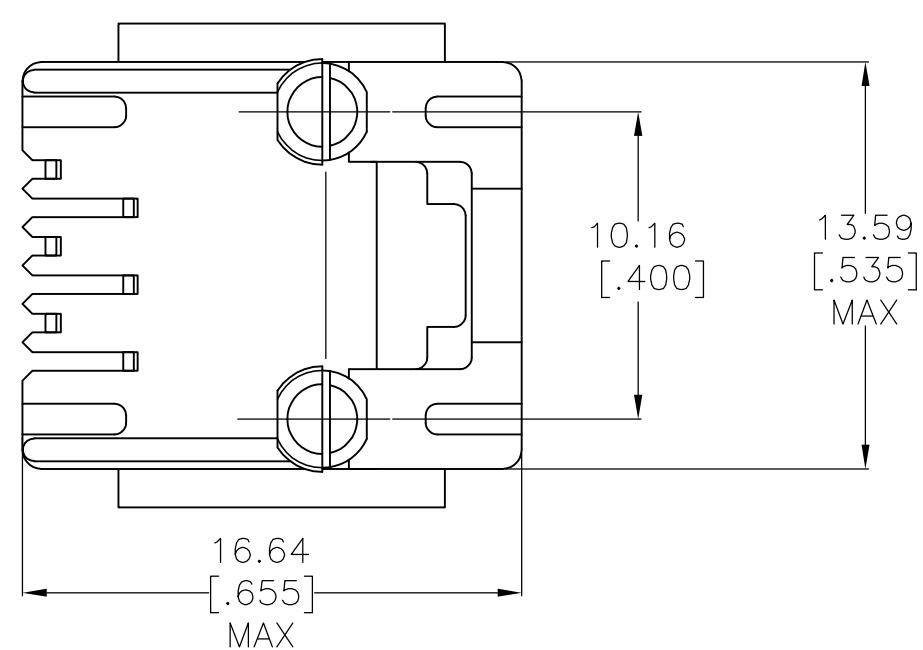

SUGGESTED PC BOARD LAYOUT

COMPONENT SIDE

	6	5520258-4
	6	5520258-3
	4	5520258-2
PACKAGED	CONTACTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.A.MAYER 16AUG2007		 TE Connectivity	
		CHK P.RECCE 16AUG2007			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		APVD S. FLICKINGER 16AUG2007		MODULAR JACK ASSEMBLY, TOP ENTRY, 6 POSITION, FLANGELESS, WITH PANEL STOPS	
		PRODUCT SPEC 108-1163			
		APPLICATION SPEC 114-2048			
		SIZE A2			
MATERIAL SEE NOTE 1		FINISH SEE NOTE 1		SCALE 4:1	
		WEIGHT —		SHEET 1 OF 1	
		CUSTOMER DRAWING		REV R1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5520258-4](#)