


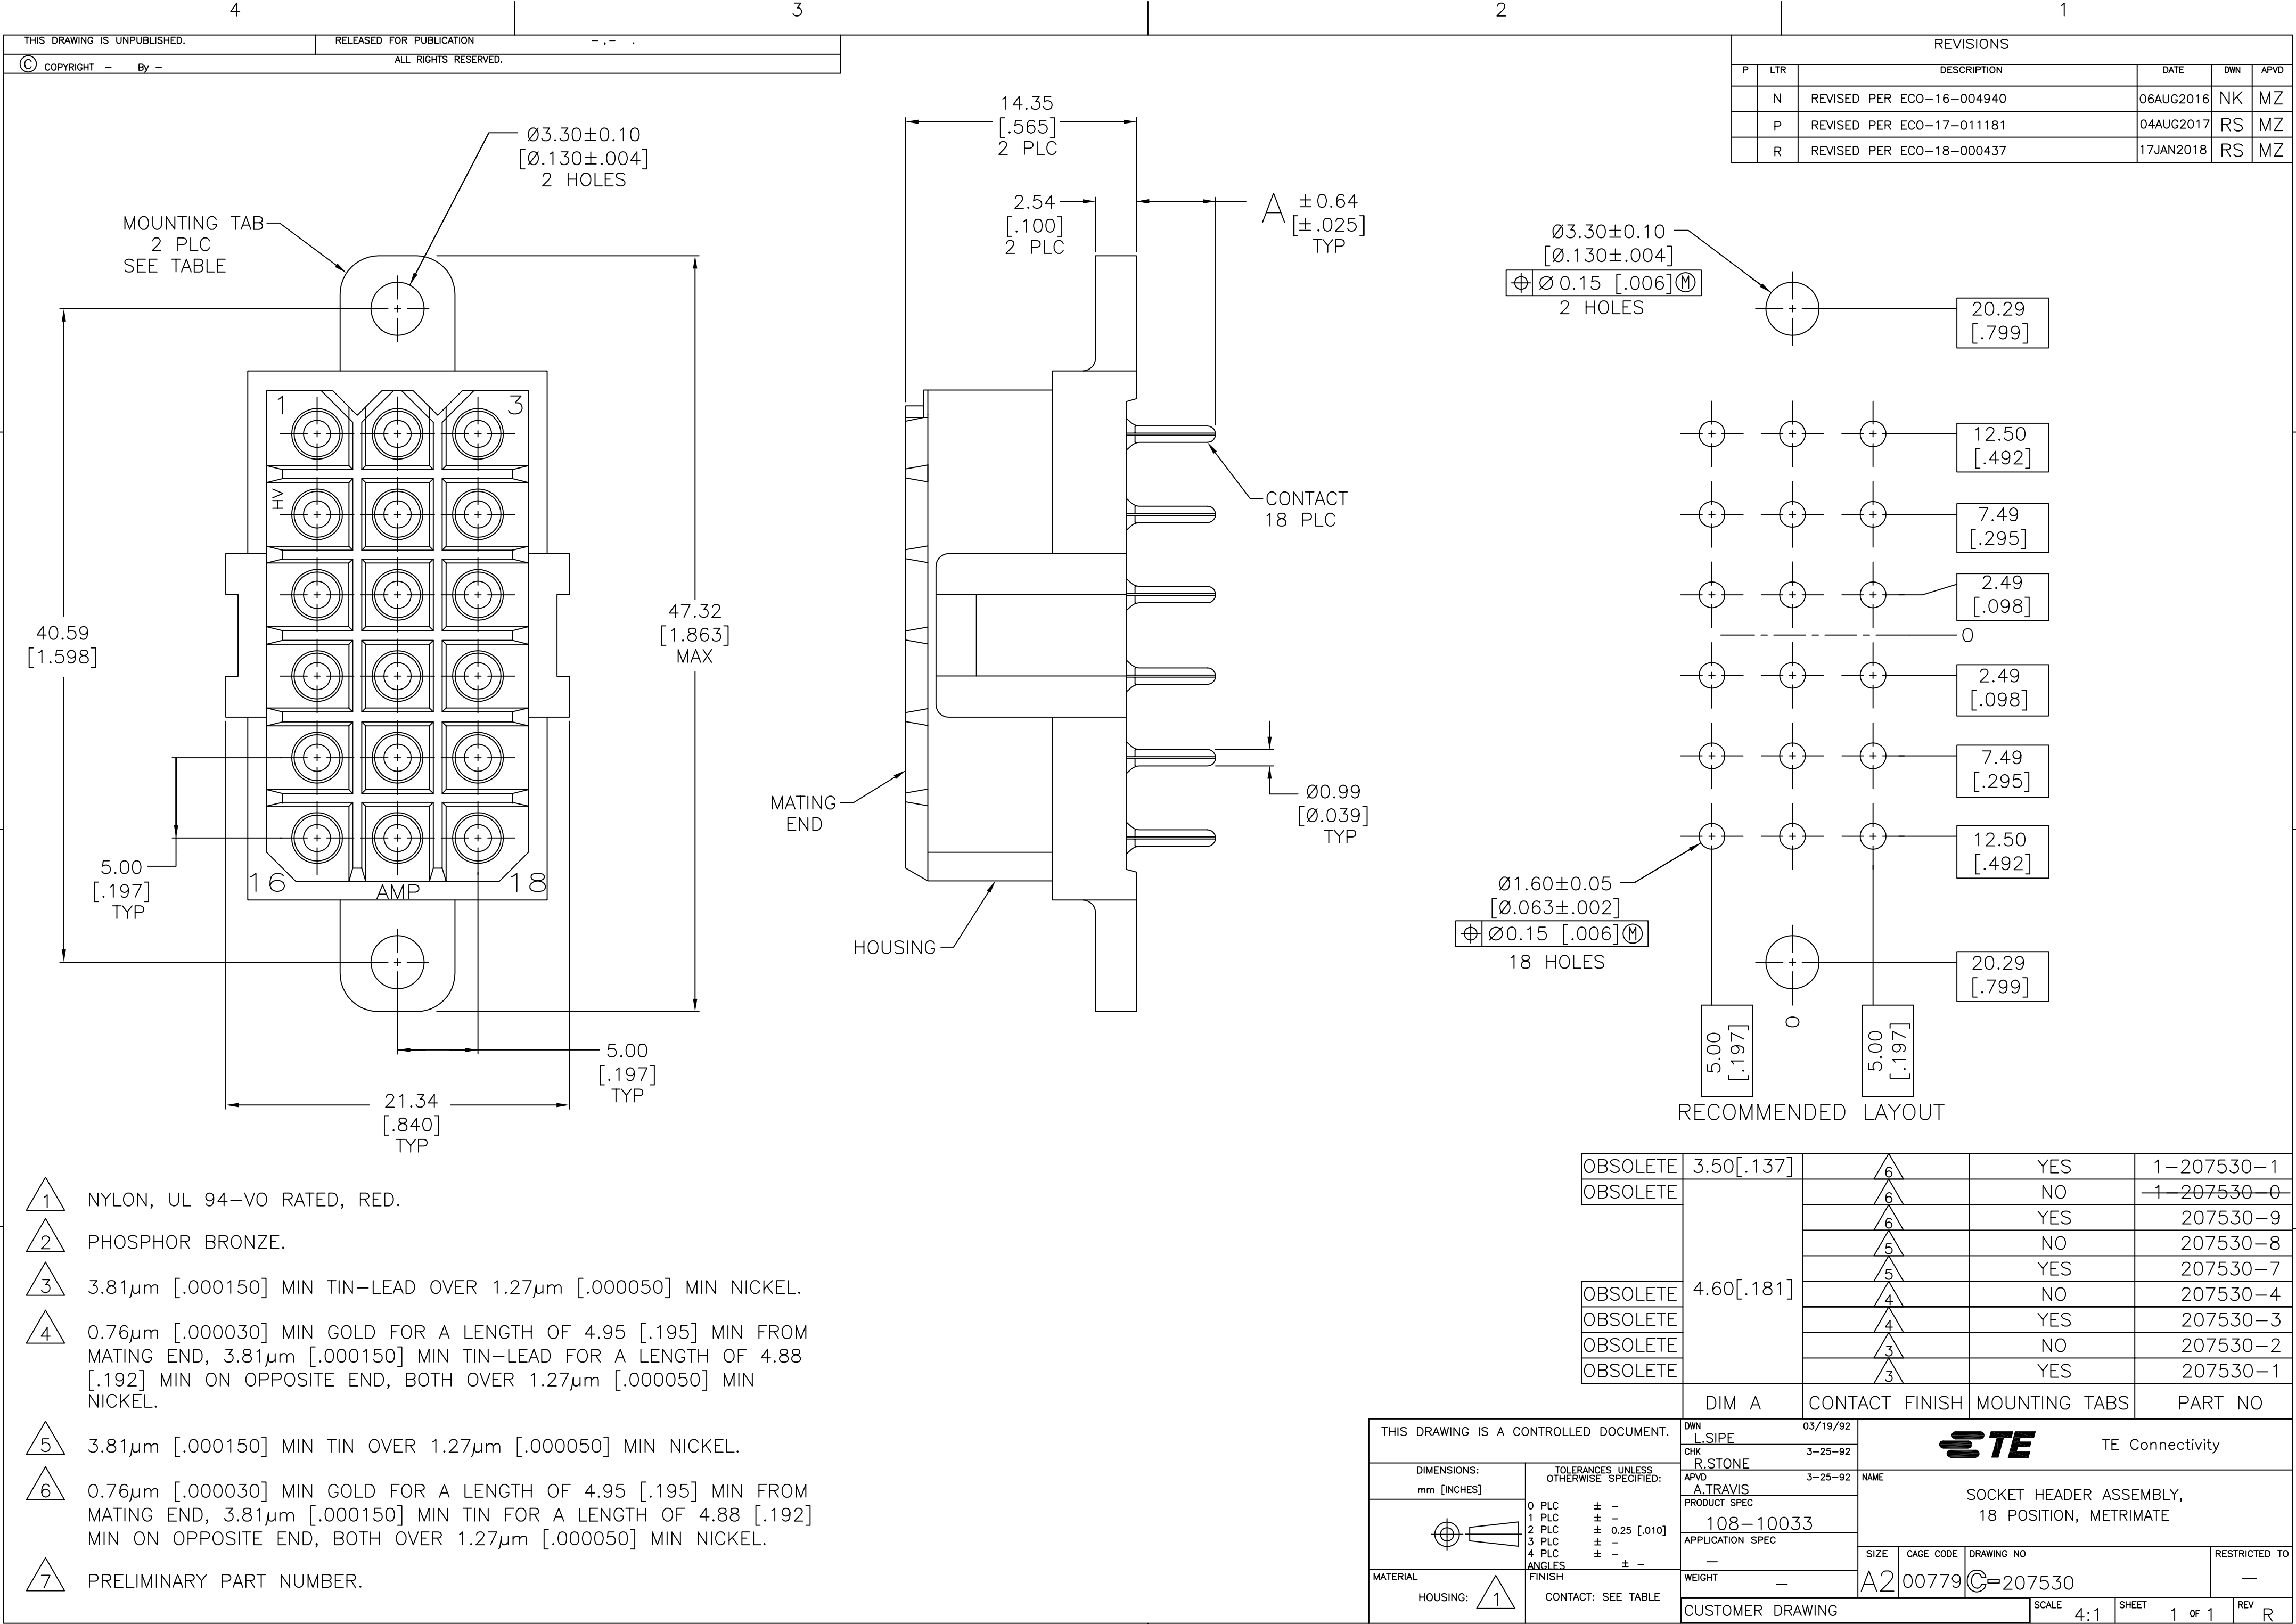

- 1 NYLON, UL 94-VO RATED, RED.
- 2 PHOSPHOR BRONZE.
- 3 $3.81\mu\text{m}$ [.000150] MIN TIN-LEAD OVER $1.27\mu\text{m}$ [.000050] MIN NICKEL.
- 4 $0.76\mu\text{m}$ [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, $3.81\mu\text{m}$ [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER $1.27\mu\text{m}$ [.000050] MIN NICKEL.
- 5 $3.81\mu\text{m}$ [.000150] MIN TIN OVER $1.27\mu\text{m}$ [.000050] MIN NICKEL.
- 6 $0.76\mu\text{m}$ [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, $3.81\mu\text{m}$ [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER $1.27\mu\text{m}$ [.000050] MIN NICKEL.
- 7 PRELIMINARY PART NUMBER.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REVISED PER ECO-16-004940	06AUG2016	NK	MZ
	P	REVISED PER ECO-17-011181	04AUG2017	RS	MZ
	R	REVISED PER ECO-18-000437	17JAN2018	RS	MZ

OBSOLETE	3.50 [.137]	Δ_6	YES	1-207530-1
OBSOLETE	4.60 [.181]	Δ_6	NO	1-207530-0
		Δ_6	YES	207530-9
		Δ_5	NO	207530-8
		Δ_5	YES	207530-7
OBSOLETE		Δ_4	NO	207530-4
OBSOLETE		Δ_4	YES	207530-3
OBSOLETE		Δ_3	NO	207530-2
OBSOLETE		Δ_3	YES	207530-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/19/92		 TE Connectivity			
		L	SIPE					
		CHK	3-25-92					
		R	STONE		NAME			
		APVD	3-25-92					
		A TRAVIS						
		PRODUCT SPEC						
		108-10033						
		APPLICATION SPEC		SOCKET HEADER ASSEMBLY, 18 POSITION, METRIMATE				
		-						
		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		-		A2	00779	G=207530	-	
		CUSTOMER DRAWING		SCALE		4:1	SHEET	1 of 1
							REV	R

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207530-4](#)