
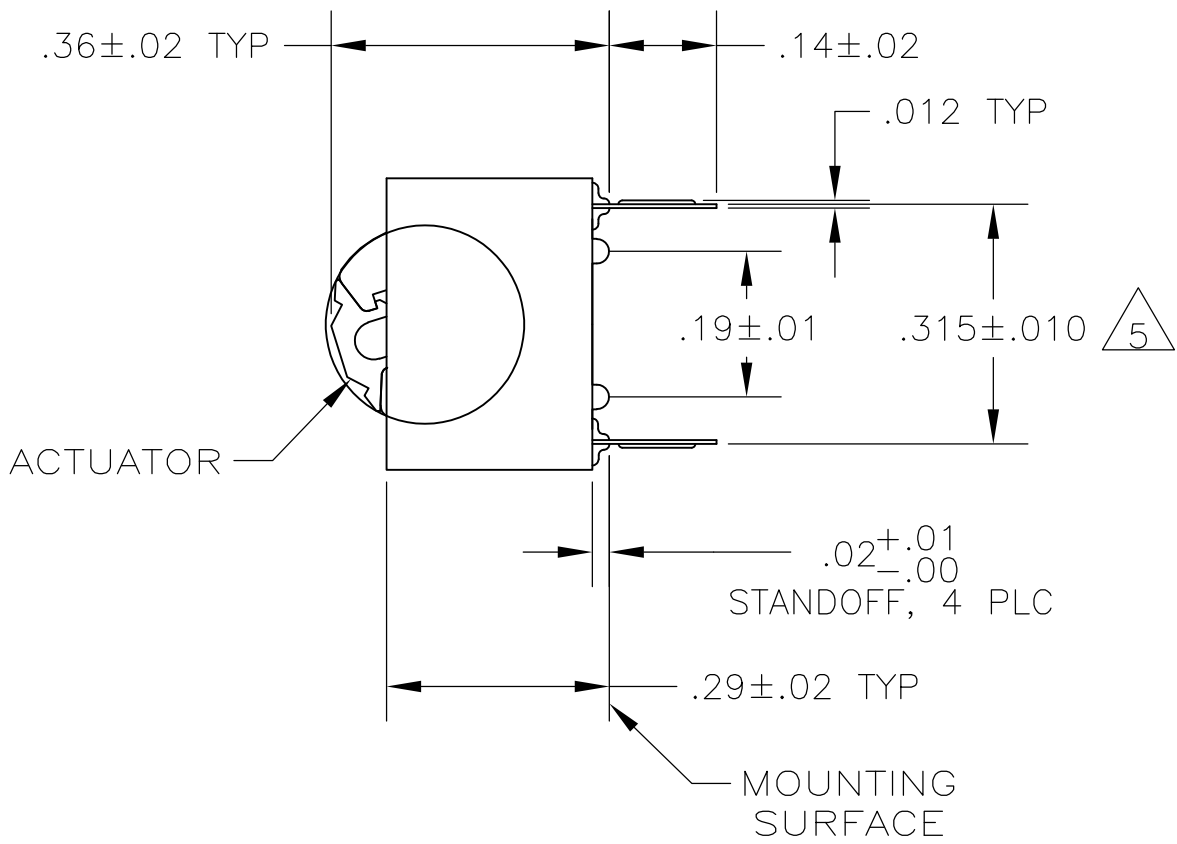


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		Z2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

D

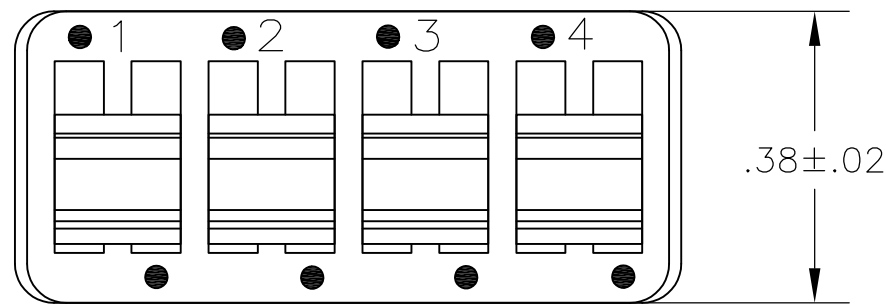

- FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- SWITCH HAS MAKE-BEFORE-BREAK OPERATION.
- ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- STAMPING WILL VARY ON 2 POSITION SIDES DUE TO SPACE RESTRICTIONS.
- .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300 +.010-.000 AT MOUNTING SURFACE.
- SWITCH POSITIONS ARE CLOSED WHEN ROCKERS ARE DOWN TOWARD DOTS.
- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

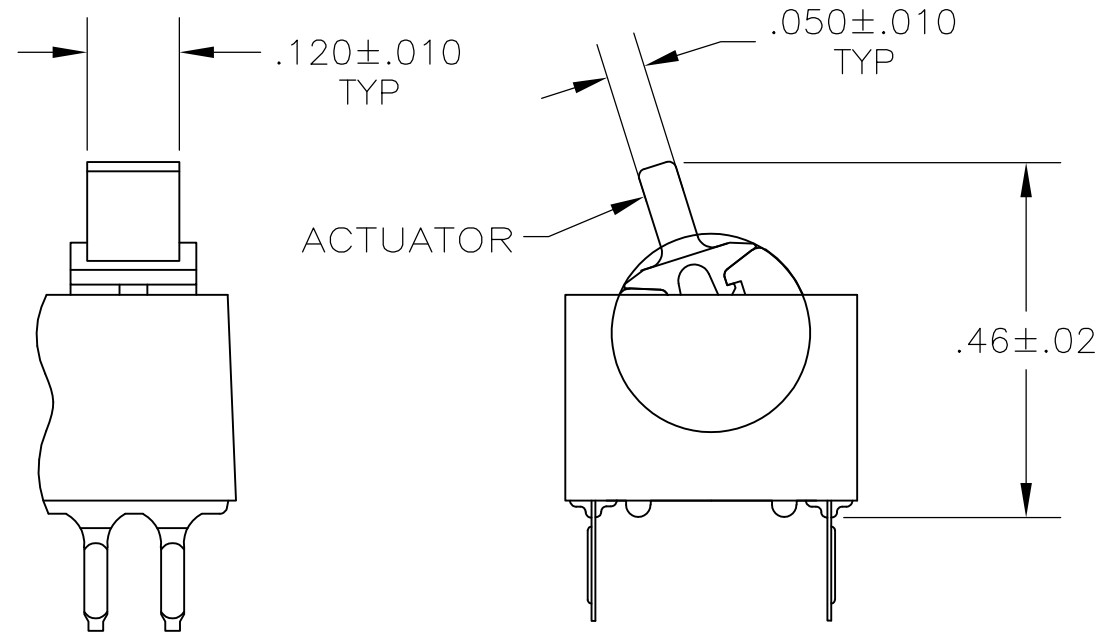
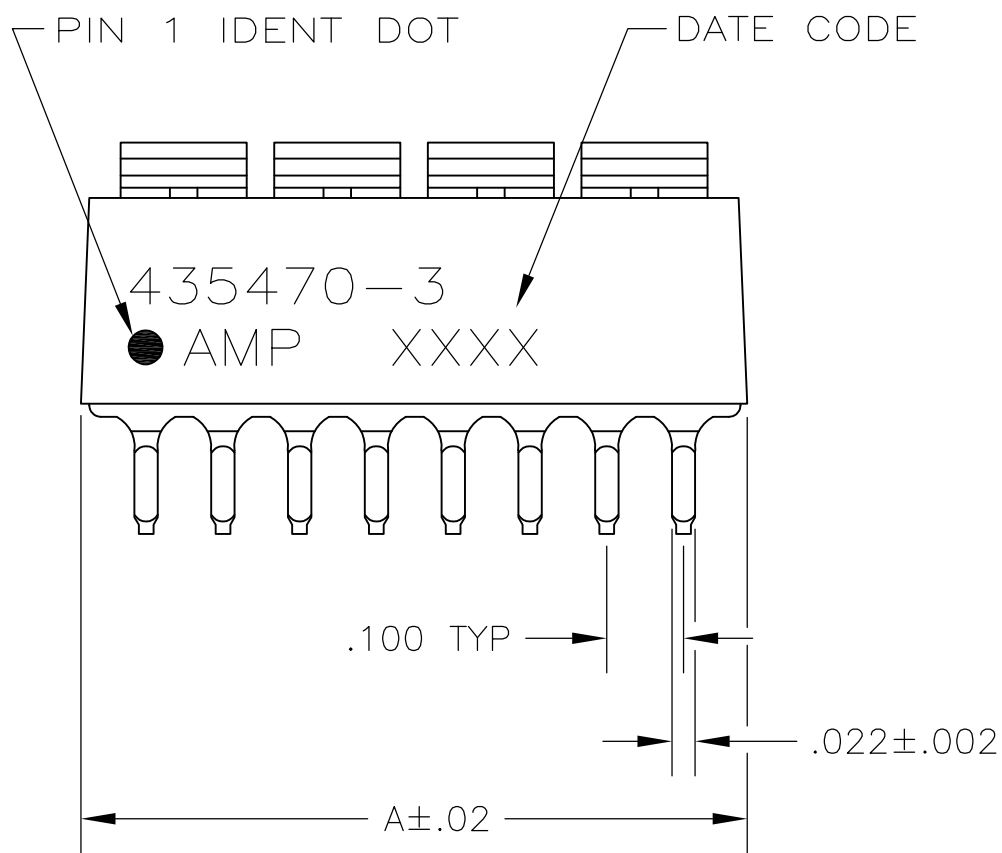


FIGURE 1
LEVER ACTUATOR SHOWN

B







FIGURE 2


FIGURE 3

FIGURE 4

A

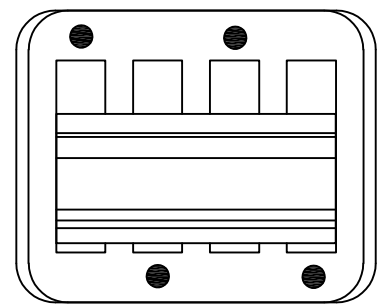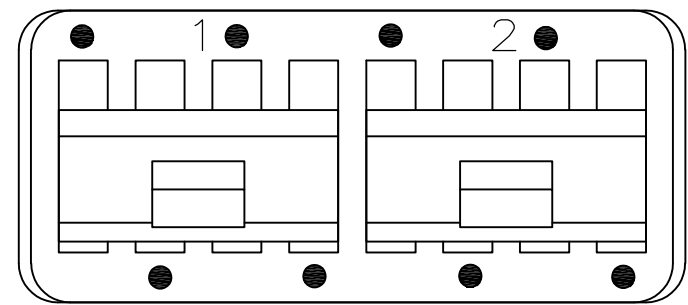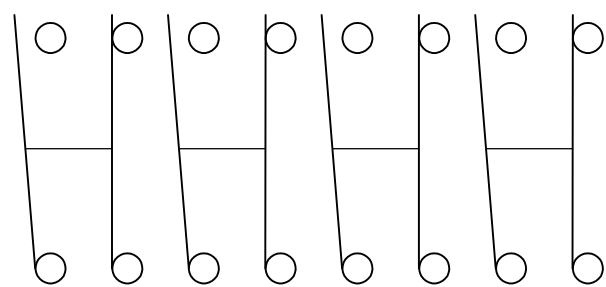

SPDT

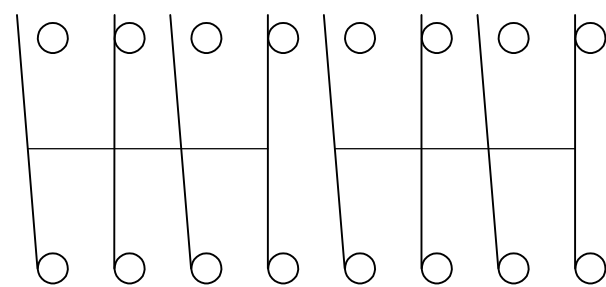

DPDT

CONTACT ARRANGEMENT

OBSOLETE 8	FIG 1	FIG 3	.48	DPDT	4	8-435470-1	8
	-FIG 1	AS SHOWN	1.28	SPDT	12	7-435470-6	8
	-FIG 1	AS SHOWN	1.08	SPDT	10	7-435470-5	8
	-FIG 1	AS SHOWN	.88	SPDT	8	7-435470-4	8
	-FIG 1	AS SHOWN	.48	SPDT	4	7-435470-2	8
OBSOLETE 8	FIG 1	FIG 4	.28	SPDT	2	7-435470-1	8
	AS SHOWN	FIG 2	.88	DPDT	8	5-435470-9	8
	AS SHOWN	FIG 4	.28	SPDT	2	5-435470-7	8
	AS SHOWN	FIG 3	.48	DPDT	4	5-435470-5	8
	AS SHOWN	AS SHOWN	.88	SPDT	8	5-435470-3	8
OBSOLETE 8	AS SHOWN	AS SHOWN	.68	SPDT	6	5-435470-2	8
	AS SHOWN	AS SHOWN	.48	SPDT	4	5-435470-1	8
	FIG 1	FIG 2	1.28	DPDT	12	3-435470-3	8
	FIG 1	FIG 2	.88	DPDT	8	3-435470-2	8
	FIG 1	FIG 3	.48	DPDT	4	3-435470-1	8
OBSOLETE 8	FIG 1	NONE	.88	SPDT	8	2-435470-7	8
	-FIG 1	AS SHOWN	1.28	SPDT	12	2-435470-6	8
	-FIG 1	AS SHOWN	1.08	SPDT	10	2-435470-5	8
	FIG 1	AS SHOWN	.88	SPDT	8	2-435470-4	8
	FIG 1	AS SHOWN	.68	SPDT	6	2-435470-3	8
OBSOLETE 8	-FIG 1	AS SHOWN	.48	SPDT	4	2-435470-2	8
	-FIG 1	FIG 4	.28	SPDT	2	2-435470-1	8
	AS SHOWN	FIG 2	.88	DPDT	8	435470-9	8
	AS SHOWN	AS SHOWN	1.28	SPDT	12	435470-8	8
	AS SHOWN	FIG 4	.28	SPDT	2	435470-7	8
OBSOLETE 8	AS SHOWN	FIG 3	.48	DPDT	4	435470-5	8
	AS SHOWN	AS SHOWN	1.08	SPDT	10	435470-4	8
	AS SHOWN	AS SHOWN	.88	SPDT	8	435470-3	8
	AS SHOWN	AS SHOWN	.68	SPDT	6	435470-2	8
	AS SHOWN	AS SHOWN	.48	SPDT	4	435470-1	8
ACTUATOR		TOP MARKING	A	SWITCH TYPE	NO. OF POSN	PART NO	

435470-3 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.TALLEY 15MAR90	TE Connectivity				
DIMENSIONS: INCHES		CHK R.MILLER 27MAR90					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H.LEITER 27MAR90	NAME				
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		PRODUCT SPEC - APPLICATION SPEC -	SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPDT & DPDT				
MATERIAL HOUSING & ROCKER: POLYESTER CONTACTS: BERYLLIUM COPPER		FINISH CONTACTS: PLATED .000030 MIN GOLD IN CONTACT AREA OVER .000050 MIN NICKEL	SIZE A2	CAGE CODE 00779	DRAWING NO C=435470	RESTRICTED TO -	
CUSTOMER DRAWING		WEIGHT -	SCALE 4:1	SHEET 1 of 1	REV Z2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-435470-2](#)