

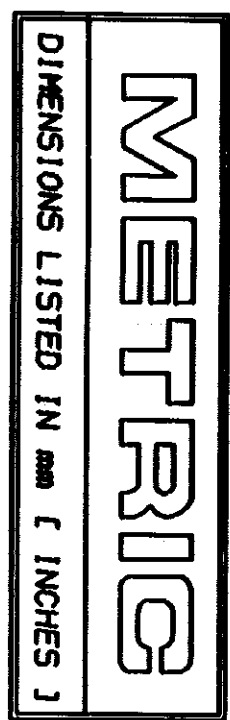


LOG	DIST	REV	DATE	APP
6	14			
REVISIONS				
DESCRIPTION			DATE	APP
REVISED PER 0720-0230-93			2/25/94	AMP

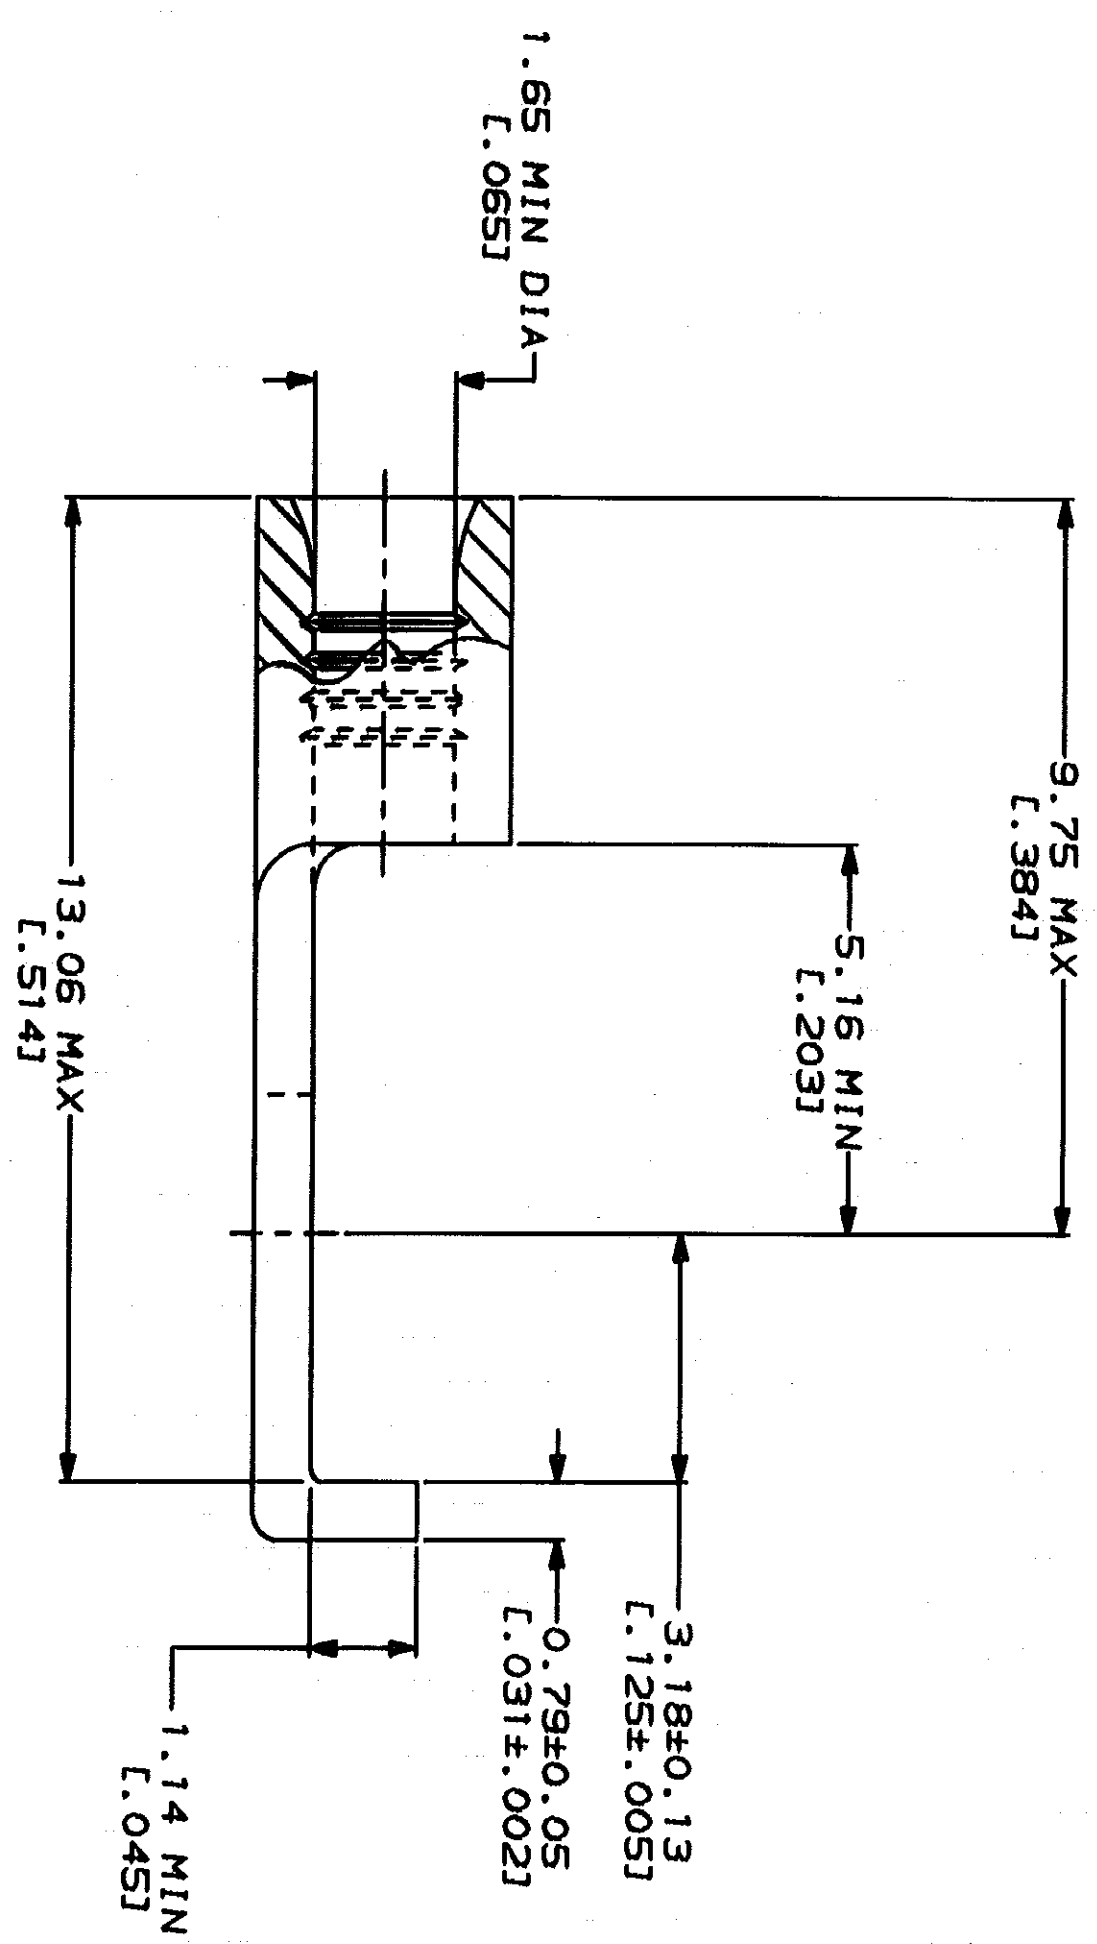

AMP WIRE RANGE	UL E13288 Listed
22-16 AWG STRANDED	22-16 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

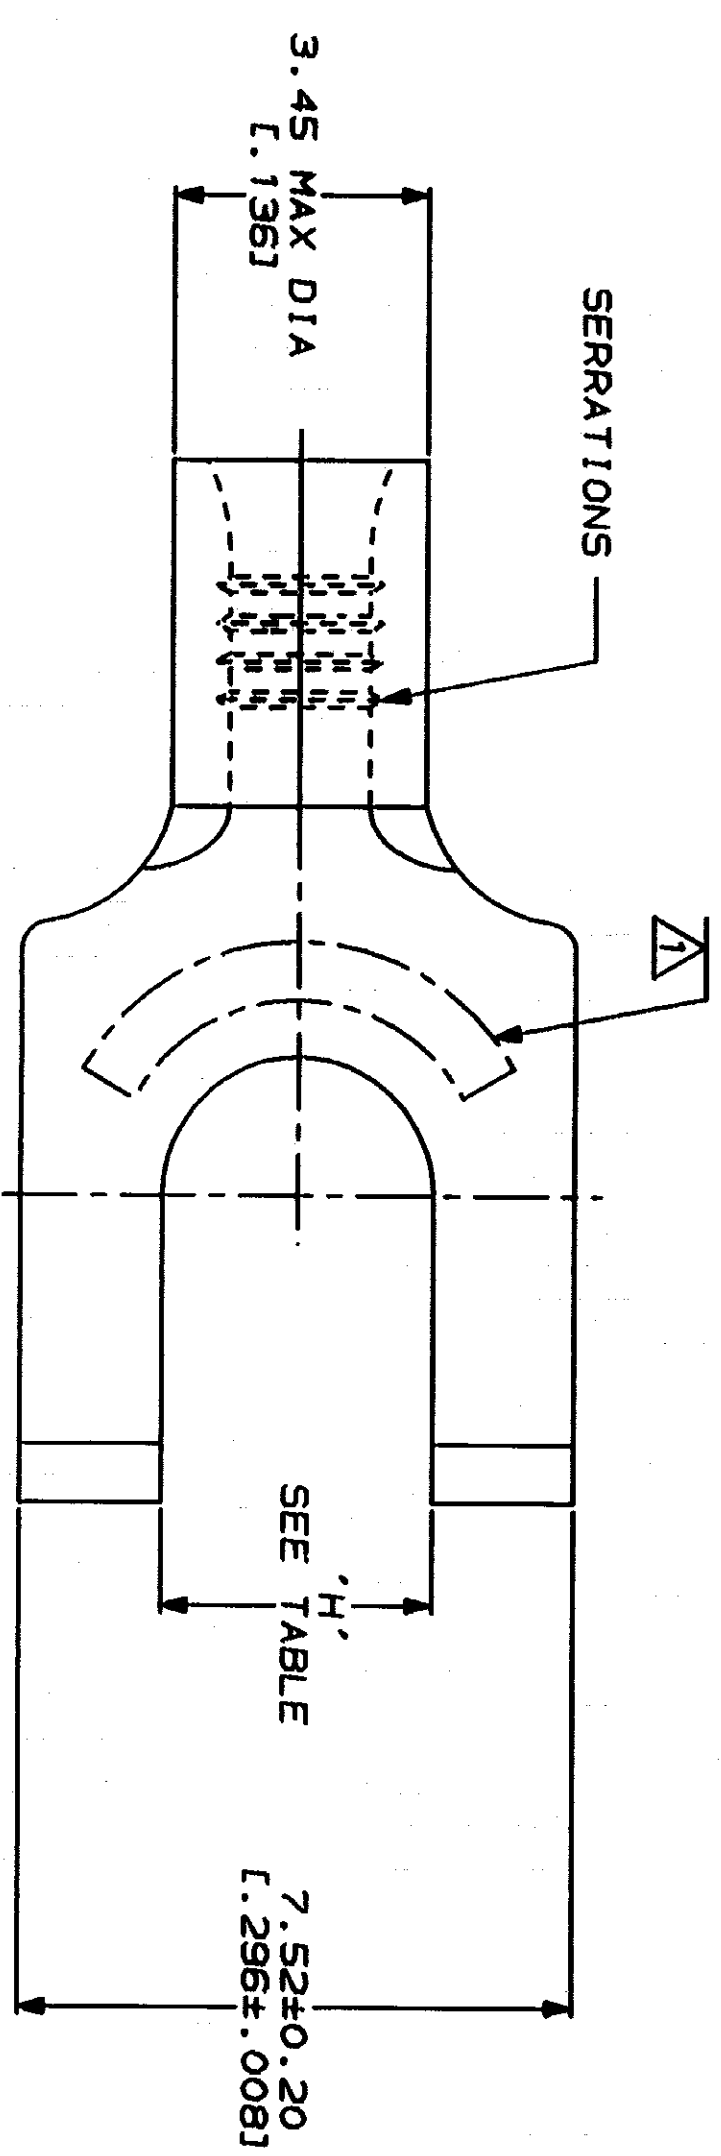

QUANTITY	STUD SIZE	H	PACKAGING TYPE	PART NO
5000	8	4.34±0.08 [.171±.003]	1-32418-2 ON TAPE	1-32418-4
---	8	4.34±0.08 [.171±.003]	LOOSE PIECE	1-32418-2
---	6	3.68±0.08 [.145±.003]	LOOSE PIECE	32418

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION
1-800-722-1111

FOR ORDER ENTRY
1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² (509-3,260) CIR MILS
STRANDED

FINISH
TIN PLATE
0.00254L (0.00100) MIN
THK PER MIL-T-10727

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN - - - - - (INCHES)
2 PLG DEC ± - -
3 PLG DEC ± - -
ANGLES

MATERIAL
COPPER PER
ASTM B-152
ANNEALED

APPD 3-2-93
DE MILLER

APPD 3-2-93
JL NECKLEY

AMP INCORPORATED
Harrisburg, PA 17105-3508

TERMINAL, FLANGED
SPADE, BUDGET

SIZE
CAGE CODE
DRAWING NO
SCALE 10:1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[32418](#)