

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC
JDIST
-

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN


APVD

P REVISED PER ECO-11-005294

20APR11

RK

HMR

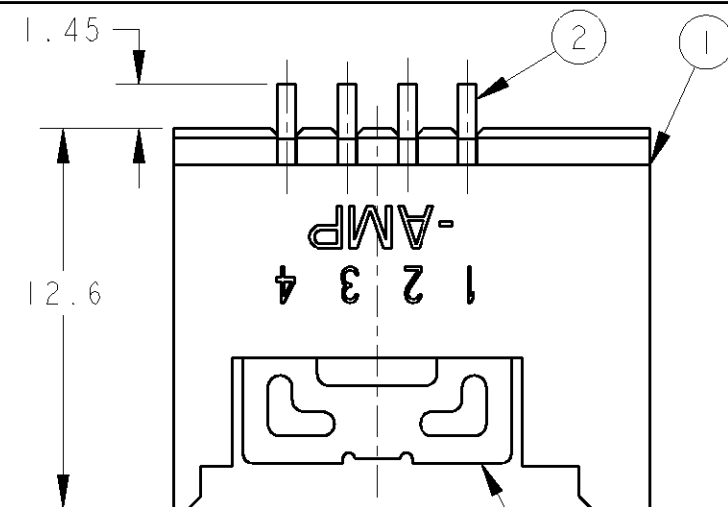

材料及びめっき:

コンタクト: 銅合金、下地ニッケル 1.27μm以上

接点部: 金メッキ0.2μm以上、半田付け部: 錫メッキ1~3μm

ハウジング: 熱可塑性樹脂

ペグ: 銅合金、下地ニッケル 1.27μm以上

半田付け部: 錫メッキ1~3μm



MATERIAL & FINISH

CONTACT: COPPER ALLOY, UNDER Ni PLATING 1.27μmMIN





CONTACT AREA: Au PLATING 0.2μmMIN

TINE AREA: TIN PLATING 1~3μm

HOUSING: THERMO PLASTIC

SOLDER PEG: COPPER ALLOY, UNDER Ni PLATING 1.27μmMIN

TINE AREA: TIN PLATING 1~3μm

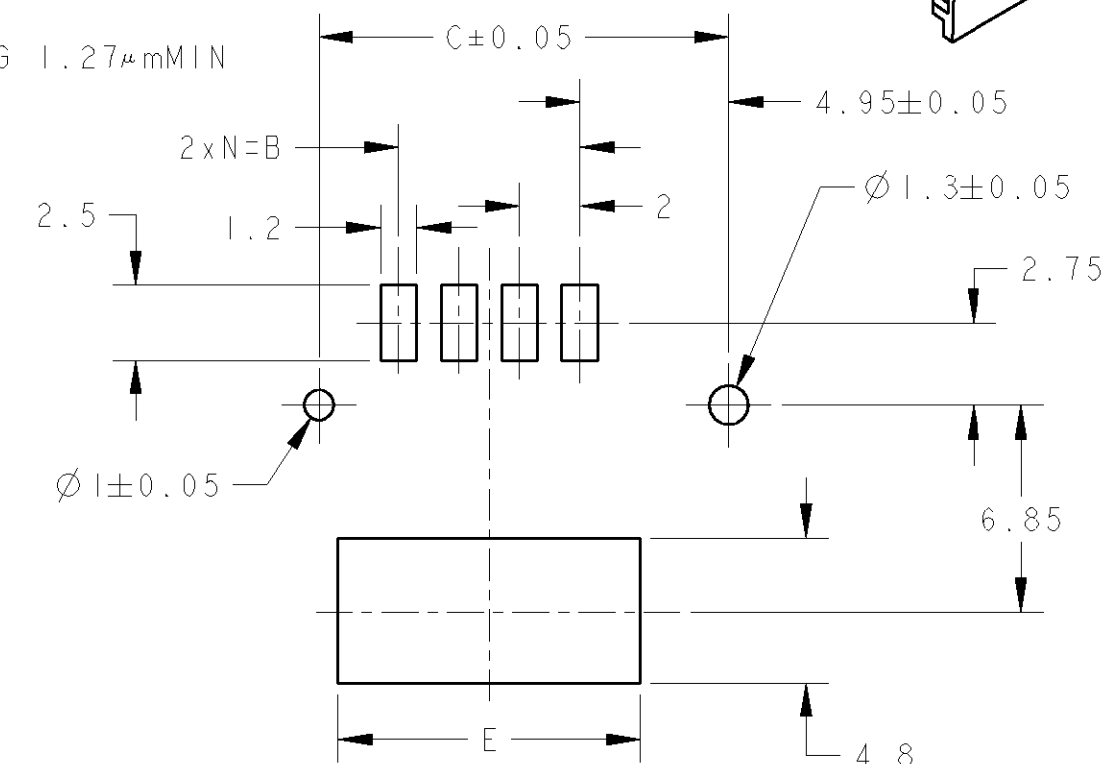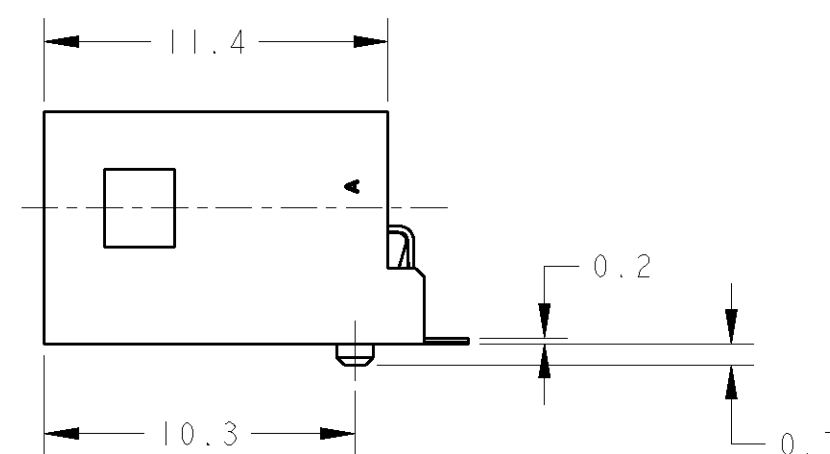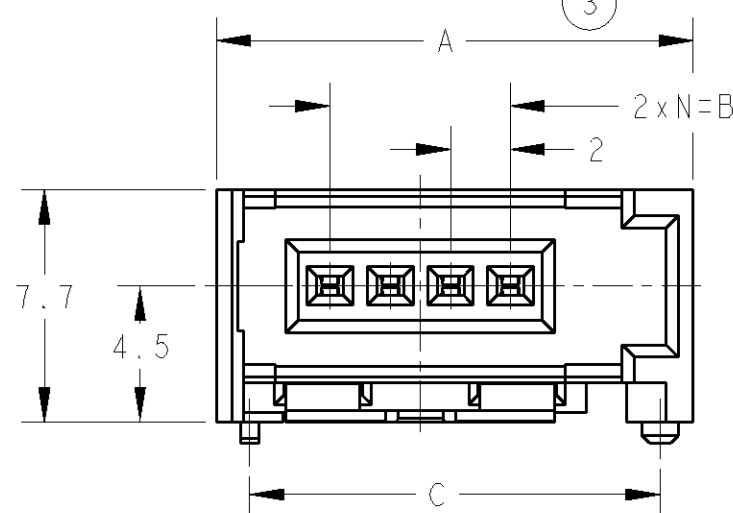



1565994-3, 4: AS SHOWN

参考基板寸法 (実装面側)

REFERENCE DIMENSION OF PCB (MOUNTING SIDE)

1.1g	0.95g	1.1g	0.95g										
1	1	1	1	SOLDER PEG									3
4	3	4	3	HDR CONTACT									2
1				HSR HSG, 4P, W/O BOSS	10	8.9	-	6	15.8	3	4	1	
	1			HDR HSG, 3P, W/O BOSS	8	6.9	-	4	13.8	2	3	1	
		1		HDR HSG, 4P, WITH BOSS	10	8.9	13.6	6	15.8	3	4	1	
			1	HDR HSG, 3P, WITH BOSS	8	6.9	11.6	4	13.8	2	3	1	
1- -4	1- -3	-4	-3	NAME	E	D	C	B	A	N	POS	ITEM	

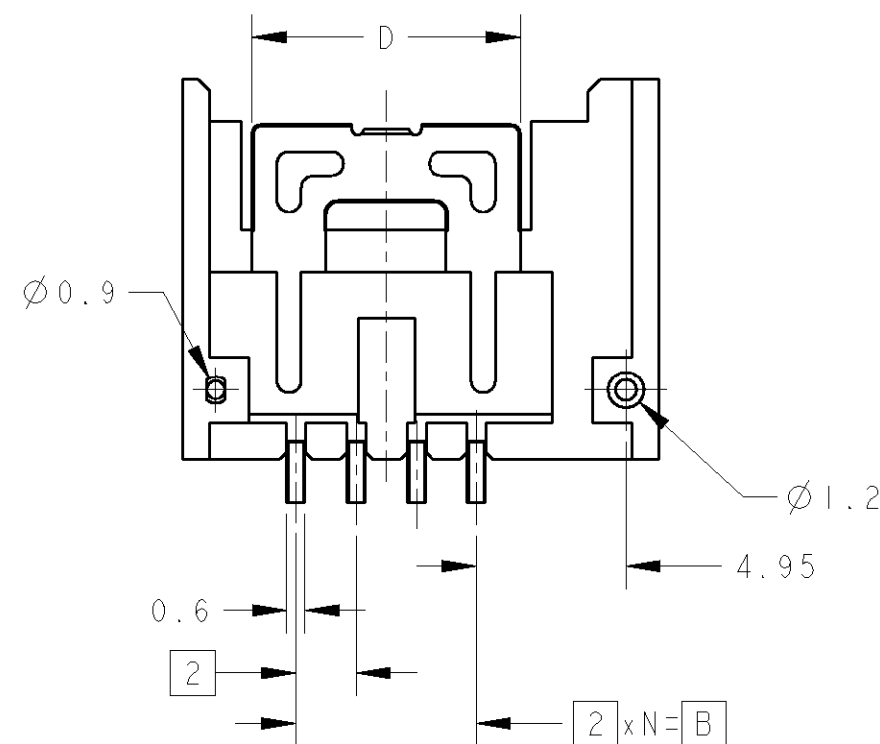

		DWN M. Kimura 18APR2002		 TE Connectivity					
		CHK Y. KASHIWA 18APR2002							
DIMENSIONS: 単位: 概 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.25 0-PLC ± 1-PLC ±0.1 2-PLC ±0.01 3-PLC ±0.001 4-PLC ±0.0001 ANGLES ±3		NAME 名称		HDR ASSEMBLY, RIGHT ANGLE SMT TYPE RITS CONNECTOR WITH BOSS			
		PRODUCT SPEC 製品規格 108-5765		APPLICATION SPEC 取付適用規格					
MATERIAL 材料		FINISH 仕上		WEIGHT TABLE		SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-1565994	RESTRICTED TO -
SEE NOTE 		SEE NOTE 		CUSTOMER DRAWING		SCALE 尺度 1:1	SHEET 1	OF 3	REV P

4

3

2

1






THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT


ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	-	-	-	SEE SHEET 1	-	-

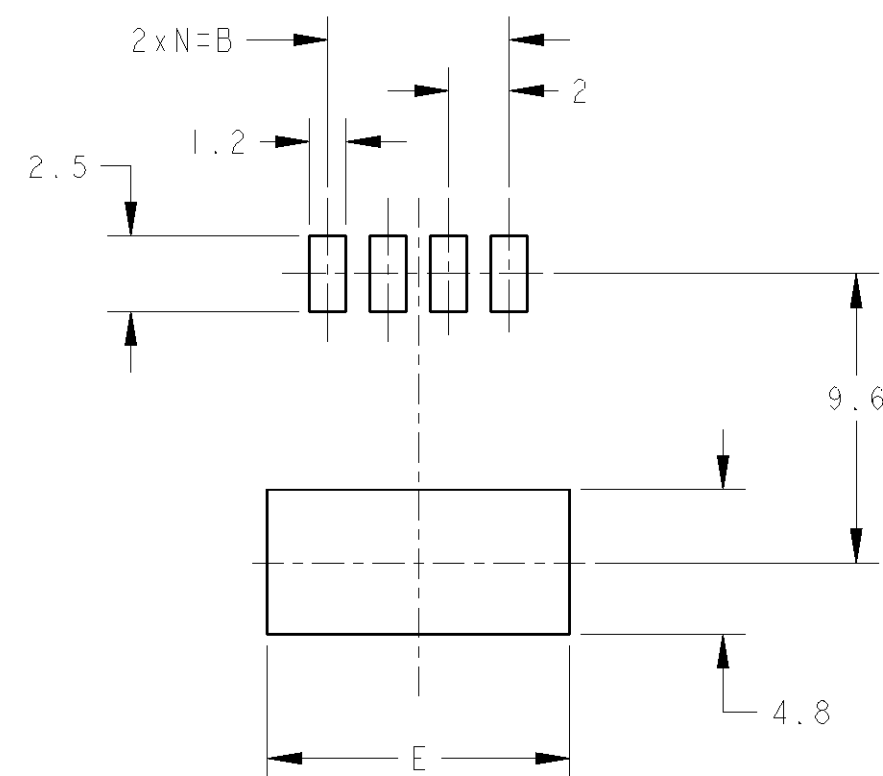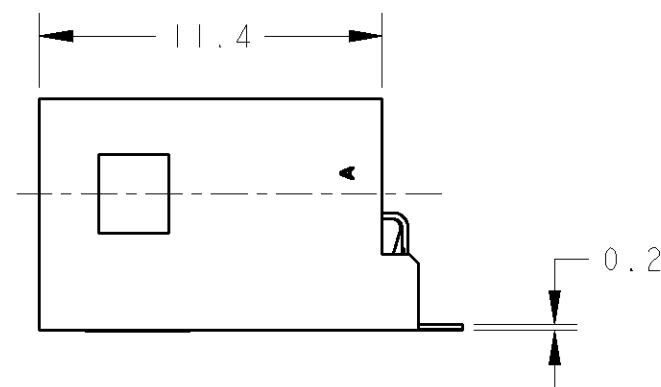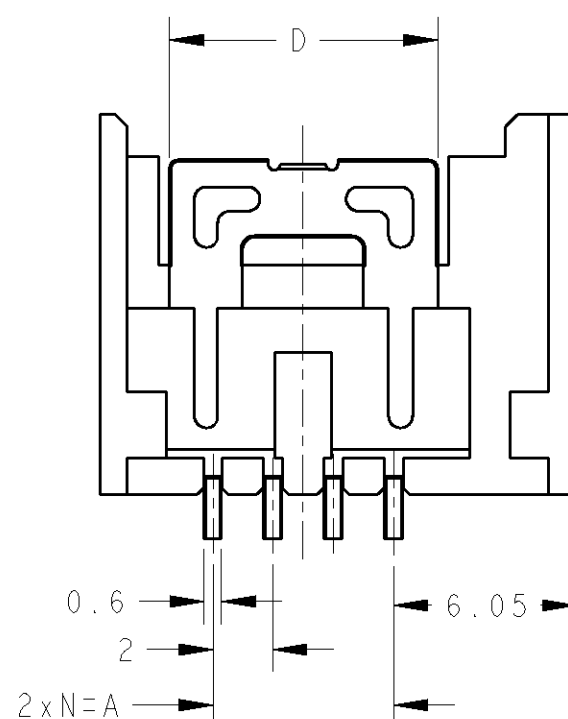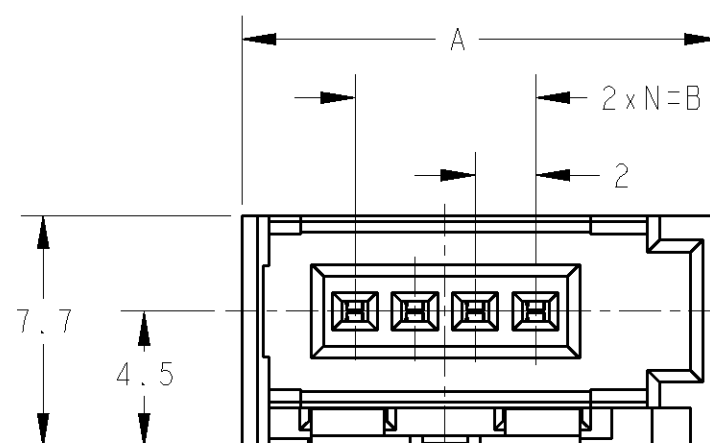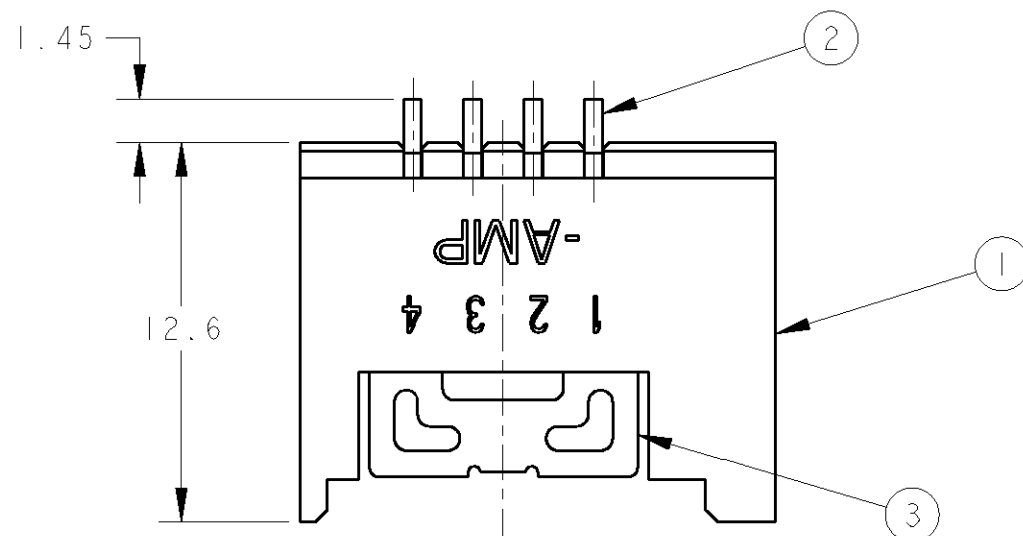

1-1565994-3, 4: AS SHOWN

参考基板寸法 (実装面側)
REFERENCE DIMENSION OF PCB (MOUNTING SIDE)

DIMENSIONS: 単位: 概 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.25 0-PLC ± 1-PLC ±0.1 2-PLC ±0.01 3-PLC ±0.001 4-PLC ±0.0001 ANGLES ±3		DWN M. Kimura 18APR2002	 TE Connectivity			
				CHK Y. KASHIWA 18APR2002				
		PRODUCT SPEC 製品規格 108-5765		APVD Y. KASHIWA 18APR2002	NAME 名称 HDR ASSEMBLY, RIGHT ANGLE SMT TYPE RITS CONNECTOR WITHOUT BOSS			
				APPLICATION SPEC 取付適用規格 -				
MATERIAL 材料 -		FINISH 仕上 -		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-1565994	RESTRICTED TO -
				CUSTOMER DRAWING				SCALE 尺度 4:1

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION


DATE

DWN

APVD

SEE SHEET 1

リール引出し方向
DIRECTION OFF TOP PF REEL

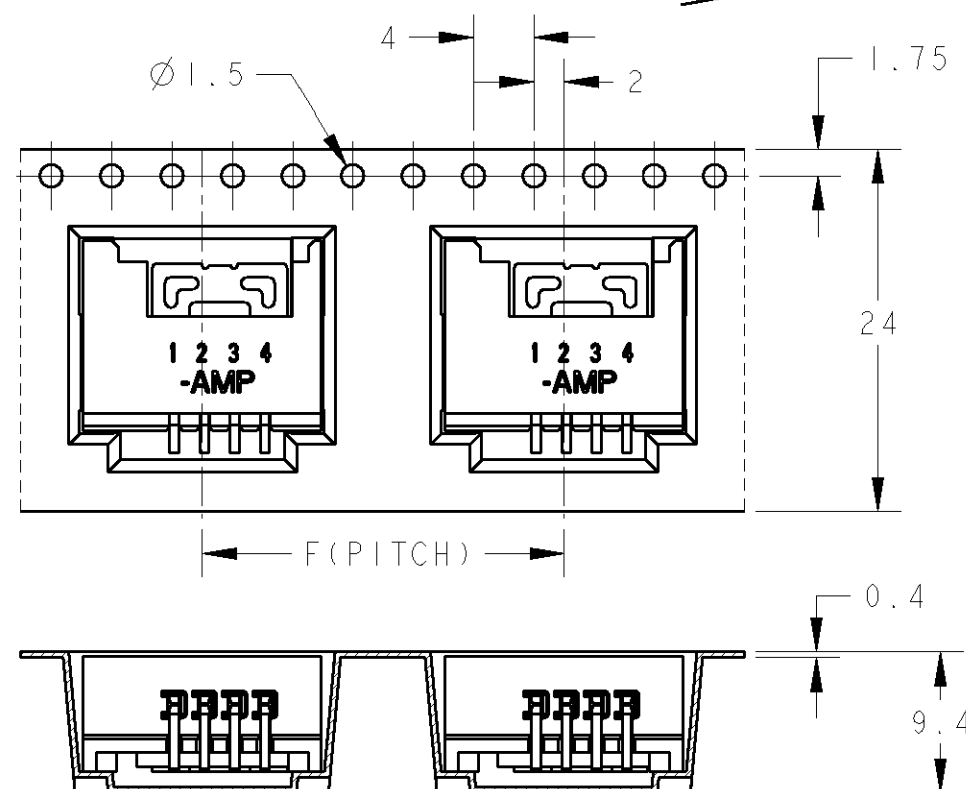

PACKING STYLE

カバーテープリーダ部外周1巻
WEEDING THE COVER TAPE AROUND THE
OUTER PERIPHERY IN A TURN.

REEL SIZE:
330DIAx80DIA(HUB)x31.5W(25.5W INSIDE)

APPROX 300mm程度 空部 WITHOUT CHARGE
製品装填部 WITH PRODUCT CHARGE
APPROX 300mm程度 空部 WITHOUT CHARGE

200	4	24	1-1565994-4
250	3	20	1-1565994-3
200	4	24	1565994-4
250	3	20	1565994-3
QTY	POS	F	PART NO.

DIMENSIONS: 単位: 概 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ± 0.3 0-PLC $\pm$ 1-PLC $\pm$ 2-PLC $\pm$ 3-PLC $\pm$ 4-PLC $\pm$ ANGLES ± 3		DWN M. Kimura 18APR2002 CHK Y. KASHIWA 18APR2002 APVD Y. KASHIWA 18APR2002	TE Connectivity	
MATERIAL 材料		FINISH 仕上		PRODUCT SPEC 製品規格 -	NAME 名称 HDR ASSEMBLY, RIGHT ANGLE SMT TYPE RITS CONNECTOR EMBOSS ASSY	
				APPLICATION SPEC 取付適用規格 -	SIZE A3	CAGE CODE 00779
				WEIGHT -	DRAWING NO C=1565994	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 尺度 NONE	SHEET 3 OF 3	REV P

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1565994-3](#)