
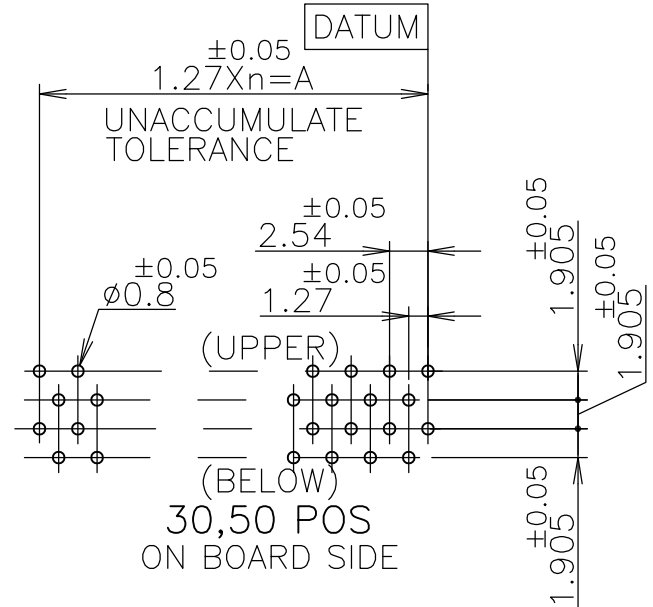
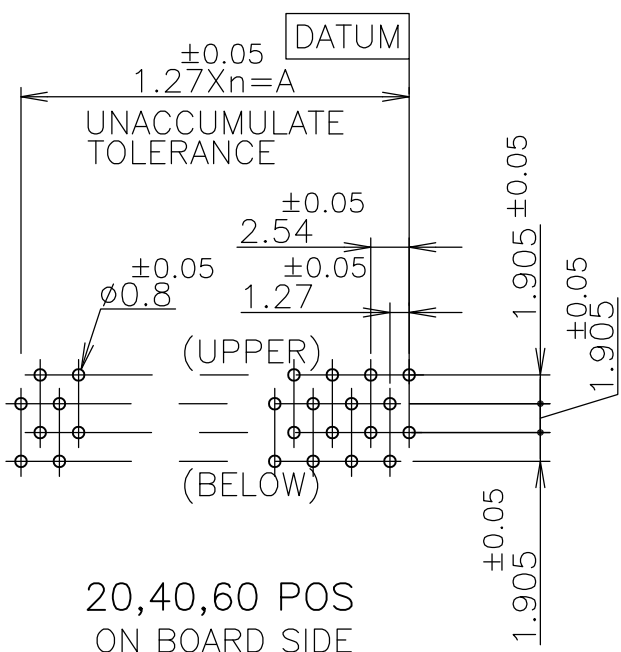
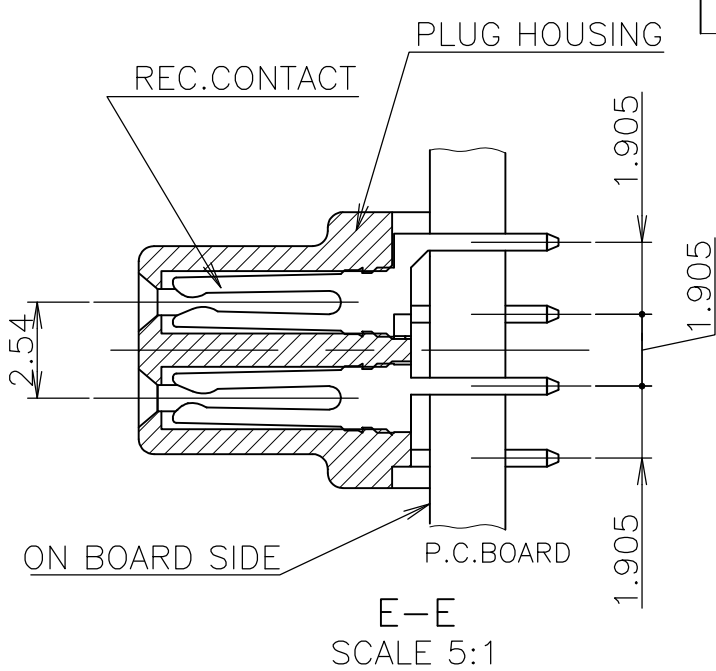


LOC	DIST	REVISIONS 変更				
		P	LTR	DESCRIPTION	DATE	DWN APVD
J	/		B	REVISED PER ECO-15-002720	02MAR2015	AP SB

40,60 POS

30,50 POS

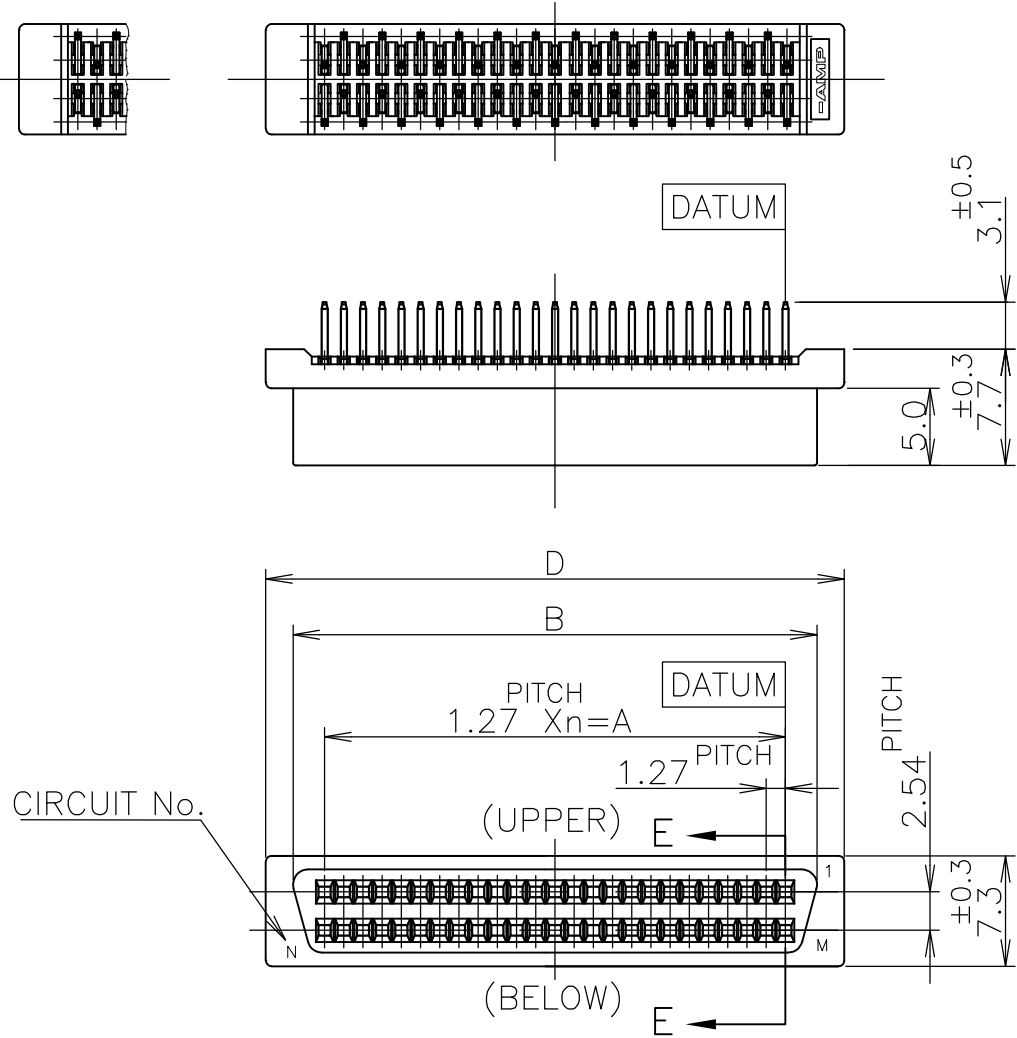

- 1 USE A P.C.B. WHOSE ARE TREATED WITH SOLDER RESIST.
- 2 SHOW P.C.B LAYOUT FROM ON BOARD SURFACE SIDE.
- 3 NUMBER THE CONTACT IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM "DATUM" SIDE.
- 4 HOUSING MATERIAL : P.B.T(UL94V-0) / BLACK
- 5 CONTACT MATERIAL : PHO-BRONZE
- 6 FINISH : NICKEL 0.00127 MIN THK. OVERALL SELECTIVE GOLD 0.00076 MIN. OR 0.0002 MIN. THK ON CONTACT AREA AND TIN 0.001 MIN THK. ON TINE AREA.

6-	-5	20	9	11.43	15.60	19.20	Au PL. 0.00076 MIN.
6-	-4	60	29	36.83	41.00	44.60	
6-	-3	50	24	30.48	34.65	38.26	
6-	-2	40	19	24.13	28.30	31.90	
6-	-1	30	14	17.78	21.95	25.55	
	-5	20	9	11.43	15.60	19.20	Au PL. 0.0002 MIN.
	-4	60	29	36.83	41.00	44.60	
	-3	50	24	30.48	34.65	38.26	
	-2	40	19	24.13	28.30	31.90	
	-1	30	14	17.78	21.95	25.55	
PART NUMBER		POS	n	A	B	D	REMARK

OBSOLETE

GENERAL TOLERANCE 一般公差	
10 ≥ : ±0.2	
30 ≥ > 10: ±0.25	
100 ≥ > 30: ±0.3	
ANGLES: ±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL
材料
SEE NOTE 4/5

DWN
GAVIN ZHANG
06JUL04

CHK
T. KAWAMAE
06JUL04

APVD
I. ENOMOTO
06JUL04

PRODUCT SPEC
製品規格
108-60036

APPLICATION SPEC
取付適用規格

WEIGHT

TE Connectivity

NAME
名称
PLUG ASSY (VERTICAL W/O SCREW HOLE)
AMPLIMITE 050 SERIES I B-TO-B CONN.

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-5174215

RESTRICTED TO

CUSTOMER DRAWING

SCALE
尺度
2:1

SHEET
1 OF 1

REV
B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-5174215-4](#)