


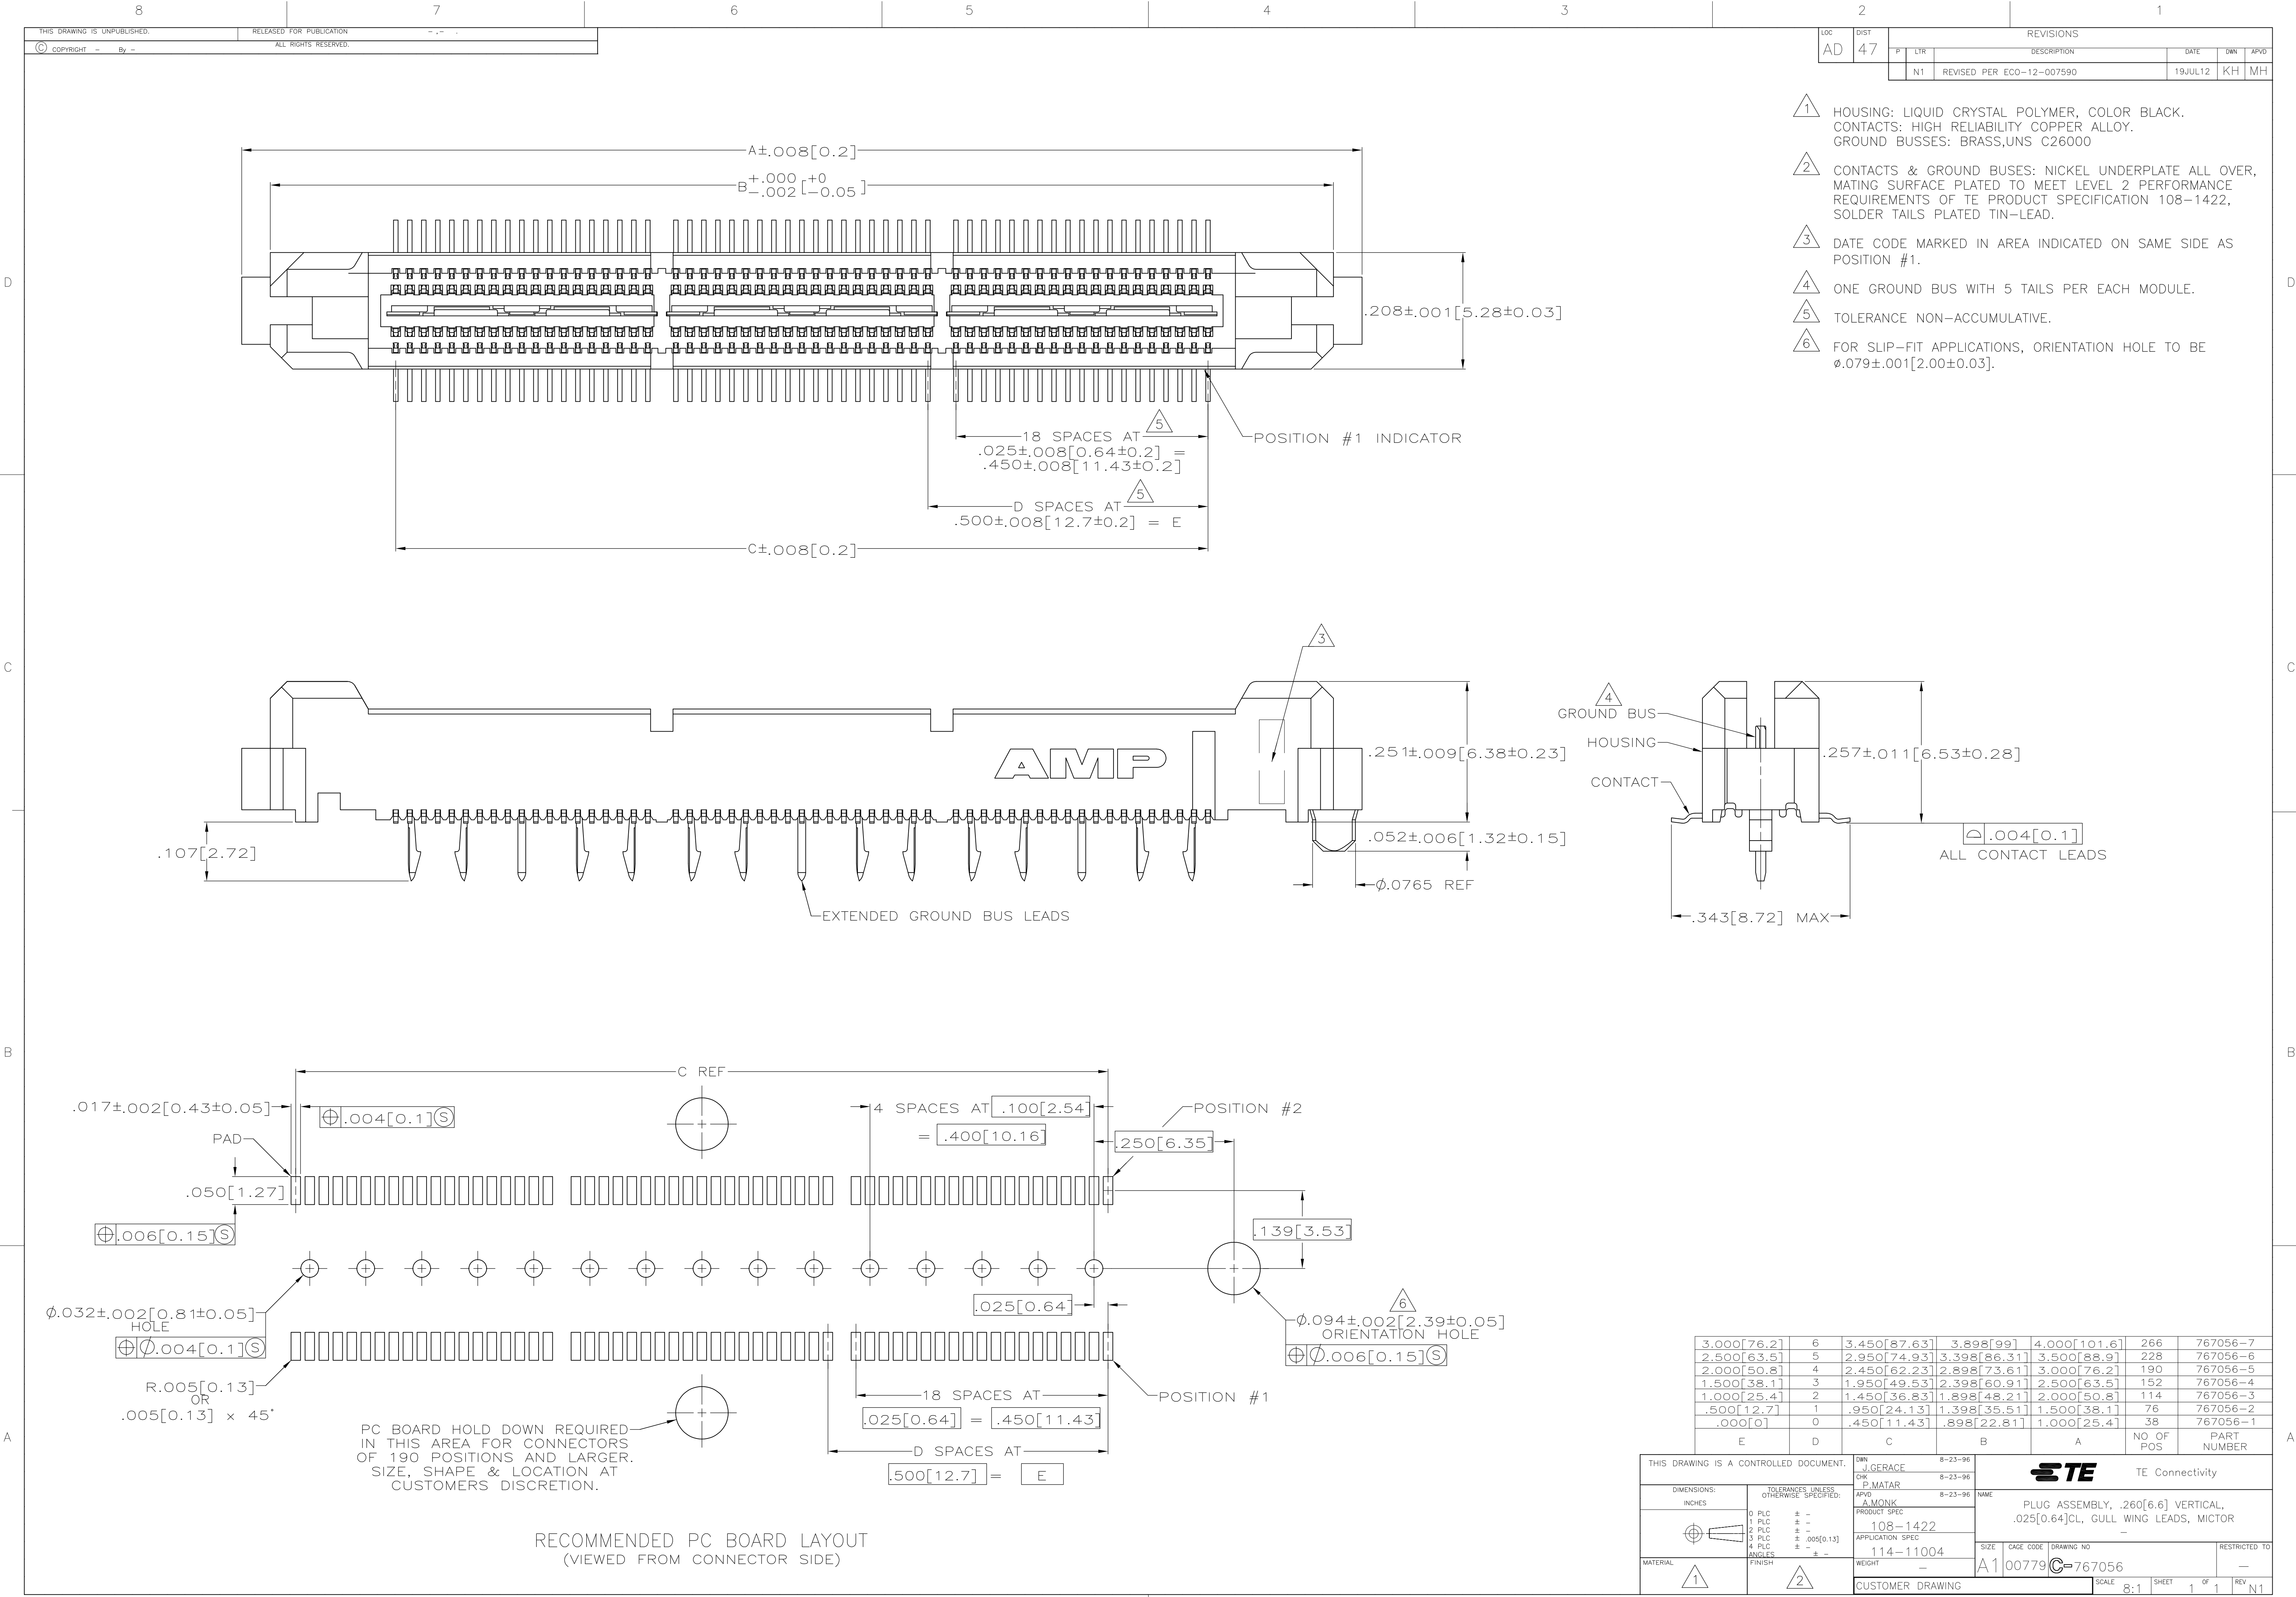

- 1 HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: BRASS,UNS C26000
- 2 CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER,
MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE
REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422,
SOLDER TAILS PLATED TIN-LEAD.
- 3 DATE CODE MARKED IN AREA INDICATED ON SAME SIDE AS
POSITION #1.
- 4 ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- 5 TOLERANCE NON-ACCUMULATIVE.
- 6 FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE
φ.079 ± .001[2.00 ± 0.03].

3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266	767056-7
2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.500[88.9]	228	767056-6
2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	767056-5
1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	767056-4
1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	767056-3
.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	767056-2
.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	767056-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.GERACE 8-23-96	TE Connectivity			
DIMENSIONS: INCHES		CHK P.MATAR 8-23-96				
	0 PLC	± -	NAME A.MONK PRODUCT SPEC 108-1422 APPLICATION SPEC 114-11004			
	1 PLC	± -				
	2 PLC	± -				
	3 PLC	± .005(0.13)				
	4 PLC	± -	SIZE A1 CAGE CODE 00779 DRAWING NO 767056 RESTRICTED TO -			
	ANGLES	± -				
MATERIAL 1	FINISH 2	WEIGHT -	CUSTOMER DRAWING			
		SCALE 8:1	SHEET 1	OF 1	REV N1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[767056-7](#)