

Printed-circuit board connector - MCO 1,5/ 4-GL-3,81 GY7035 - 1766802

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB headers, nominal current: 8 A, number of positions: 4, pitch: 3.81 mm, color: light gray, contact surface: Tin, mounting: Wave soldering


The figure shows a 10-position version of the product

Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

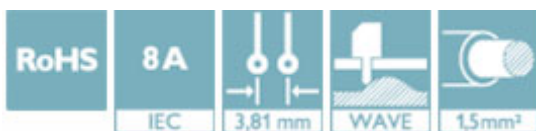

Key Commercial Data

Packing unit	50 pc
GTIN	 4 046356 433754
GTIN	4046356433754

Technical data

Dimensions

Pitch	3.81 mm
Dimension a	11.43 mm
Height	8 mm
Length of the solder pin	3 mm
Pin dimensions	0.9 x 0.32 mm

General

Range of articles	MCO 1,5/..-GL
Rated voltage (III/3)	125 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	8 A
Color	light gray
Number of positions	4

Standards and Regulations

Printed-circuit board connector - MCO 1,5/ 4-GL-3,81 GY7035 - 1766802

Technical data

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals


Approvals


Approvals


IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

Ex Approvals

Approval details


IECEE CB Scheme		http://www.iecee.org/	DE1-60987-B1B2
Nominal voltage UN	125 V		
Nominal current IN	8 A		

VDE Gutachten mit Fertigungsüberwachung		http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40011723
Nominal voltage UN	125 V		
Nominal current IN	8 A		

EAC		B.01742
-----	---	---------

Printed-circuit board connector - MCO 1,5/ 4-GL-3,81 GY7035 - 1766802

Approvals

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-20050718
	D	B
Nominal voltage UN	300 V	300 V
Nominal current IN	8 A	8 A

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1766802](#)