



ICA-320-SGT



ICA-624-ZEGG

(2,54mm) .100"

ICA SERIES

AUTOMATED INSERTION DIP SOCKETS

Mates with:
APA

ICA

ROW SPACING &
NO. OF CONTACTS


STYLE
OPTION

PLATING
OPTION

OPTION
(Leave Blank for
Standard Version)

Specify from chart below

- Side & end stackable
- Great for auto insertion
- Open body design

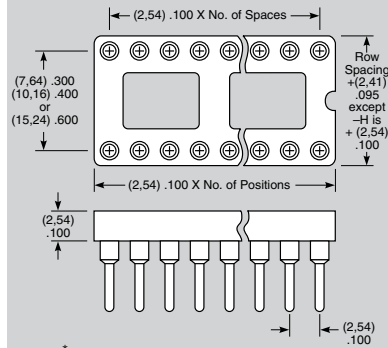

	Row Space	No. of Contacts
-308	.300 (7,62)	08
-314		14
-316		16
-318		18
-320		20
-322*		22
-324	.400 (10,16)	24
-328		28
-422	.600 (15,24)	22
-624		24
-628	.600 (15,24)	28
-632		32
-640		40
-648		48

GG

= 30μ" (0,76μm)
Gold contact,
10μ" (0,25μm)
Gold Shell

GT

= 30μ" (0,76μm)
Gold contact,
Tin Shell

ST

= 10μ" (0,25μm)
Gold contact,
Tin shell (Styles -S
& -ZS only)

-2
= .360 (9,14)
Tail


**Wire-Wrap
Option**

Requires Style
-W or -ZW
Specify desired
suffix for shorter
Wire-Wrap tail.

-3
= .260 (6,60)
Tail

-L
= Locking
Socket

Requires Style
-S or -ZS



Requires GT
Plating Option

SPECIFICATIONS

For complete specifications
see www.samtec.com?ICA

Insulator Material:
Black Glass Filled
Polyester
except -328 is LCP
Contact: BeCu
Shell: Brass

Plating:

Au or Sn over 50μ" Ni

Flammability Rating:

UL 94V-O

Insulation Resistance:

5000 MΩ min

Temperature Range:

-55°C to +105°C with Tin

-55°C to +125°C with Gold.

Withstanding Voltage:

1000 VRMS

Current Rating: 1A

Contact Resistance:

10mΩ max

Lead Size Range:

.015" (0,38mm) to .022"

(0,56mm) DIA and most IC leads

Insertion Force:

(Single contact only)

Standard = 9 oz avg, 16 oz max;

Low Insertion Force =

2.5 oz avg, 5.5 oz max

Withdrawal Force:

(Single contact only)

Standard = 2.5 oz avg, 1.5 oz

min; Low Insertion Force =

2.0 oz avg, 0.35 oz min

Lead-Free Solderable:

Wave only

RoHS Compliant: Yes




Note: Some sizes, styles and
options are non-standard,
non-returnable.

-S, -ZS, -ZA


= Printed Circuit

-ZS & -ZA = Low Insertion Force



LEAD STYLE	X DIA	Y TAIL	Z
-S or -ZS	(0,51) .020	(3,18) .125	(7,62) .300
-ZA	(0,51) .020	(4,57) .180	(8,89) .350

Locking lead
available with -S
and -ZS.
See OPTION.



Insertion Depth = .095" (2,41) to .145" (3,68):

Style S Component Part No. = SC-1P1

Style ZS Component Part No. = EZ-1P1


Style ZA Component Part No. = EZ-6P1

Option L Component Part No. = SC-1L1 or EZ-1L1

-W, -ZW

= Wire-Wrap

ZW = Low Insertion Force




Shorter wire-wrap tail
lengths available.
See OPTION.

Insertion Depth = .125" (3,18) to .157" (3,99)
Style W Component Part No. = SC-1W1(1)
Style W-2 Component Part No. = SC-1W1(2)
Style W-3 Component Part No. = SC-1W1(3)
Style ZW-2 Component Part No. = EZ-1W1(2)
Style ZW-3 Component Part No. = EZ-1W1(3)

-ZE

= Elevated

Low Insertion Force



Insertion Depth = .125" (3,18) to .170" (4,32)
Style ZE Component Part No. = EZ-2P3

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[ICA-314-SST](#) [ICA-320-SGG](#) [ICA-316-STT](#) [ICA-318-STT](#) [ICA-308-STT](#) [ICA-320-SGT](#) [ICA-640-STT](#) [ICA-628-SGT](#)
[ICA-640-SGT](#) [ICA-316-SGT](#) [ICA-324-SGT](#) [ICA-632-STT](#) [ICA-324-SST](#) [ICA-632-SST](#) [ICA-324-STT](#) [ICA-314-SGG](#)
[ICA-628-STT](#) [ICA-308-SGT](#) [ICA-308-SST](#) [ICA-640-SGG](#) [ICA-314-SGT](#) [ICA-628-SST](#) [ICA-308-SGG](#) [ICA-316-SGG](#)
[ICA-632-SGT](#) [ICA-640-ZEGT](#) [ICA-640-ATT](#) [ICA-316-WTT-3](#) [ICA-316-ZWGG](#) [ICA-316-ZWGG-3](#) [ICA-308-ZAGG](#)
[ICA-308-ZEGT](#) [ICA-314-WGG-3](#) [ICA-314-ZWGT](#) [ICA-316-SST](#) [ICA-316-WGG](#) [ICA-316-ZHGT](#) [ICA-316-ZSGG](#) [ICA-](#)
[318-ATT](#) [ICA-318-WTT-2](#) [ICA-320-ATT](#) [ICA-316-JGG](#) [ICA-316-SGG-L](#) [ICA-316-ZHGG](#) [ICA-318-ZWTT-2](#) [ICA-308-](#)
[AGT](#) [ICA-308-WTT](#) [ICA-308-ZSGT](#) [ICA-308-ZWGT-3](#) [ICA-316-WGG-3](#) [ICA-316-ZSST](#) [ICA-320-SGG-L](#) [ICA-314-](#)
[ZHGT](#) [ICA-316-AGG](#) [ICA-316-ATT](#) [ICA-316-ZWGG-2](#) [ICA-316-ZWGT](#) [ICA-318-SST-L](#) [ICA-314-SGG-L](#) [ICA-314-](#)
[ZEGT](#) [ICA-314-ZSGG](#) [ICA-314-ZSGG-L](#) [ICA-314-ZWTT-3](#) [ICA-316-AGT](#) [ICA-308-WGG-2](#) [ICA-308-WGG-3](#) [ICA-](#)
[308-ZSTT](#) [ICA-308-ZWGG](#) [ICA-314-SGT-L](#) [ICA-314-ZAGT](#) [ICA-316-WGT-3](#) [ICA-316-WTT](#) [ICA-316-WTT-2](#) [ICA-](#)
[308-SGT-L](#) [ICA-314-KGT](#) [ICA-314-STT-L](#) [ICA-314-WGG-2](#) [ICA-314-WTT](#) [ICA-318-SGT-L](#) [ICA-318-WGG-2](#) [ICA-](#)
[318-WGT-3](#) [ICA-318-ZAGT](#) [ICA-318-ZWGT](#) [ICA-316-ZWGT-2](#) [ICA-318-SST](#) [ICA-318-WGG](#) [ICA-318-ZSGT](#) [ICA-](#)
[318-ZSST](#) [ICA-318-ZSTT](#) [ICA-318-ZWGG](#) [ICA-308-WGT-2](#) [ICA-308-ZSGG](#) [ICA-314-JGG](#) [ICA-314-WGG](#) [ICA-314-](#)
[ZAGG](#) [ICA-314-ZWTT](#) [ICA-316-KGT](#) [ICA-316-ZWTT](#) [ICA-316-ZWTT-3](#) [ICA-318-KGT](#)