


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				E	REVISED & REDRAWN PER 0720-0045-94	03MAY94	OKS DAP

METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	 E13288 Listed
14-12 AWG SOLID OR STRANDED	14-12 AWG STRANDED
 LR7189 Certified	MILITARY P/N AND CLASS
14-12 AWG SOLID OR STRANDED	NOT APPLICABLE

1 STAMP AMP 14-12* APPROX AS SHOWN

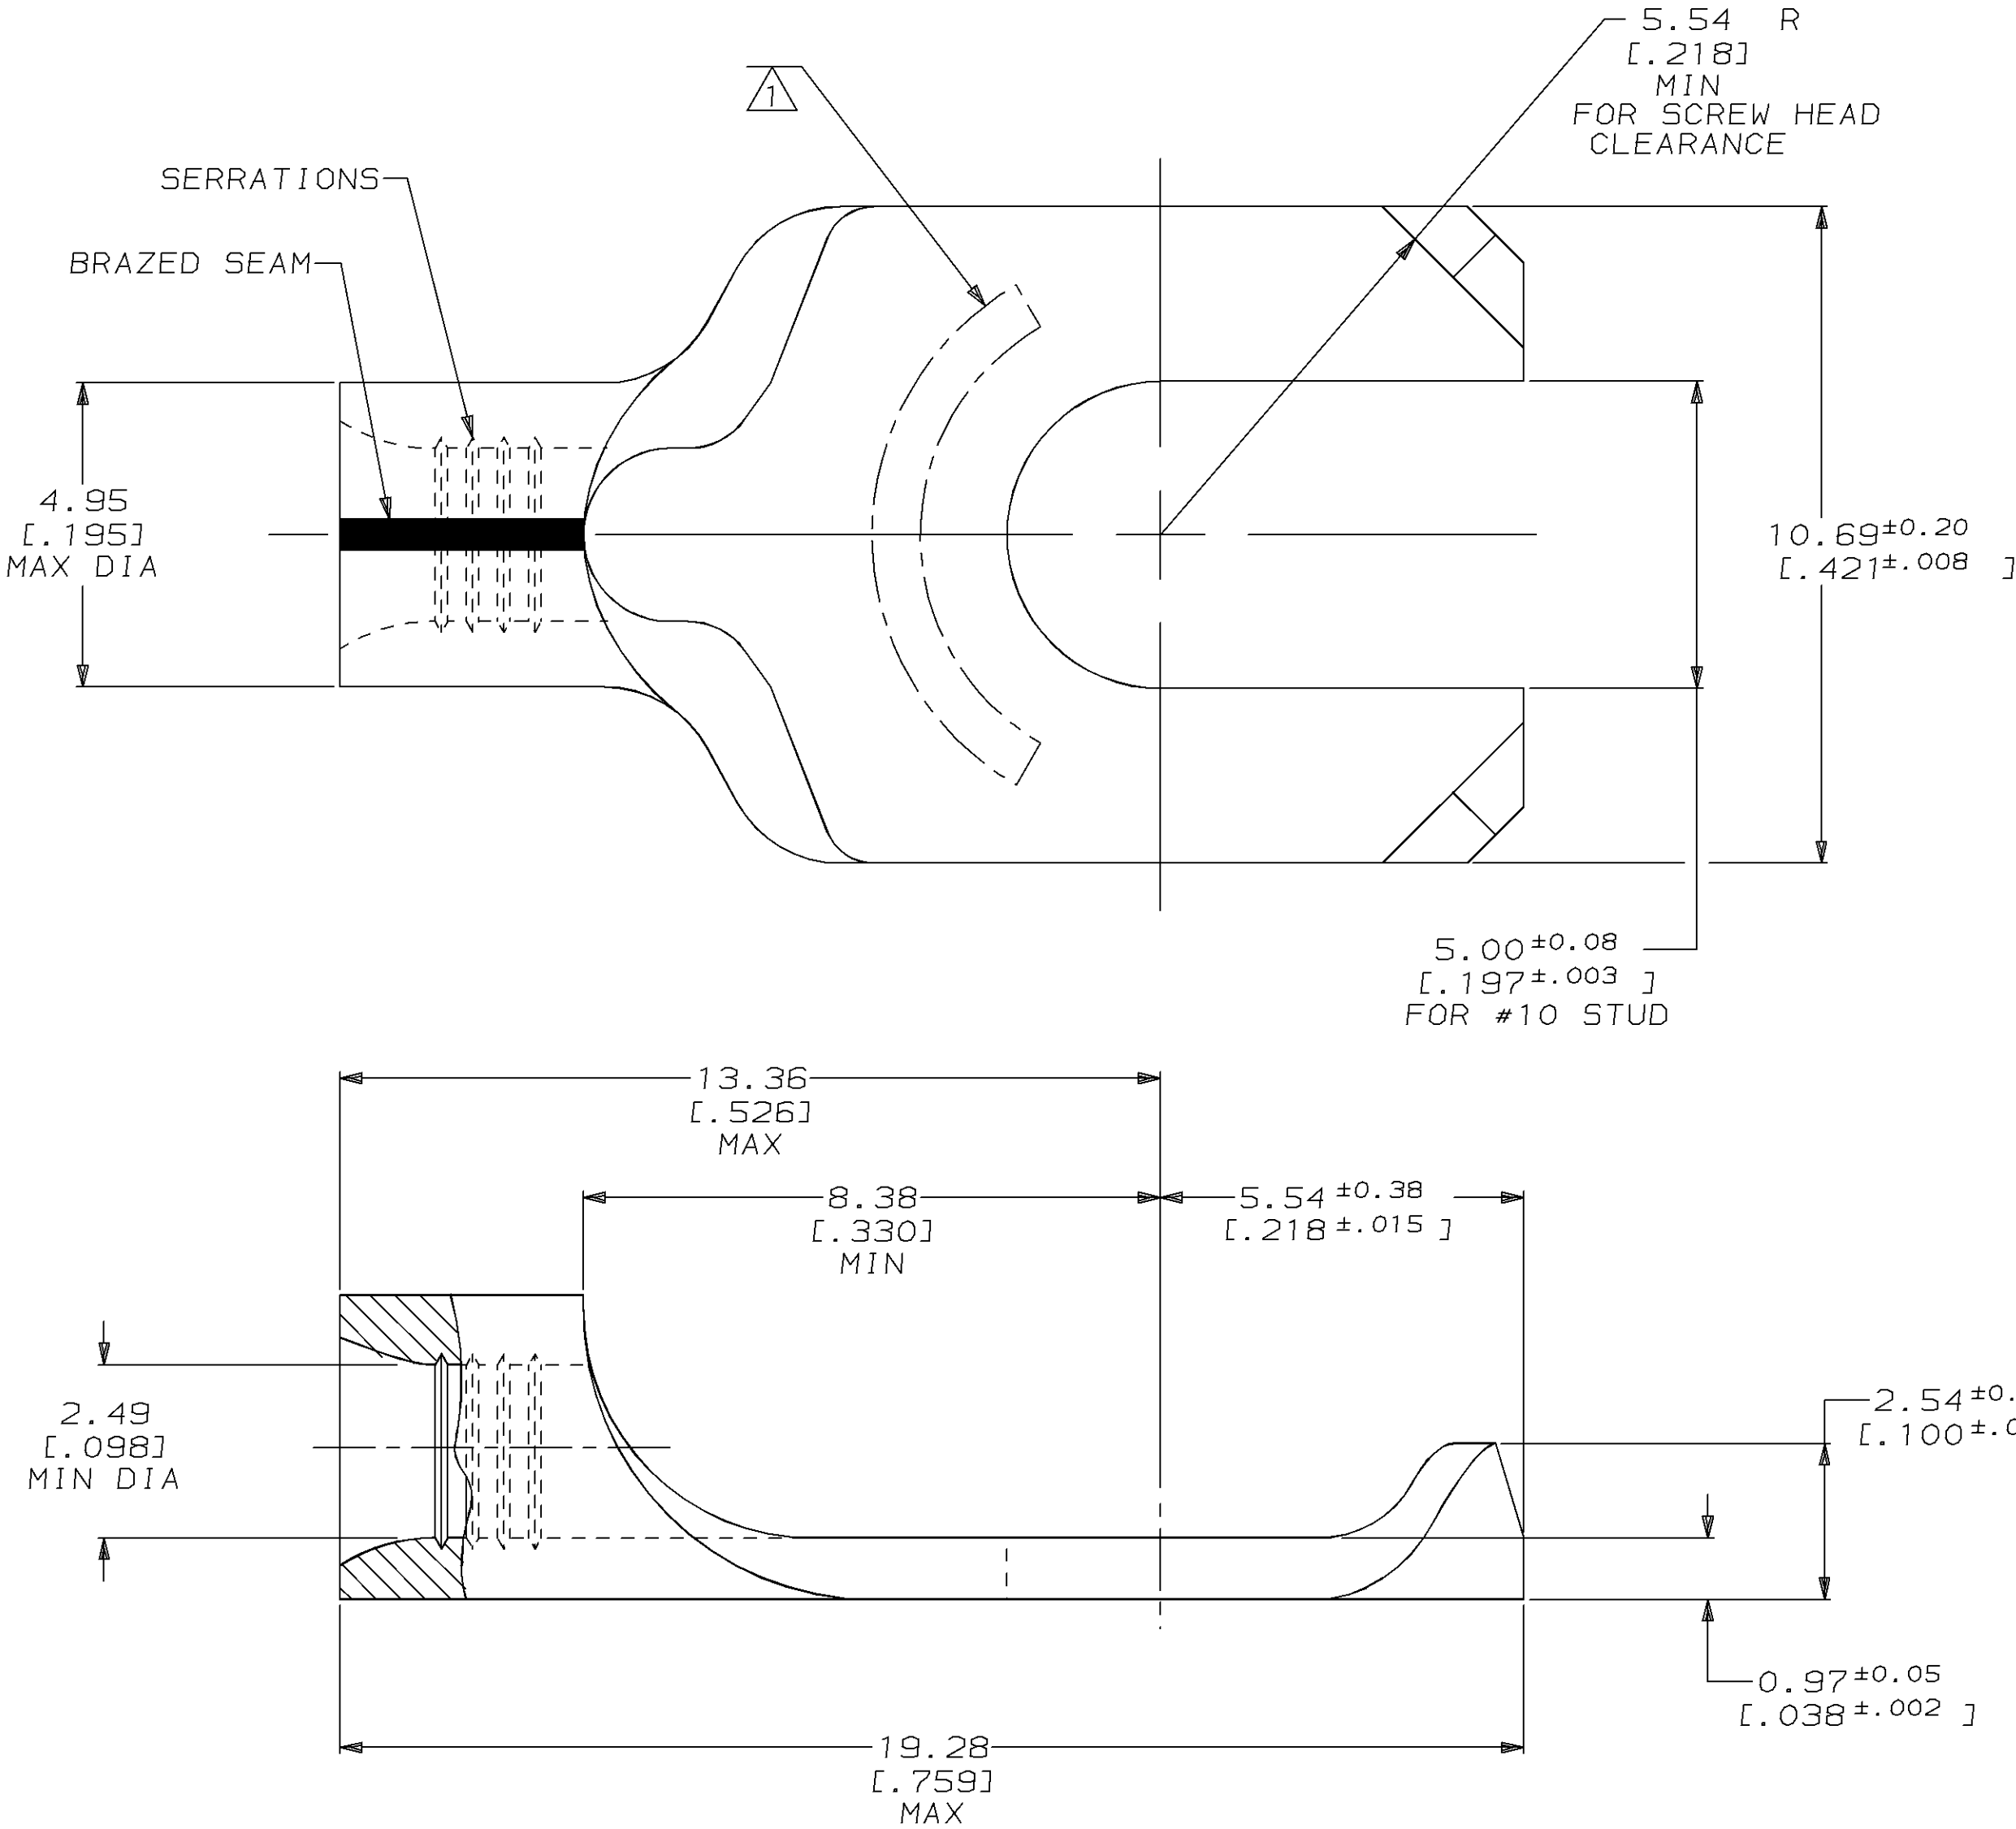

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

FOR APPLICATION
TOOLING INFORMATION

FOR ORDER ENTRY

PRODUCT INFORMATION CENTER
1-800-522-6752

TOOLING ASSISTANCE CENTER
1-800-722-1111

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
1.65-4.17mm² [3,260-8,230] CIR MILS
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON:
2 PLC DEC ± 0.20 [.008]
3 PLC DEC ± -
ANGLES ± -
MATERIAL
COPPER PER ASTM B-152
ANNEALED
FINISH
TIN PLATE
0.00254 [.000100] MIN
THK PER MIL-T-10727

DR 03MAY94
DK SCHRUM
CHK 05AUG94
DA PATTERSON
APPD 05AUG94
CH KULYNYCH
APPD 05AUG94
JL MECKLEY
PRODUCT SPEC
-
APPLICATION SPEC
-
WEIGHT -

OBSOLETE	ON TAPE	1-34489-0
-	LOOSE PIECE	34489
QTY	PACKAGE TYPE	PART NO
AMP AMP Incorporated Harrisburg, PA 17105-3608		
NAME TERMINAL, SPADE TONGUE, CORNER FLANGED, SOLISTRAND™		
SIZE	CAGE CODE	DRAWING NO
C	00779	C=34489
SCALE	10:1	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[34489](#)