

© 1970 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP
PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

204938-3

- 1. SAME AS -1 EXCEPT:
G-45204 OVER NICKEL
PER QQ-N-290

REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPROVED
F		REV. / ECN G-341	8-15-79	SAU
G		ADDED - 5 ECH G-737	2-2-80	ANTH
H		REV 522 PER ECN -732	12-1-82	TCH OTC
J		OBSOLETE - 5 8-6 PER ECN R-2556	12-23-86	MPH EGT
K		ECO-14-012828	15SEP14	CT

~~204938-3~~
~~204938-4~~
OBSOLETE

- 1. AS SHOWN
- 1. SAME AS -3 EXCEPT
2. MOUNTED ON MYLAR
TAPE

~~204938-5~~
OBSOLETE

- 1. SAME AS -3 EXCEPT:
2. GRAPHITE COATED.
3. NO COLOR BANDS.

~~204938-6~~
OBSOLETE

- 1. SAME AS -3 EXCEPT:
2. COLOR CODE TO BE
SINGLE GREEN BAND.

WHEN ORDERING CONTACT ON TAPE, ORDER BY THE TAPE
NUMBER PLUS THE PACKAGING CODE AS FOLLOWS:

- 1. FOR USE WITH AMP TAPETRONIC, PNEUMATIC TOOL -
A. 1000 PARTS TO A BOX ADD PACKAGING CODE: IMBOX
- 2. FOR USE WITH 4/8 INDENT STRIPPER CRIMPER -
A. 1000 PARTS TO A REEL ADD PACKAGING CODE: 1MREEL
B. 5000 PARTS TO A REEL ADD PACKAGING CODE: 5MREEL

.033 DIA.
.025 ONE WALL ONLY

.033
.029

.143 ± .003

.046 DIA.
.043 DIA.

.058
.052

.068 DIA.
.065 DIA.

BIN CODE -
YELLOW
NO. 145
GREEN

45° ± 5°

32

.041 DIA.
.039 DIA.

.072 DIA.
.069 DIA.


.084 DIA.
.082 DIA.

.020
.005
FLAT

POINT OF
PLATING
THICKNESS
MEASUREMENT

.591
.586 (B)

.780 REF.

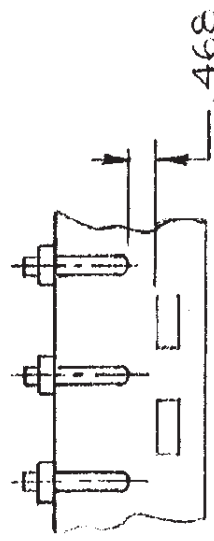

TAPE MTD. ASSY.
(-4 ONLY)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMALS ± .005 ANGLES 2°		CONTRACT NO.	AMP INCORPORATED HARRISBURG, PENNSYLVANIA
MATERIAL LEADED COPPER FINISH: GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290		DR. <i>L. Morington</i> 7-20-70 APPD. <i>W. J. Smith</i> 9-24-70 APPD. <i>W. J. Smith</i> 9-24-70 DESIGN APPD. <i>W. J. Smith</i> 9-24-70 OTHER APPD.	NAME SUB 20 CONTACT PIN TYPE XVII - RM
SCALE 10-1		SIZE B	NUMBER 204938
SHEET 1 OF 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[204938-3](#)