


2mm

# LED CBI® Circuit Board Indicator (DIN 41494 Compatible), Bi-Level



571-01xx

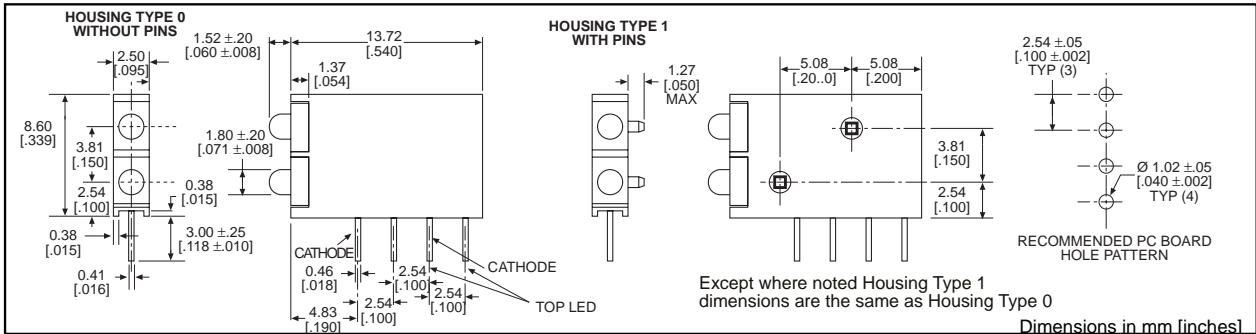


### Features

- Designed to accommodate DIN 41494
- Multiple CBIs form horizontal LED arrays on 2.54mm (0.100") center-lines
- High Contrast, UL 94 V-0 rated, black housing
- Oxygen index: 32%
- Polymer content: PBT, 0.290 g
- Housing stand-offs facilitate PCB cleaning
- Solderability per MIL-STD-202F, method 208F
- LEDs are safe for direct viewing per IEC 825-1, EN-60825-1

### Tolerance note: As noted, otherwise:

- LED Protrusion: ±0.04 mm [±0.016]
- CBI Housing: ±0.02mm[±0.008]

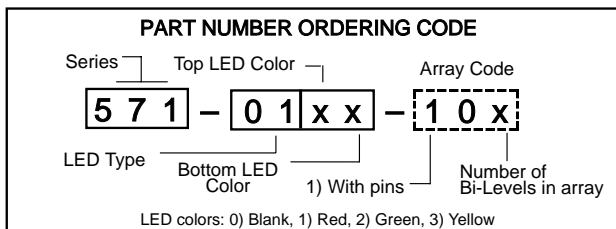

-10x Suffix required only when ordering single units with pins or arrays

### PART NO. WITHOUT PINS

### COLOR\*

- |          |               |
|----------|---------------|
| 571-0111 | Red-Red       |
| 571-0112 | Red-Green     |
| 571-0122 | Green-Green   |
| 571-0132 | Yellow-Green  |
| 571-0133 | Yellow-Yellow |

\* Top-Bottom LED

### PART NO. WITH PINS

### COLOR\*


- |              |               |
|--------------|---------------|
| 571-0111-100 | Red-Red       |
| 571-0112-100 | Red-Green     |
| 571-0122-100 | Green-Green   |
| 571-0132-100 | Yellow-Green  |
| 571-0133-100 | Yellow-Yellow |

\* Top-Bottom LED

Arrays available. See Part Number ordering code.

### Custom Combinations

- Contact factory for information on custom color combinations.

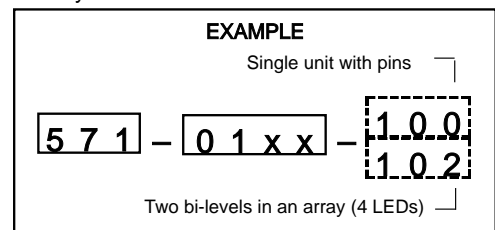

### Typical Operating Characteristics (T<sub>A</sub> = 25°C)

See LED data sheet for additional information

### GENERAL PURPOSE

See Page 3-17 and 3-18 for Reference Only LED Drive Circuit Examples

See Page 3-20 for Pin Out


Part Number	Color	Peak Wavelength nm	I <sub>v</sub> * mcd	V <sub>F</sub> ** Volts	Viewing Angle 2Θ <sub>1/2</sub>	LED Data sheet	Page #
571-01xx	Red	635	12.6	2	38°	521-9630	3-13
	Green	565	8.7	2.1	38°	521-9632	3-13
	Yellow	585	12.6	2.1	38°	521-9631	3-13

\* I<sub>F</sub> = 10mA \*\* I<sub>F</sub> = 20mA

# 2mm Discrete LED Diffused

# Dialight

## 521-9630, -9631, -9632

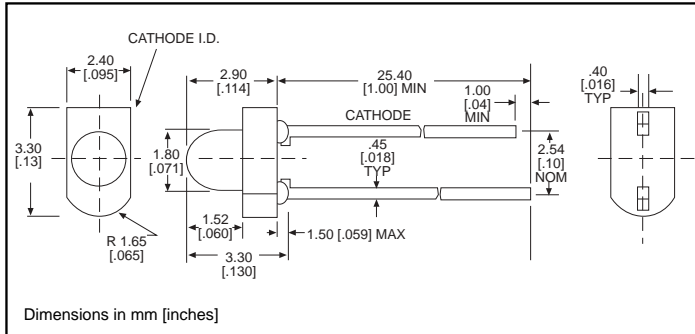

PART NO.	COLOR
521-9630	Red
521-9631	Yellow
521-9632	Green

3

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

	Red -9630	Yellow -9631	Green -9632
Power Dissipation (mW)	100	60	100
Forward Current (mA)	30	20	30
Derating (mA/°C) From 25°C	.4	.25	.4
Peak Current (mA) Pulse width = 10μs	120	80	120
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

### OPERATING CHARACTERISTICS (T<sub>A</sub>=25°C)

		Red -9630	Yellow -9631	Green -9632
Luminous Intensity (mcd)	Min.	3.7	3.7	2.5
	Typical	12.6	12.6	8.7
Peak Wavelength (nm) λ <sub>Peak</sub>	Typical	635	585	565
Viewing Angle (2θ <sub>1/2</sub> )	Typical	38°	38°	38°
Forward Voltage (V) I <sub>F</sub> =20mA	Typical	2	2.1	2.1
	Max.	2.8	2.8	2.8
Reverse Voltage (V), I <sub>R</sub> =100μA	Min.	5	5	5

θ<sub>1/2</sub> is the off axis angle at which the luminous intensity is half the axial luminous intensity

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[571-0111F](#) [571-0133F](#)