


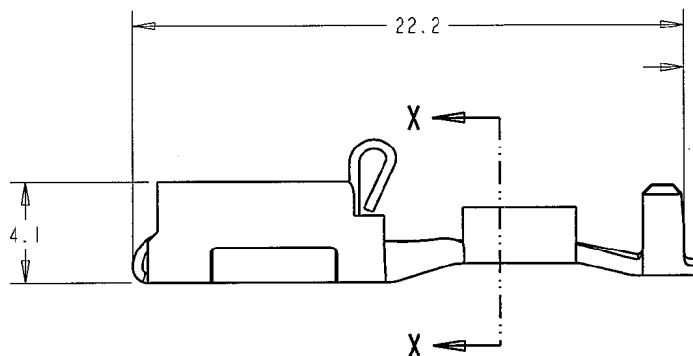

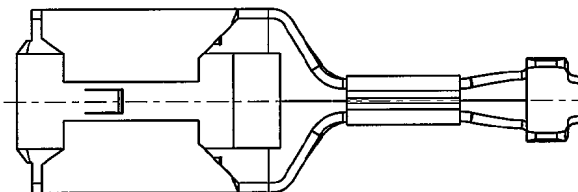
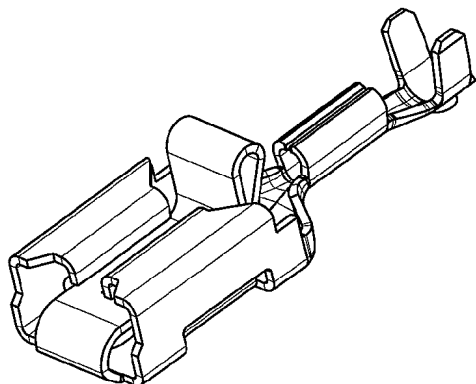


| P  | LYR | DESCRIPTION                        | DATE      | DWN | APVD |
|----|-----|------------------------------------|-----------|-----|------|
| A  |     | RELEASE FOR PRODUCTION             | 18-04-00  | AJB | -    |
| A1 |     | WIRE & INSULATION RANGE INFO ADDED | 15FEB2012 | PKS | RRP  |

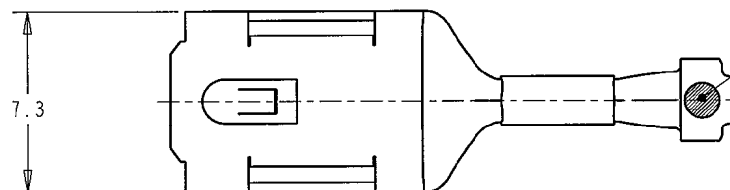

SECTION X-X



RED TINTALITE INK,  
DOT MARKED IN APPROX.  
POSITION SHOWN

1. BRASS, GOLD PLATED ALL OVER  
TO DEF STD. 03-17  
HARD GOLD 2.5μm  
MINIMUM, OVER COPPER  
2.5μm MIN


2. PACK SIZE : 500/BOX

3. WIRE RANGE : 0.3-0.81 sq.mm (22-18 AWG)  
INSULATION RANGE : 1.1-2.5 mm DIA. (.045"- .100" DIA.)

4. NET WEIGHT : 1.02g

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.  
IT IS SUBJECT TO CHANGE, AND THE CONTROLLING ENGINEERING  
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS IN  
m.m



THIRD ANGLE PROJECTION

MATERIAL

SEE NOTE

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

LINEAR: - ±0.5

ANGULAR: - ±1°

FINISH

SEE NOTE

DWN  
A. J. BEKEN 18-Apr-00

CHK  
R. GOODALE 18-Apr-00

APVD  
FCW 18-Apr-00

PRODUCT SPEC

108-3017

APPLICATION SPEC

114-2153

WEIGHT

-

CUSTOMER DRAWING

1337265-1

PART NUMBER

**STE**

TE Connectivity

POSITIVE LOCK RECEPTACLE .250 SERIES  
FOR 0.8 TAB, GOLD PLATED, LOOSE PIECE

SIZE

A3

CAGE CODE

00779

DRAWING NO

©-1337265

SCALE

5:1

SHEET

OF

REV

A1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1337265-1](#)