

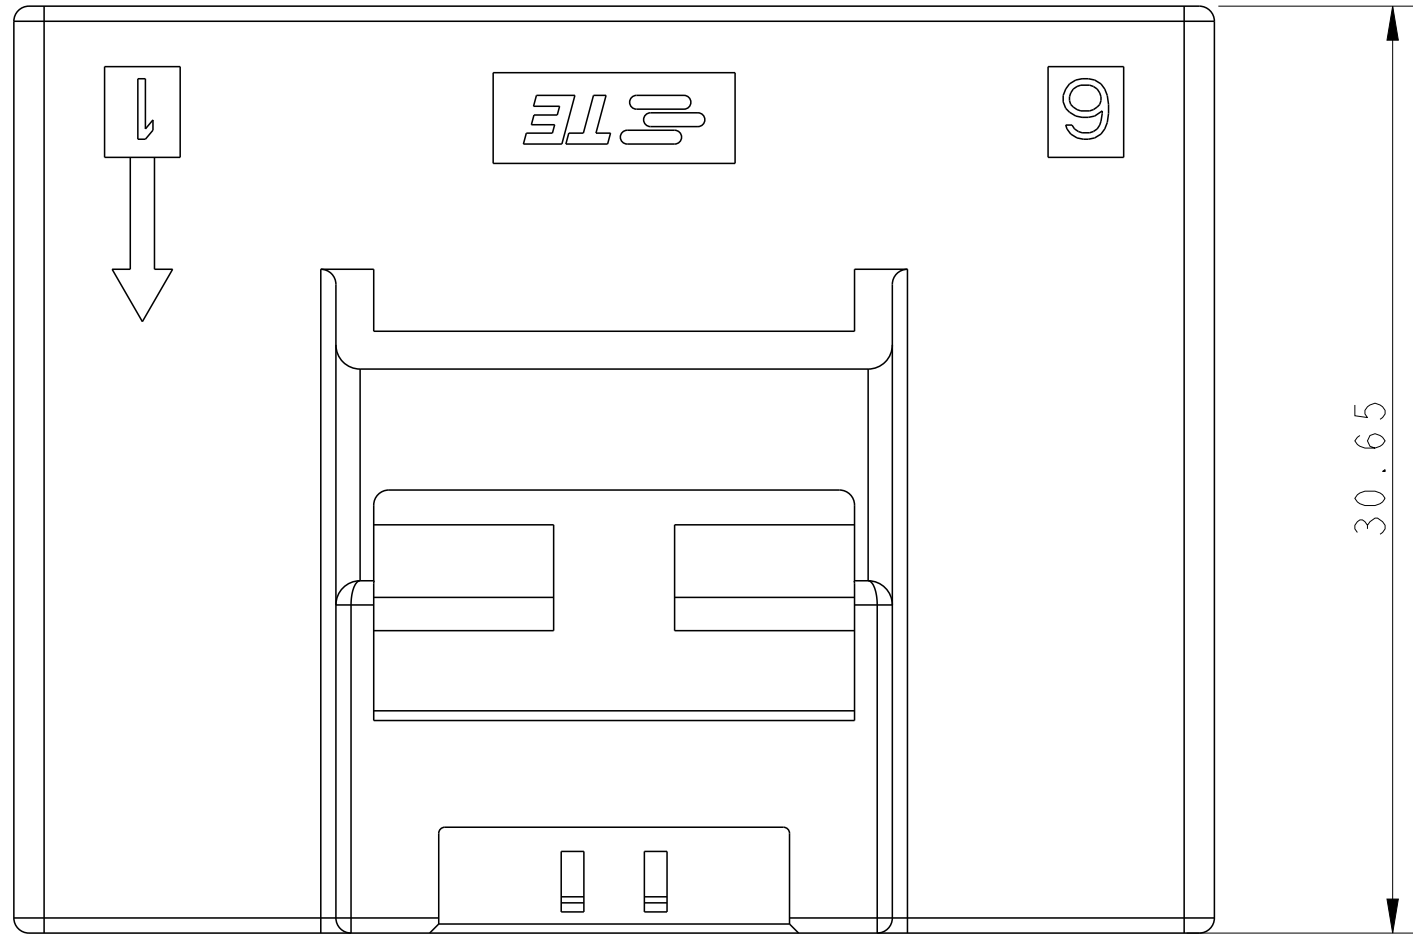
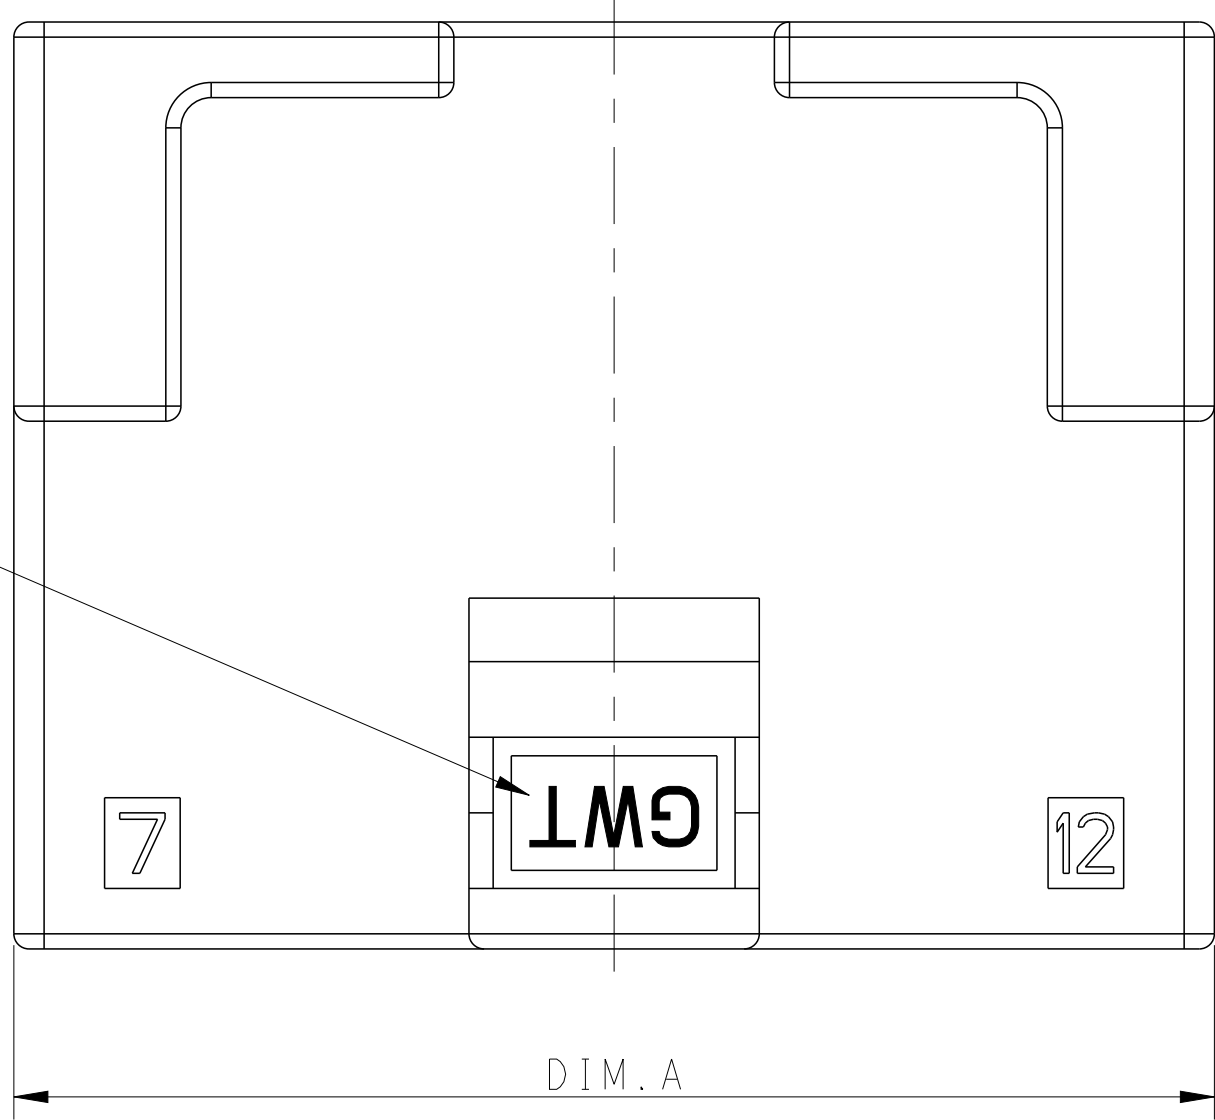
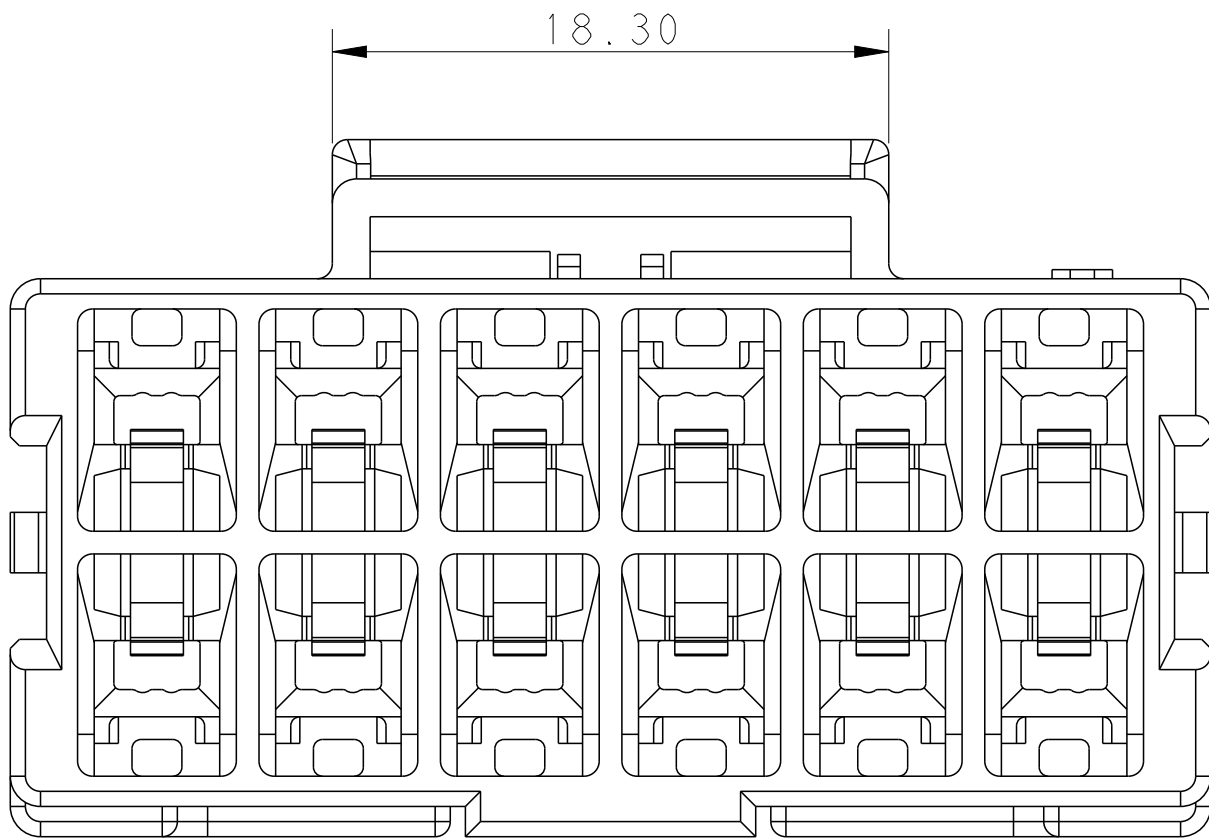


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
		B			18JUL2016	BW	GJ	

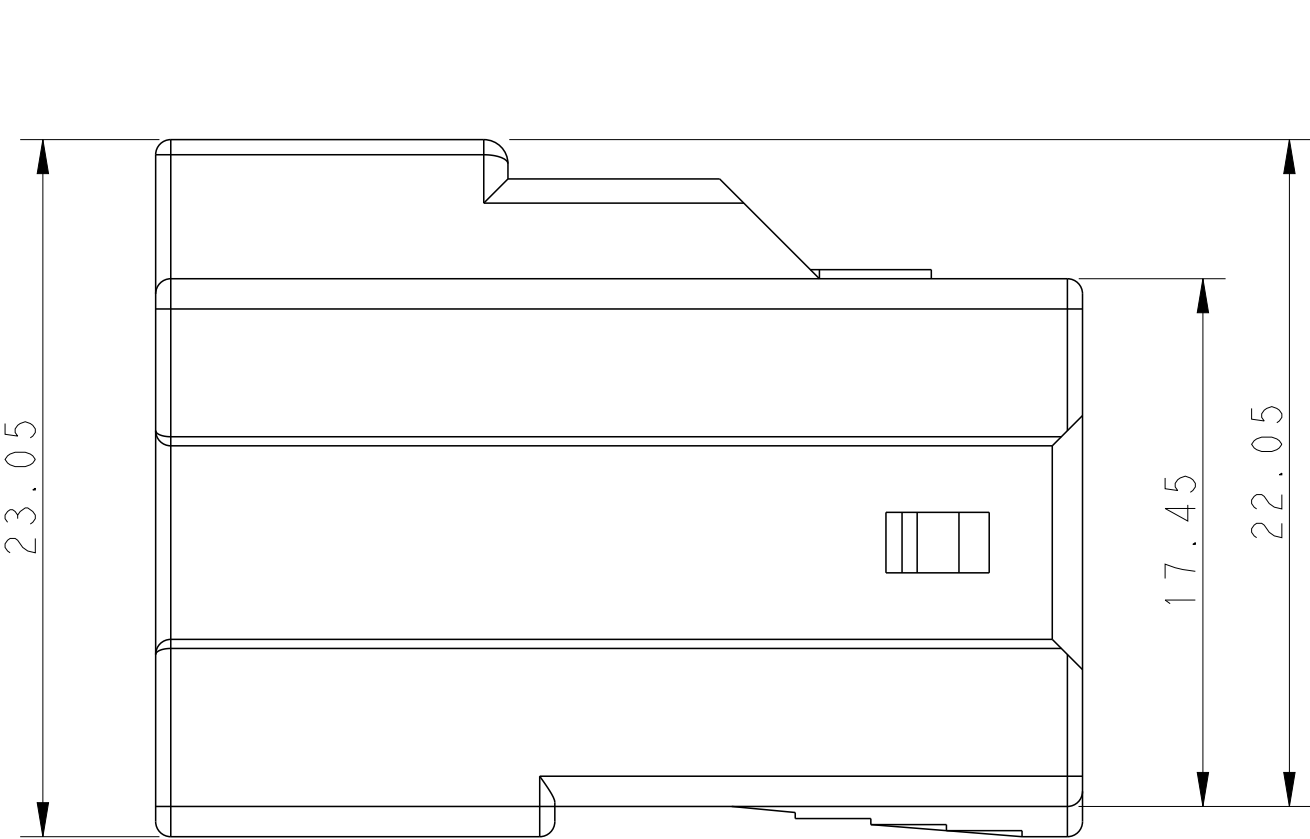

POS.	DIM. A	DIM. B
2*6	39.70	37.30
2*5	33.70	31.30
2*4	27.70	25.30
2*3	21.70	19.30

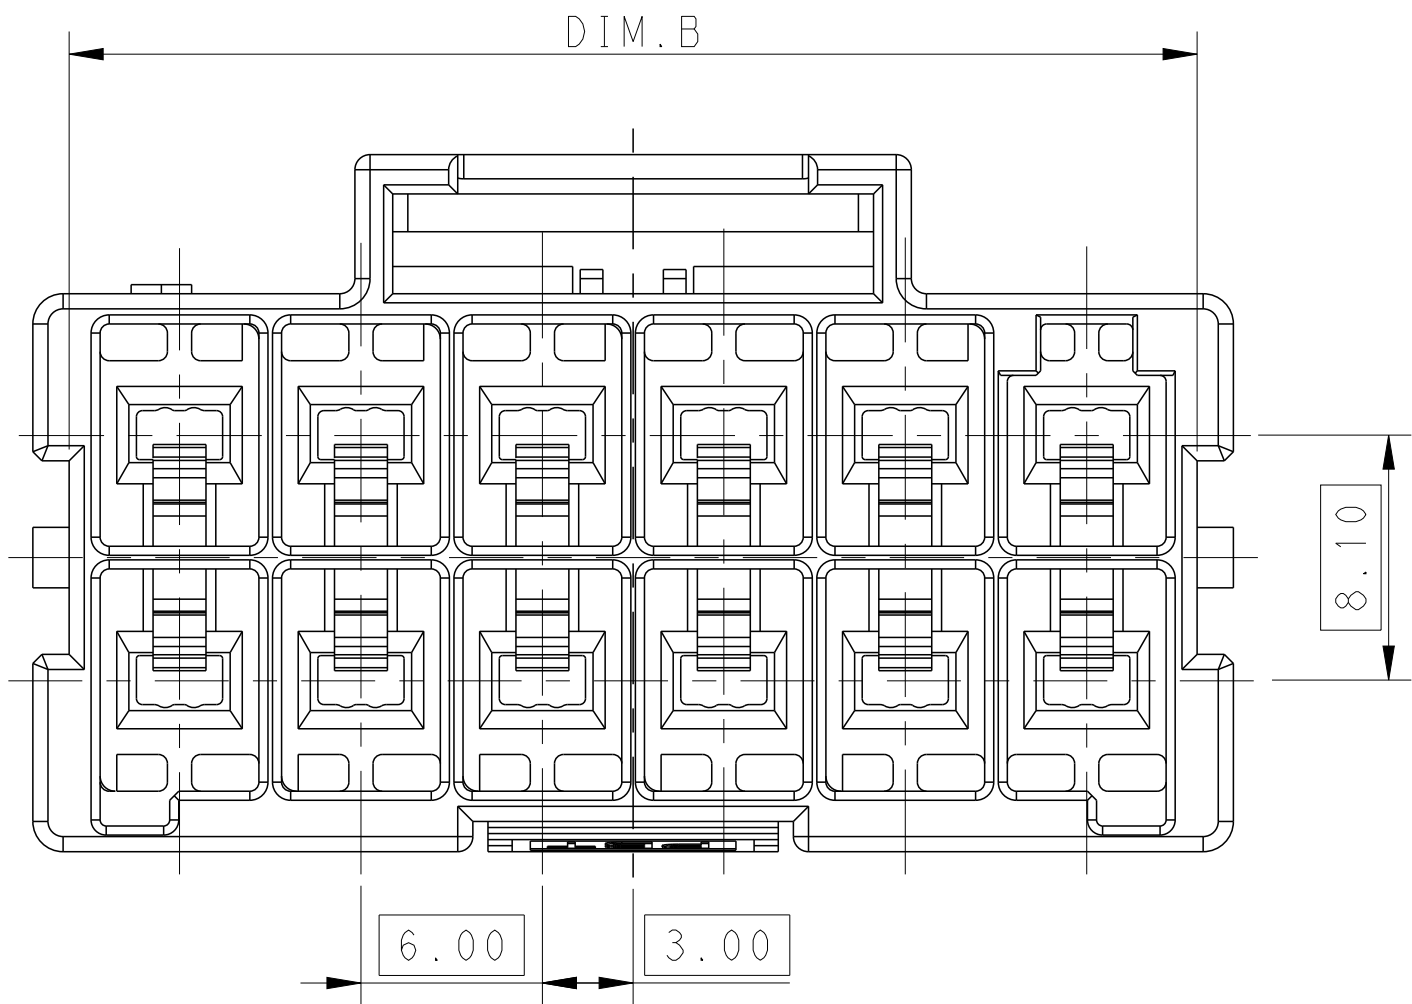

NOTE

1. MATERIAL:

LEVEL A: PA6 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0

LEVEL B: PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2. MATERIAL MARK:

LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N

TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

4. MATING CONN, P/N


PLUG HSG: *-2232266-*

TPA (LOCK PLATE): *-1971778-*


5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU	26MAR2013	TE TE Connectivity			
		CHK	HAPYE WU	26MAR2013				
DIMENSIONS:		APVD	YUHONG MAO	26MAR2013	NAME			
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:			CAP HOUSING,FREE HANGING,DOUBLE ROW			
		0 PLC ±-			POWER TRIPLE LOCK			
		1 PLC ±0.35			-			
		2 PLC ±0.25			SIZE			
		3 PLC ±-			CAGE CODE			
		4 PLC ±-			DRAWING NO			
		ANGLES ±-			RESTRICTED TO			
		FINISH ±-			A100779			
MATERIAL		-			C=2232359			
		-			Customer Drawing			
					SCALE			
					SHEET 1 OF 2			
					REV B			


LOC		DIST		REVISONS			
P	LYR	DESCRIPTION			DATE	OWN	APVD
-	-	SEE SHEET 1			-	-	-

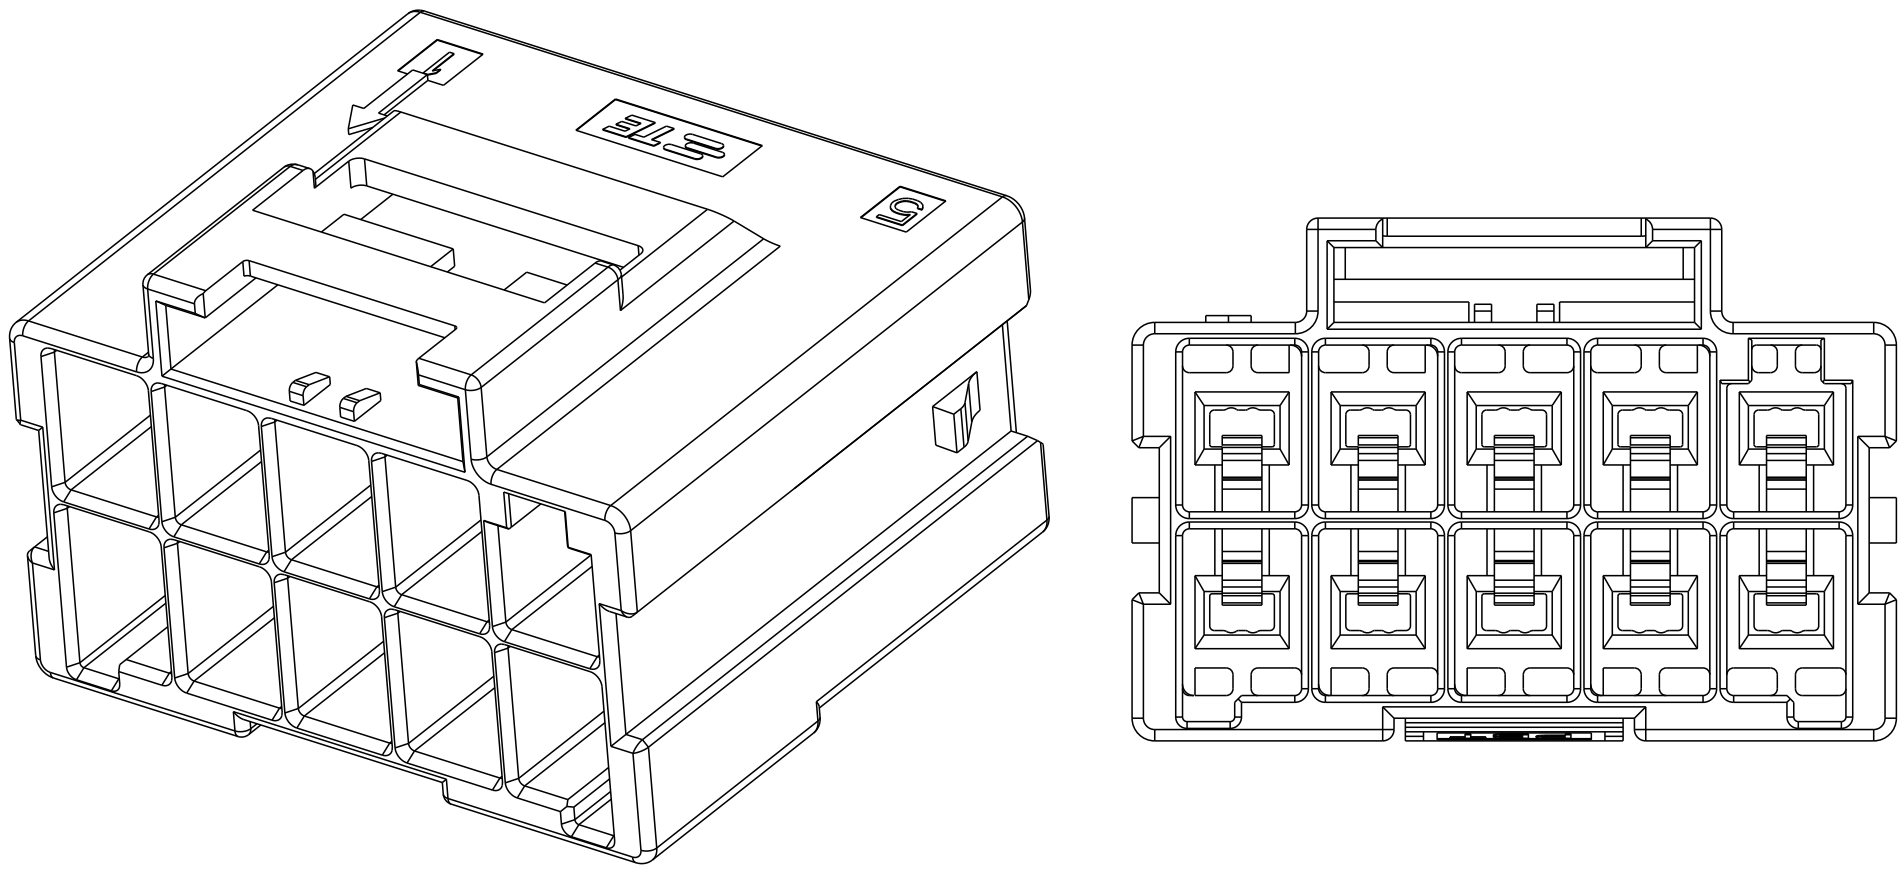


2*5 POSITIONS

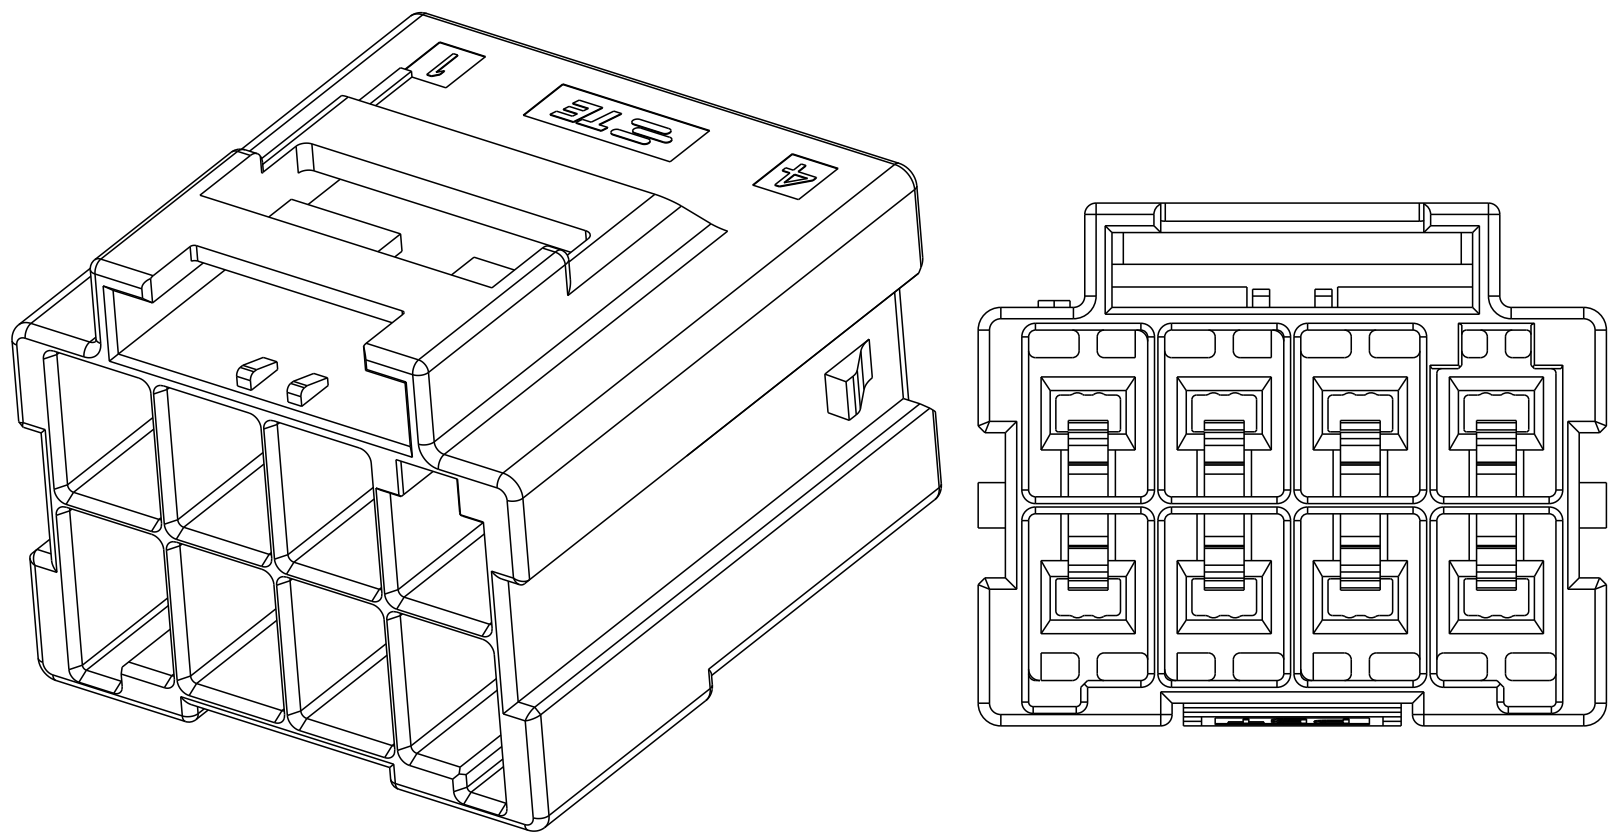


2*4 POSITIONS

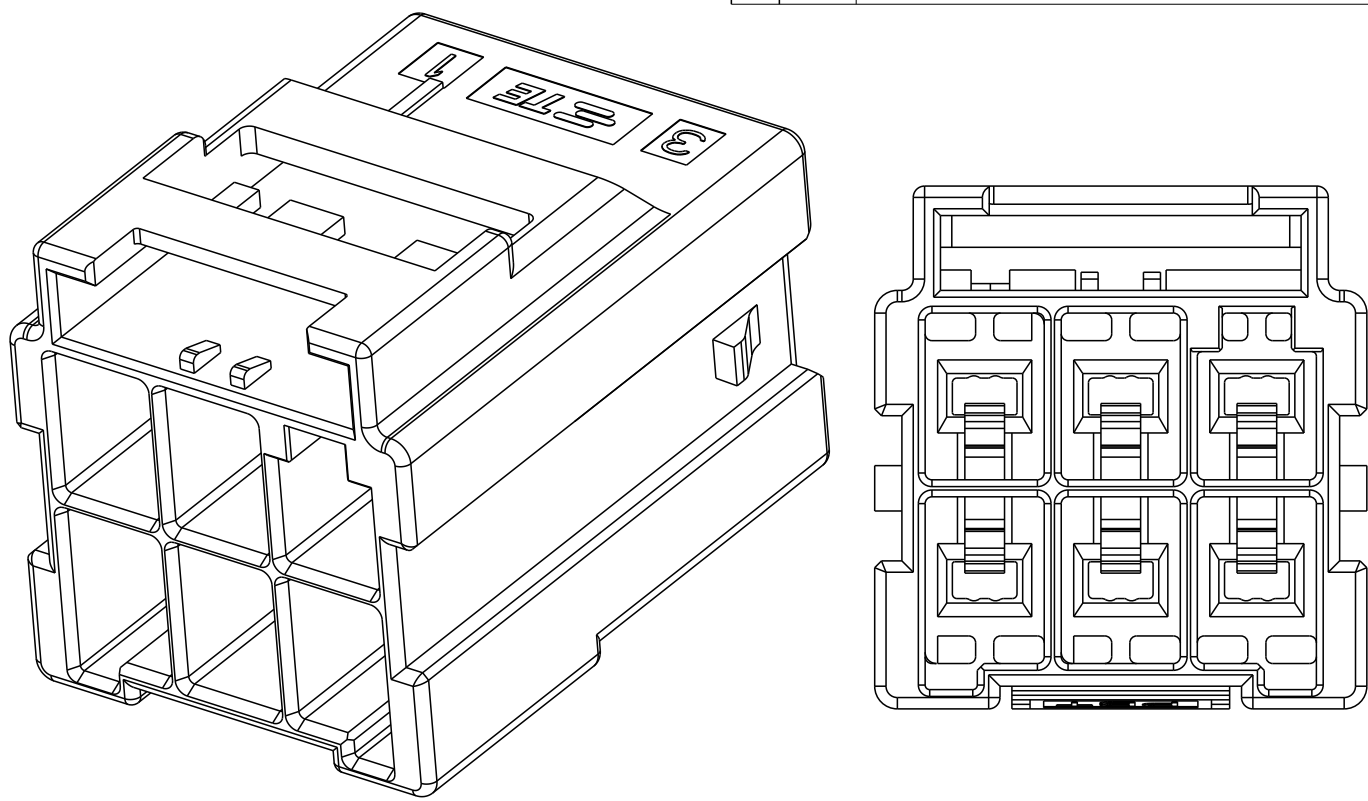


2*3 POSITIONS

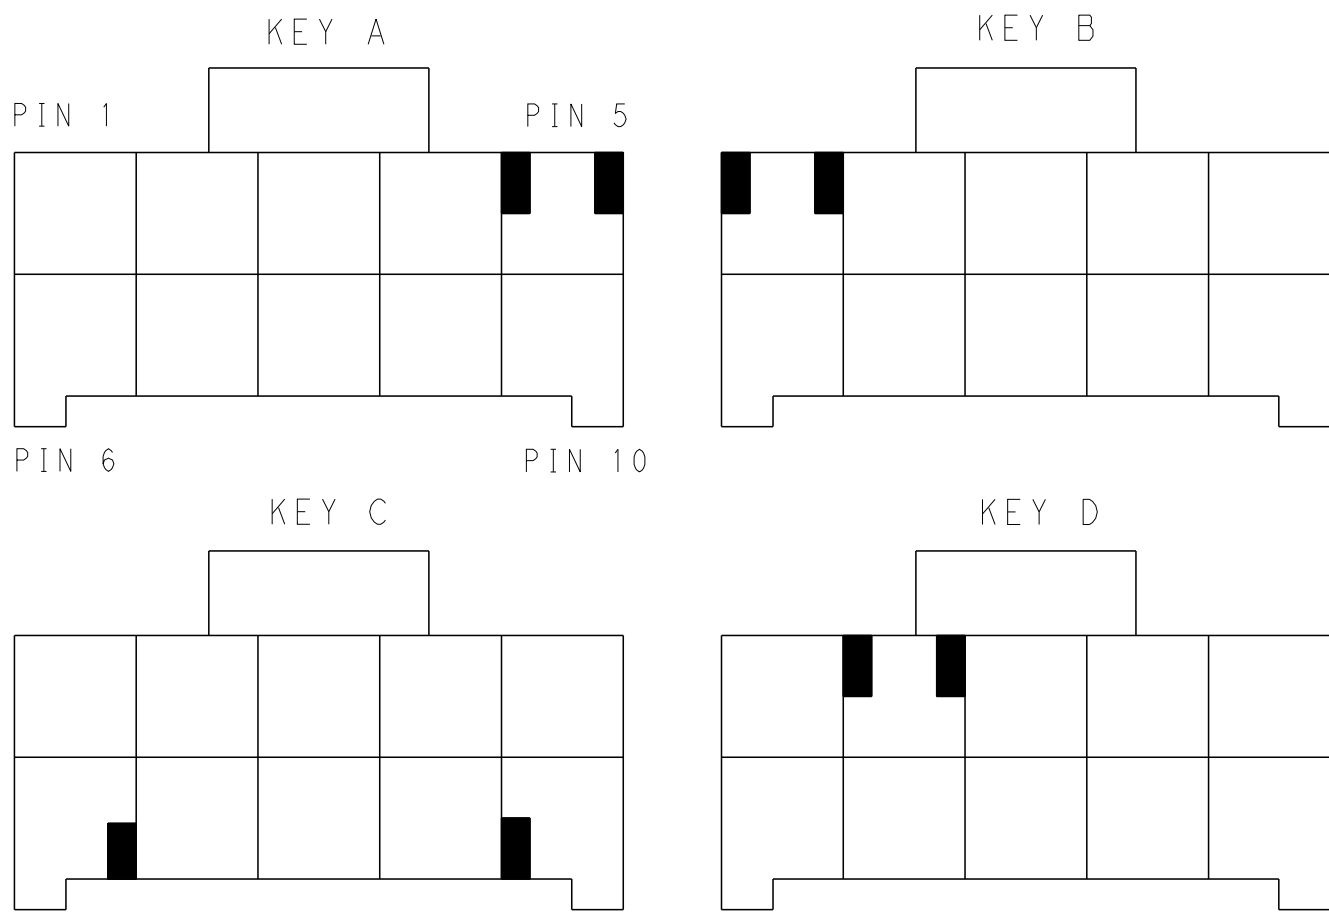


KEYING FOR 2*5 POS.

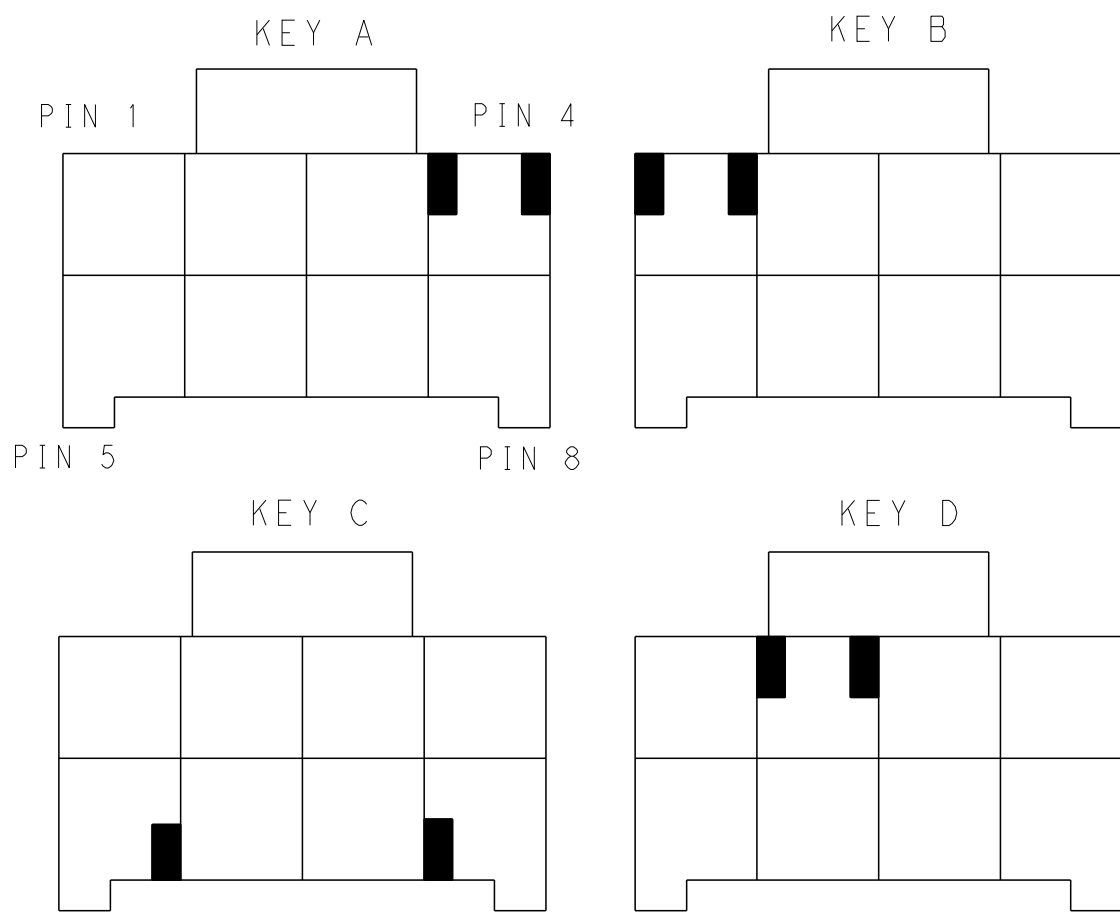


KEYING FOR 2*4 POS.

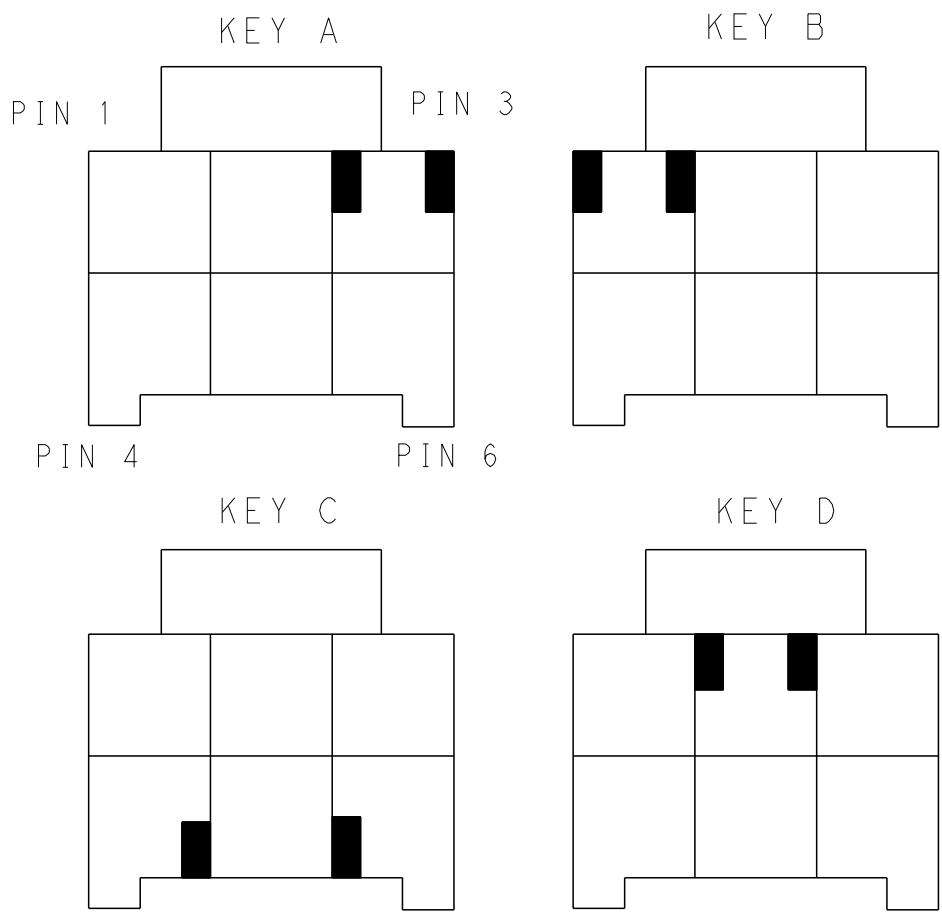

KEYING FOR 2*3 POS.

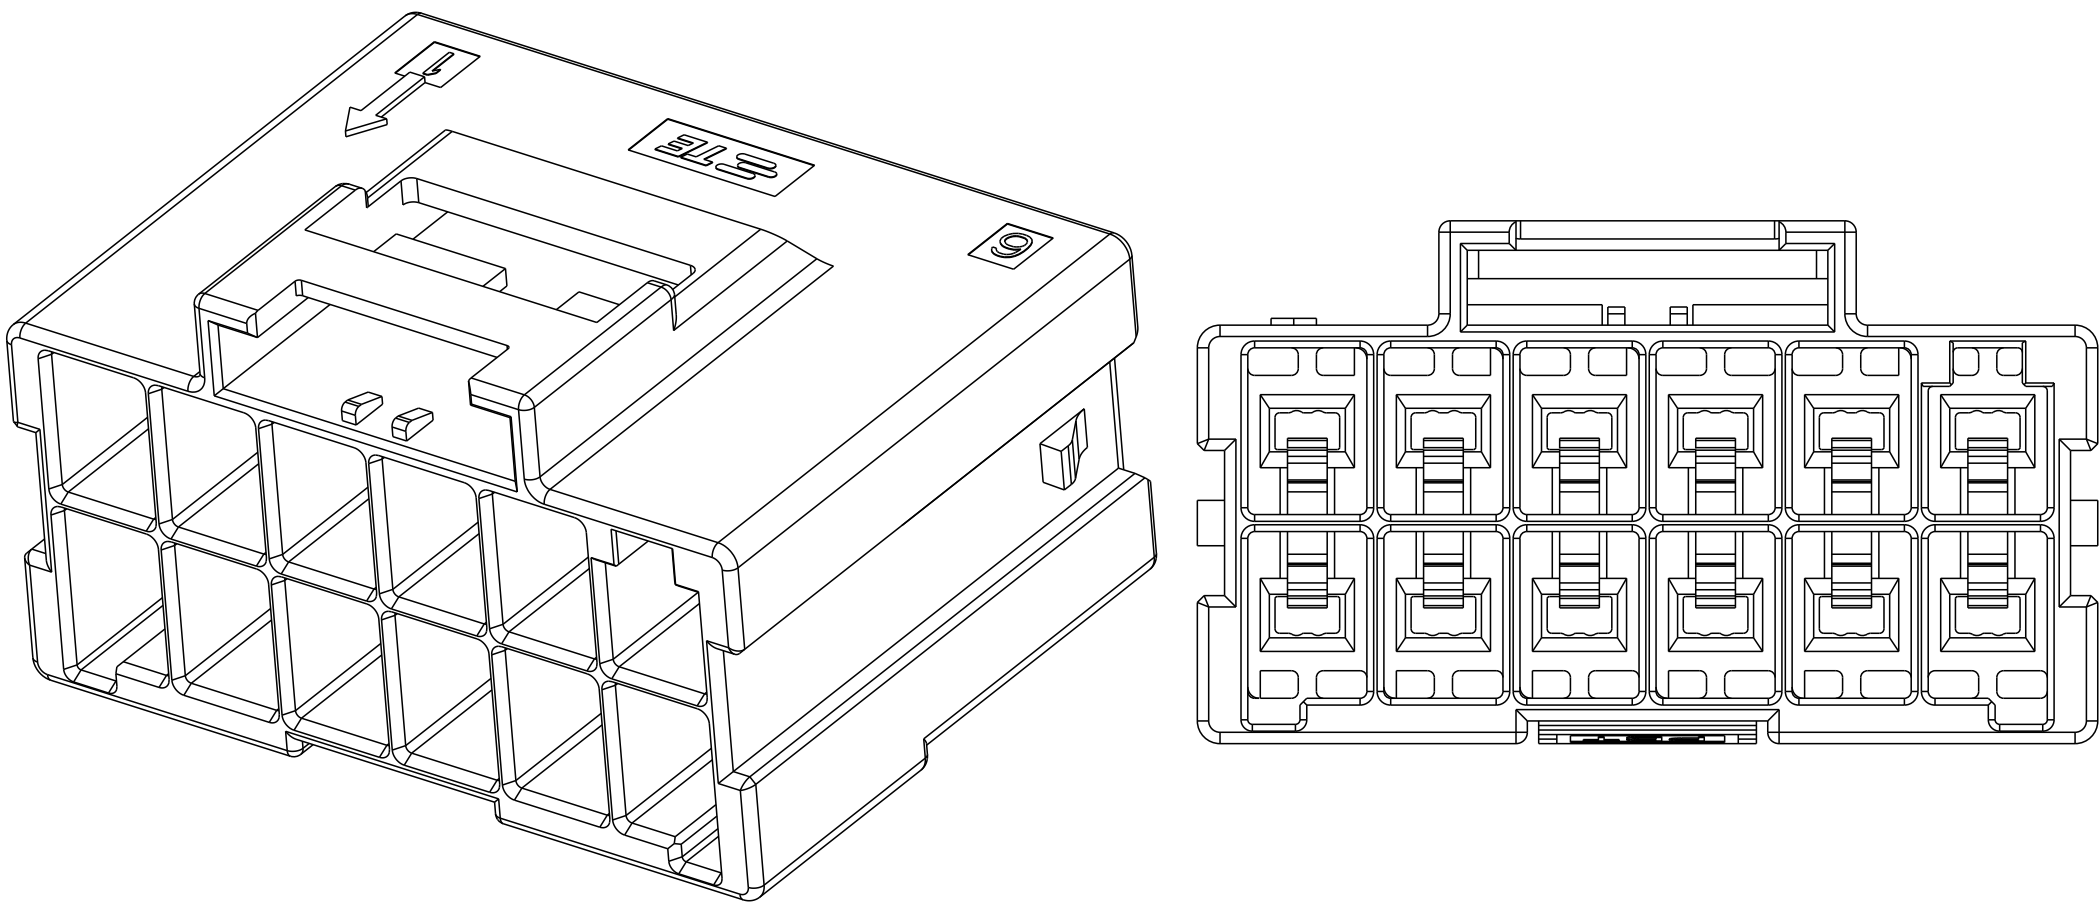

2*6 POSITIONS

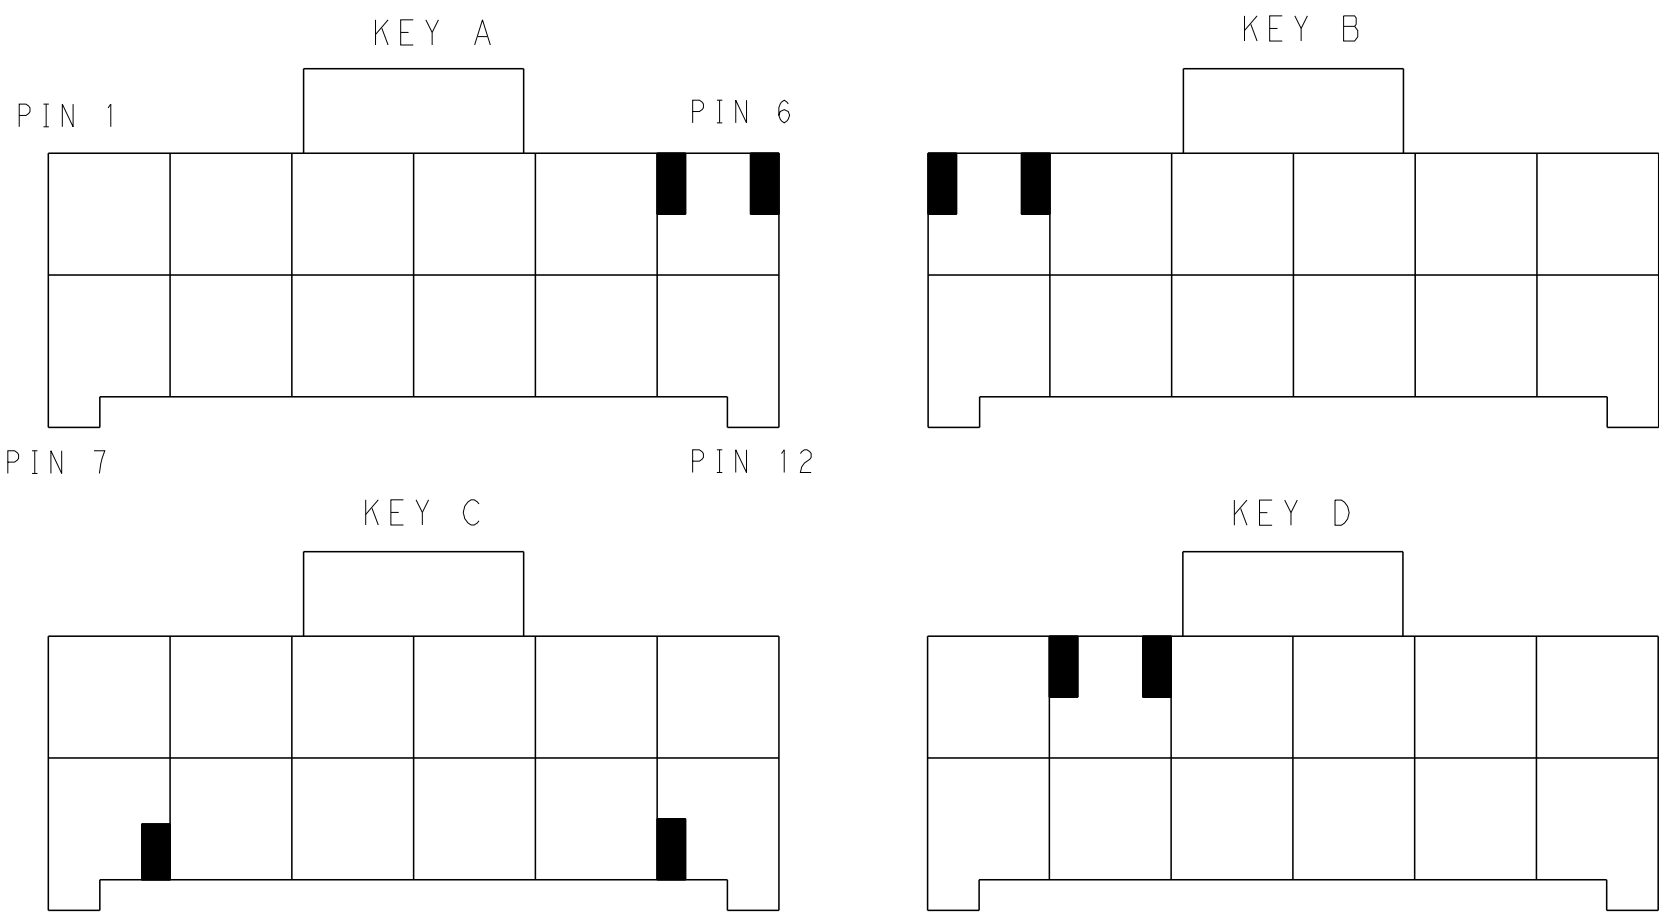

KEYING FOR 2*6 POS.

2*4	LEVEL A	DARK GREY	KEY A	5-2232359-4	2*6	LEVEL A	DARK GREY	KEY A	5-2232359-6
		BROWN	KEY B	6-2232359-4			BROWN	KEY B	6-2232359-6
		GREEN	KEY C	7-2232359-4			GREEN	KEY C	7-2232359-6
		ORANGE	KEY D	8-2232359-4			ORANGE	KEY D	8-2232359-6
2*3	LEVEL A	DARK GREY	KEY A	5-2232359-3	2*5	LEVEL A	DARK GREY	KEY A	5-2232359-5
		BROWN	KEY B	6-2232359-3			BROWN	KEY B	6-2232359-5
		GREEN	KEY C	7-2232359-3			GREEN	KEY C	7-2232359-5
		ORANGE	KEY D	8-2232359-3			ORANGE	KEY D	8-2232359-5
POS.	MATERIAL	COLOR	KEY	P/N	POS.	MATERIAL	COLOR	KEY	P/N
THIS DRAWING IS A CONTROLLED DOCUMENT.					TE Connectivity				
DIMENSIONS:					CAP HOUSING, FREE HANGING, DOUBLE ROW				
mm					POWER TRIPLE LOCK				
0 PLC ±- 26MAR2013					SIZE CAGE CODE DRAWING NO				
1 PLC ±0.35					RESTRICTED TO				
2 PLC ±0.25					A100779C=2232359				
3 PLC ±-					SHEET 2 OF 2				
4 PLC ±-					REV B				
ANGLES ±-					Customer Drawing				
FINISH -					SCALE -				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-2232359-6](#)