
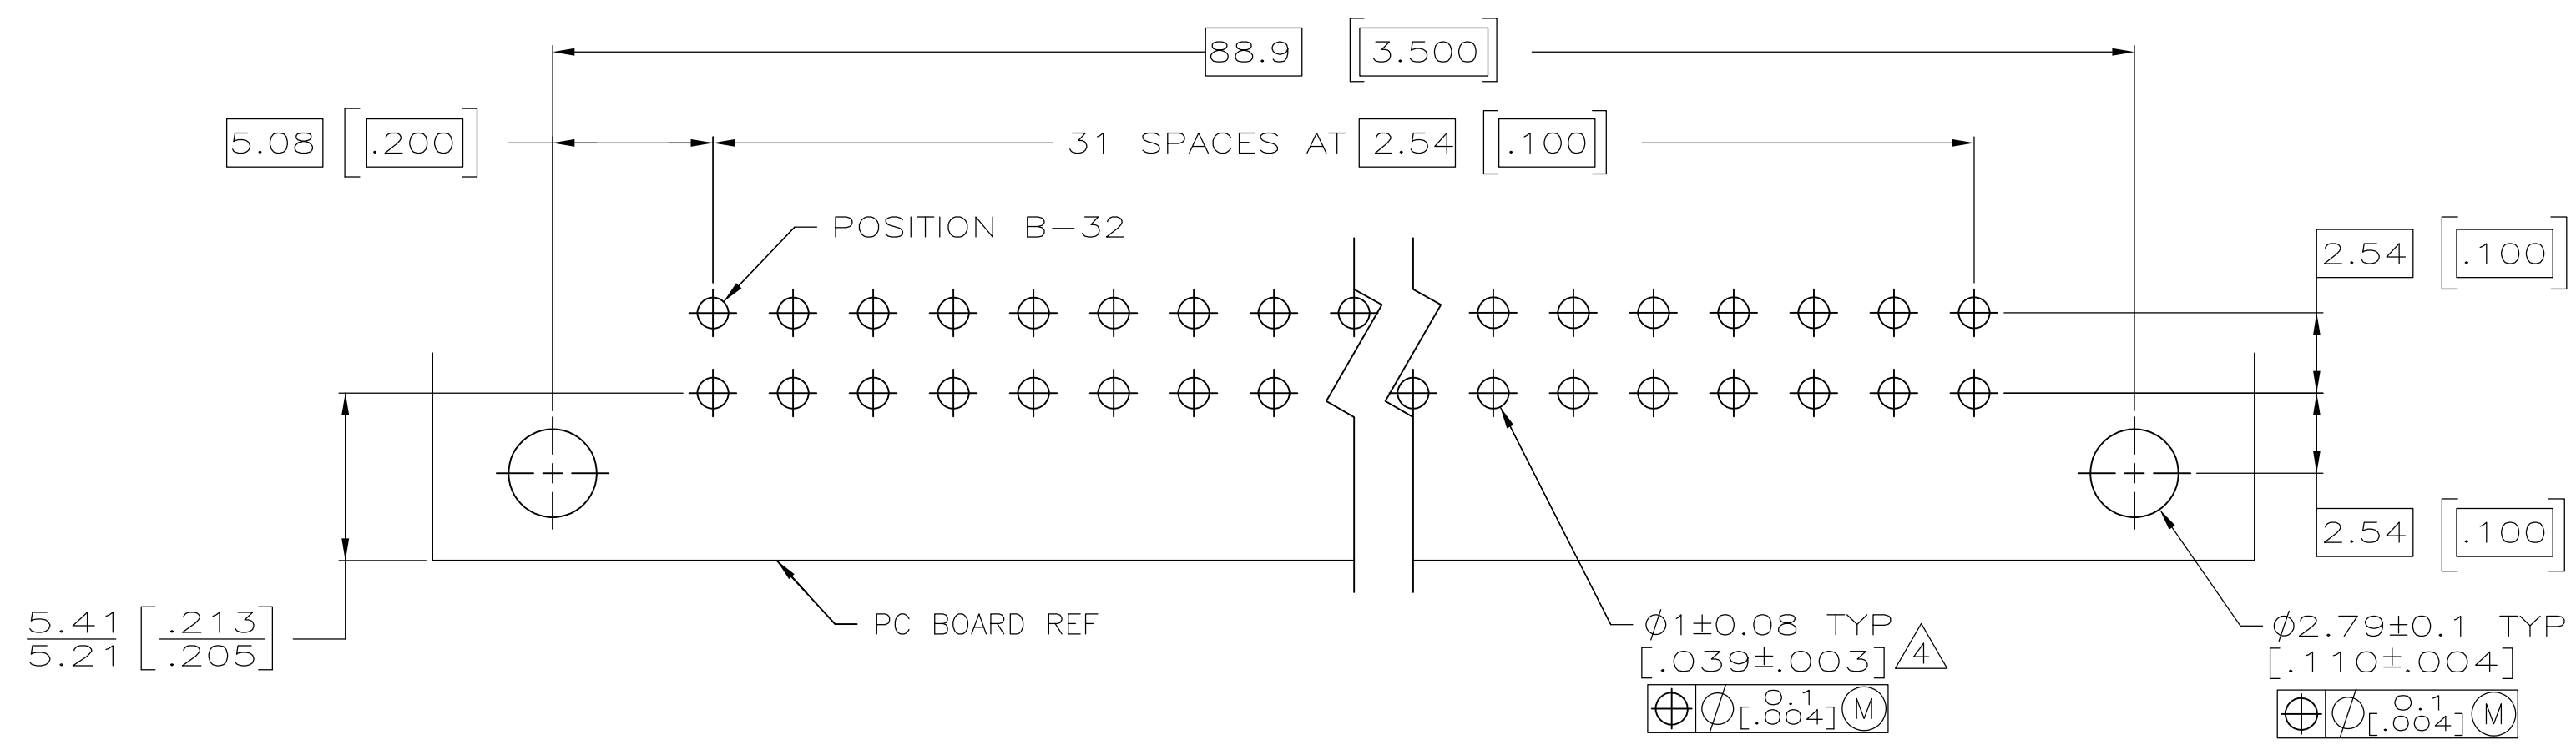
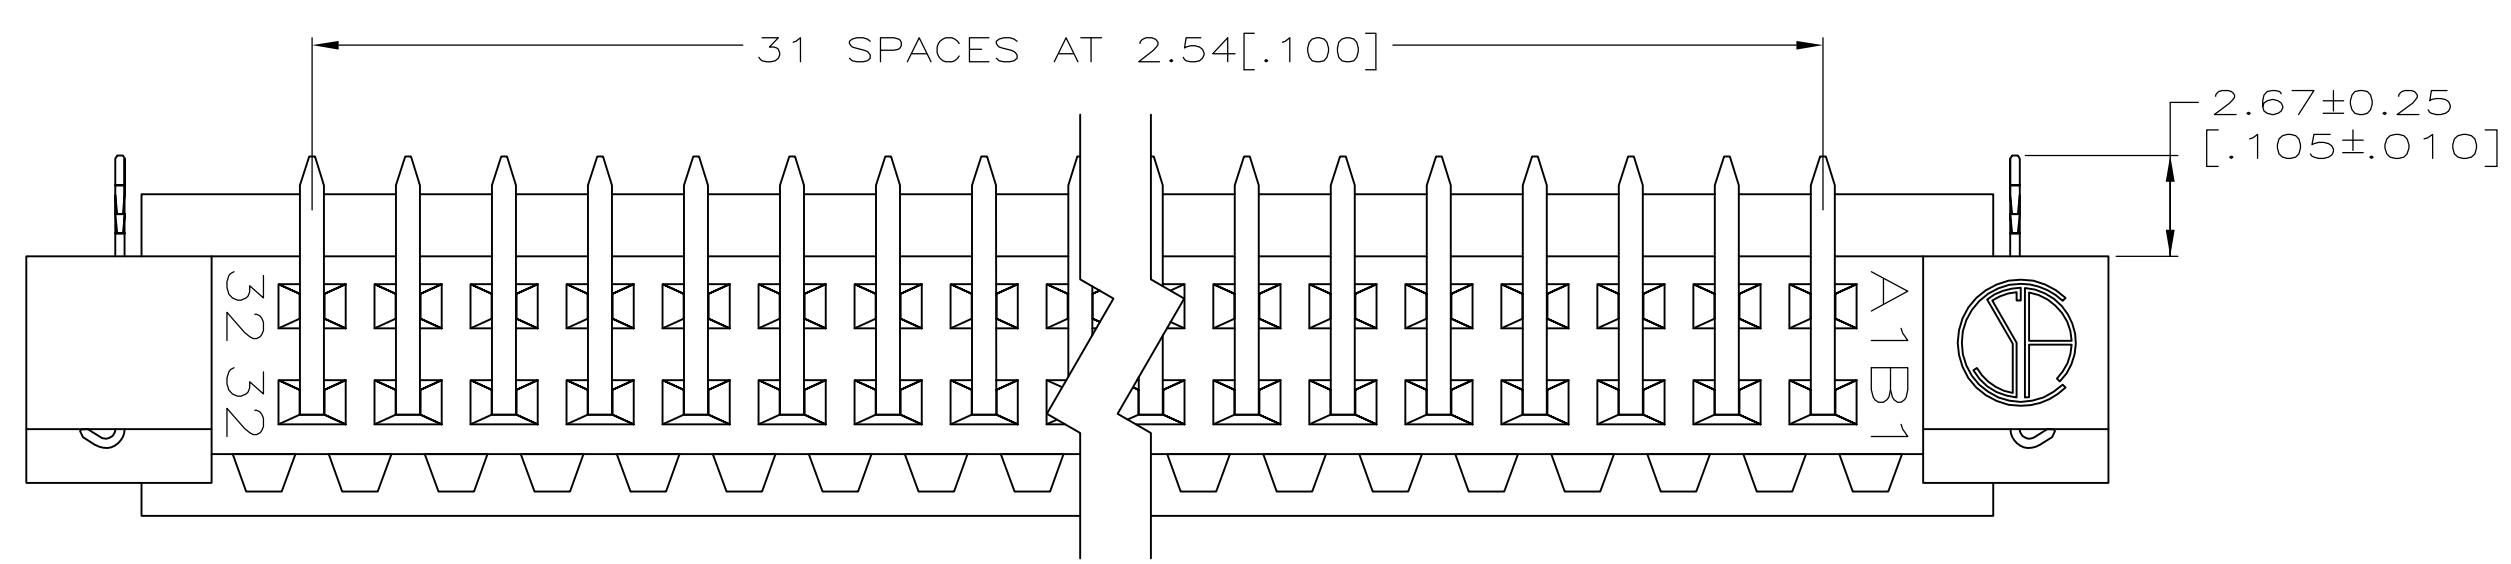
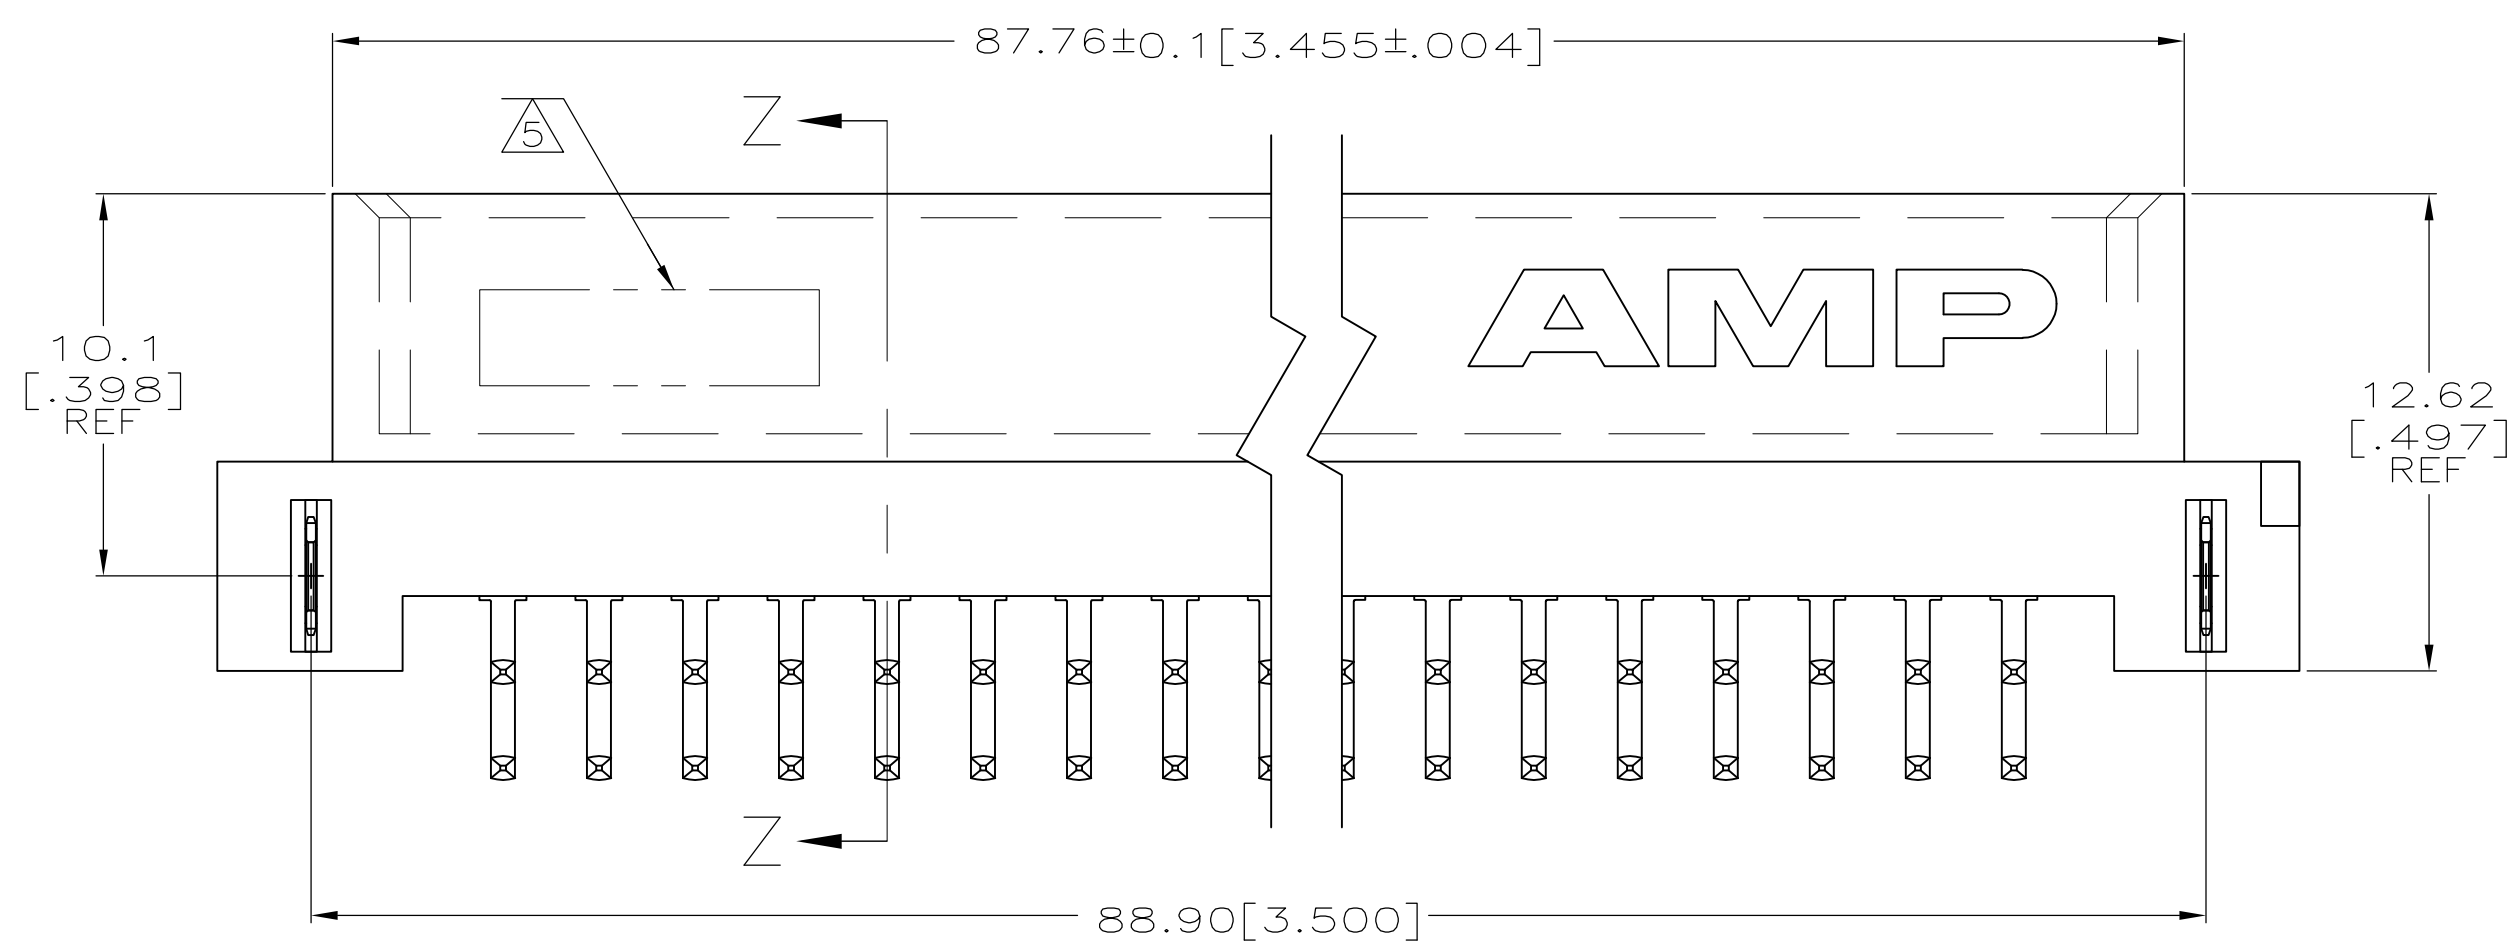


D

C


B

A


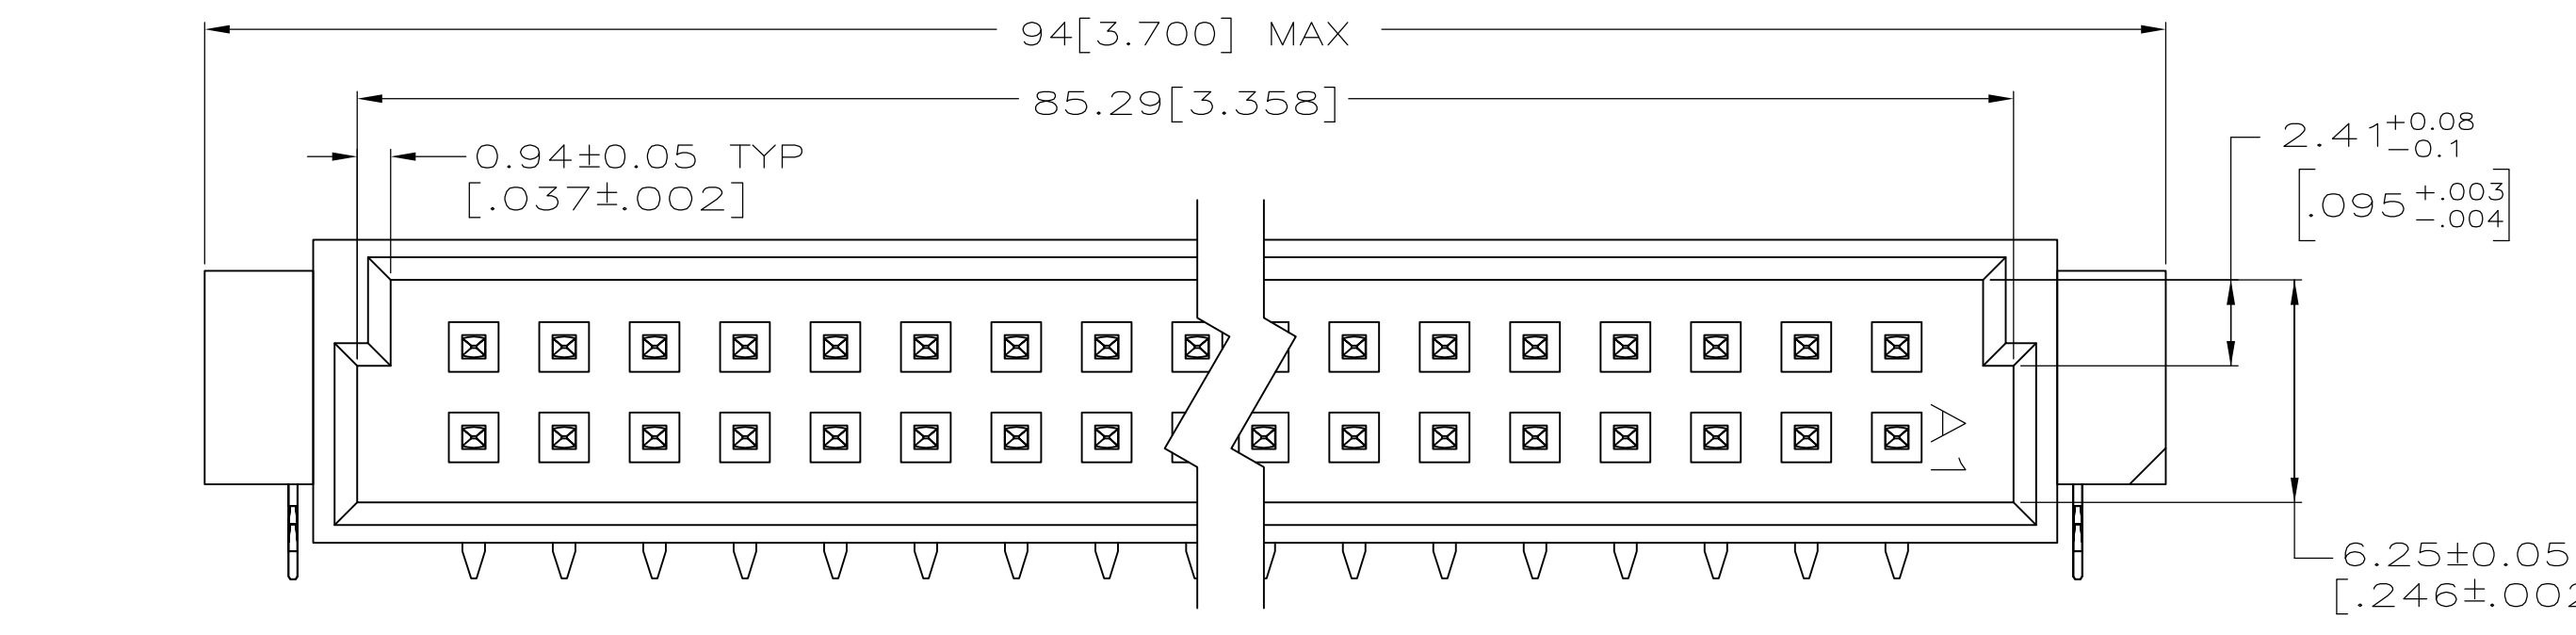


RECOMMENDED PC BOARD LAYOUT

- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 5 PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- 6 MARKINGS ON THIS SIDE.
- 7 THE 5.69[.224] LONG MAKE FIRST POSTS EXCEED THE ALIGNMENT CAPABILITY OF THE HOUSING AND COULD POSSIBLY STUB DURING MATING. CUSTOMERS MUST TAKE THIS INTO CONSIDERATION IN CARD CAGE DESIGN.

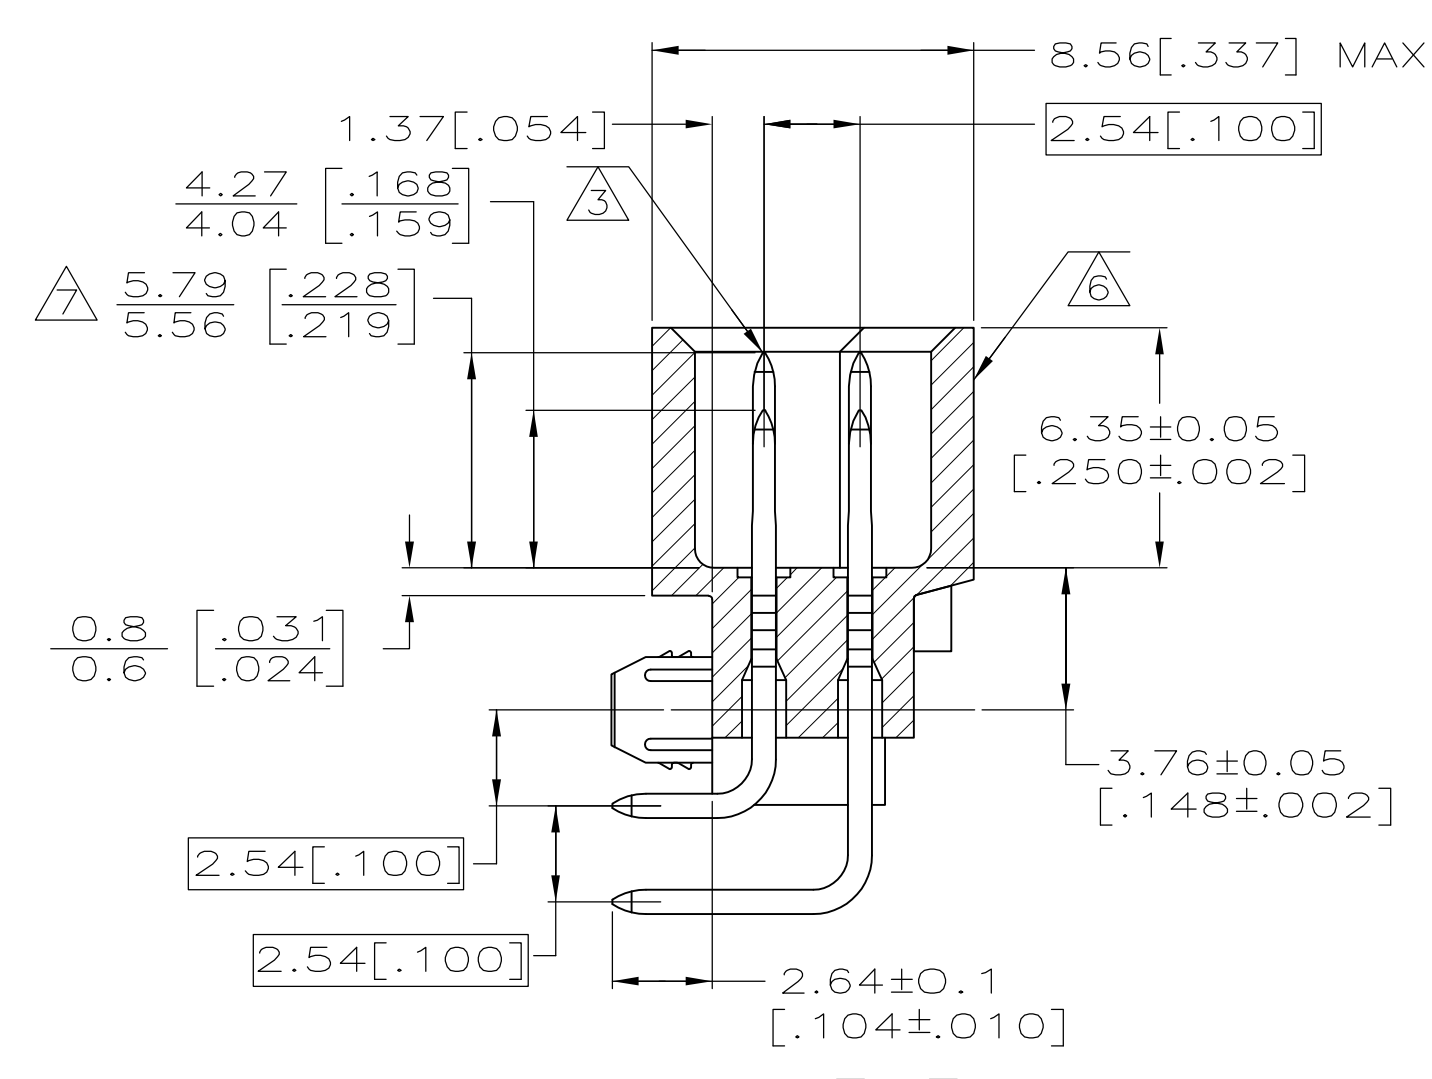

SECTION Z-Z

9-14,16,18,20,23,24		15,17,19,21,22		B		16		5148268-5
9-14,16,18,20,23,24		1,15,17,19,21,22,32		A		18		
POSITIONS LOADED WITH 5.69[.224] CONTACTS 		POSITIONS LOADED WITH 4.16[.164] CONTACTS		ROWS		NO. OF LOADED POSITIONS		PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN J. POLIGNONE OSMAYOS		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
				CHK A. SHARPE OSMAYOS				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D A. SHARPE OSMAYOS		NAME		ASSEMBLY, PIN, EUROCARD, TYPE B, 34/64 POSITION, 2.64[.104] SOLDER POST WITH MFBL CONTACTS AND BOARD-LOCKS
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC — APPLICATION SPEC —		SIZE A1		
MATERIAL  		FINISH 		WEIGHT —		CAGE CODE 00779		DRAWING NO C-5148268
CUSTOMER DRAWING				SCALE 5:1		SHEET 1 of 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5148268-5](#)