ADP-SMAF-SMAF

RF Adaptor

SMA(female) to SMA(female)

Features		
Frequency Range	DC-3GHz	
Voltage Standing Wave Ratio	≤1.15	
Impedance	50Ω	
Temperature Range	-55~+155°C	
Centre Conductor Retention Range	≥0.28N	
Coupling nut Retention Force	≥180Nq	
Insertion Loss	≤0.1dB/3GHz	
Durability (mating)	>500 Cycles	
Insulation Resistance	≥5000MΩ	
Working Voltage	355Vrms	
Max Voltage (can withstand)	1000Vrms	



Material Information		
Body	Gold plated Brass	
Pin/Socket contact	Gold plated Brass/beryllium- copper	
Crimp ferrule	Nickel/gold plated Copper alloy	
Insulator	PTFE	

Ordering Information


Part Number	Description
ADP-SMAF-SMAF	Adaptor SMA(female) to SMA(female)




RF Adaptor



VSWR

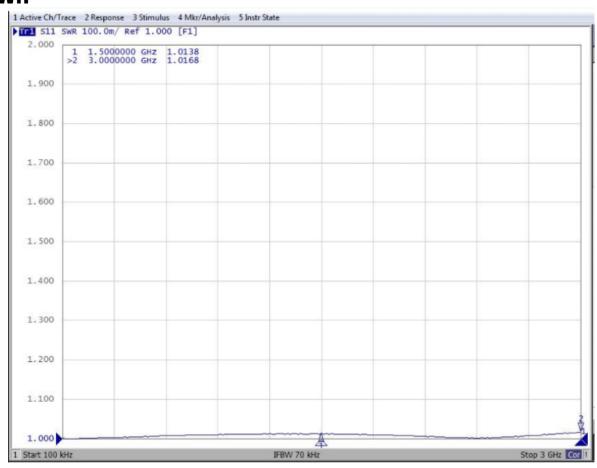

Insertion Loss

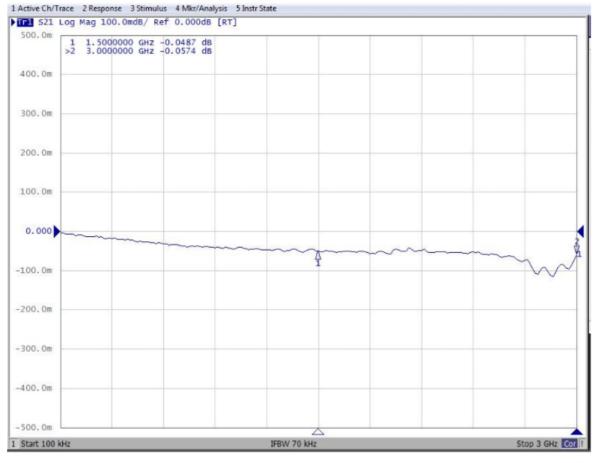


О

RF Adaptor



Mechanical Detail

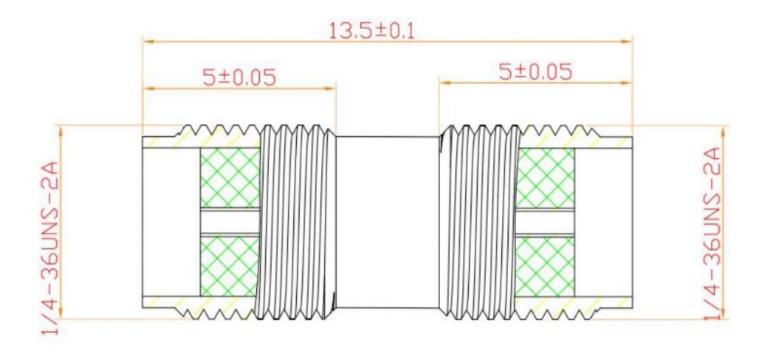

RF Solutions Ltd. Recycling Notice Meets the following EC Directives: DO NOT Discard with normal waste, please recycle. ROHS Directive 2011/65/EU Specifies certain limits for hazardous substances. WEEE Directive 2012/19/EU



Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfils its WEEE obligations by membership of an approved compliance scheme, environment agency registration number WEE/JB104WV.

Disclaimer

Disclaimer: Whilst the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular require-ments or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use RF Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict QuasarUK Ltd's liability for death or personal injury resulting from its negligence.

6

ç

www.rfsolutions.co.uk

RF Solutions Ltd William Alexander House, William Way, Burgess Hill, West Sussex, RH15 9AG Sales: +44(0)1444 227 910 Tech Support: +44(0)1444 227909

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RF Solutions: