
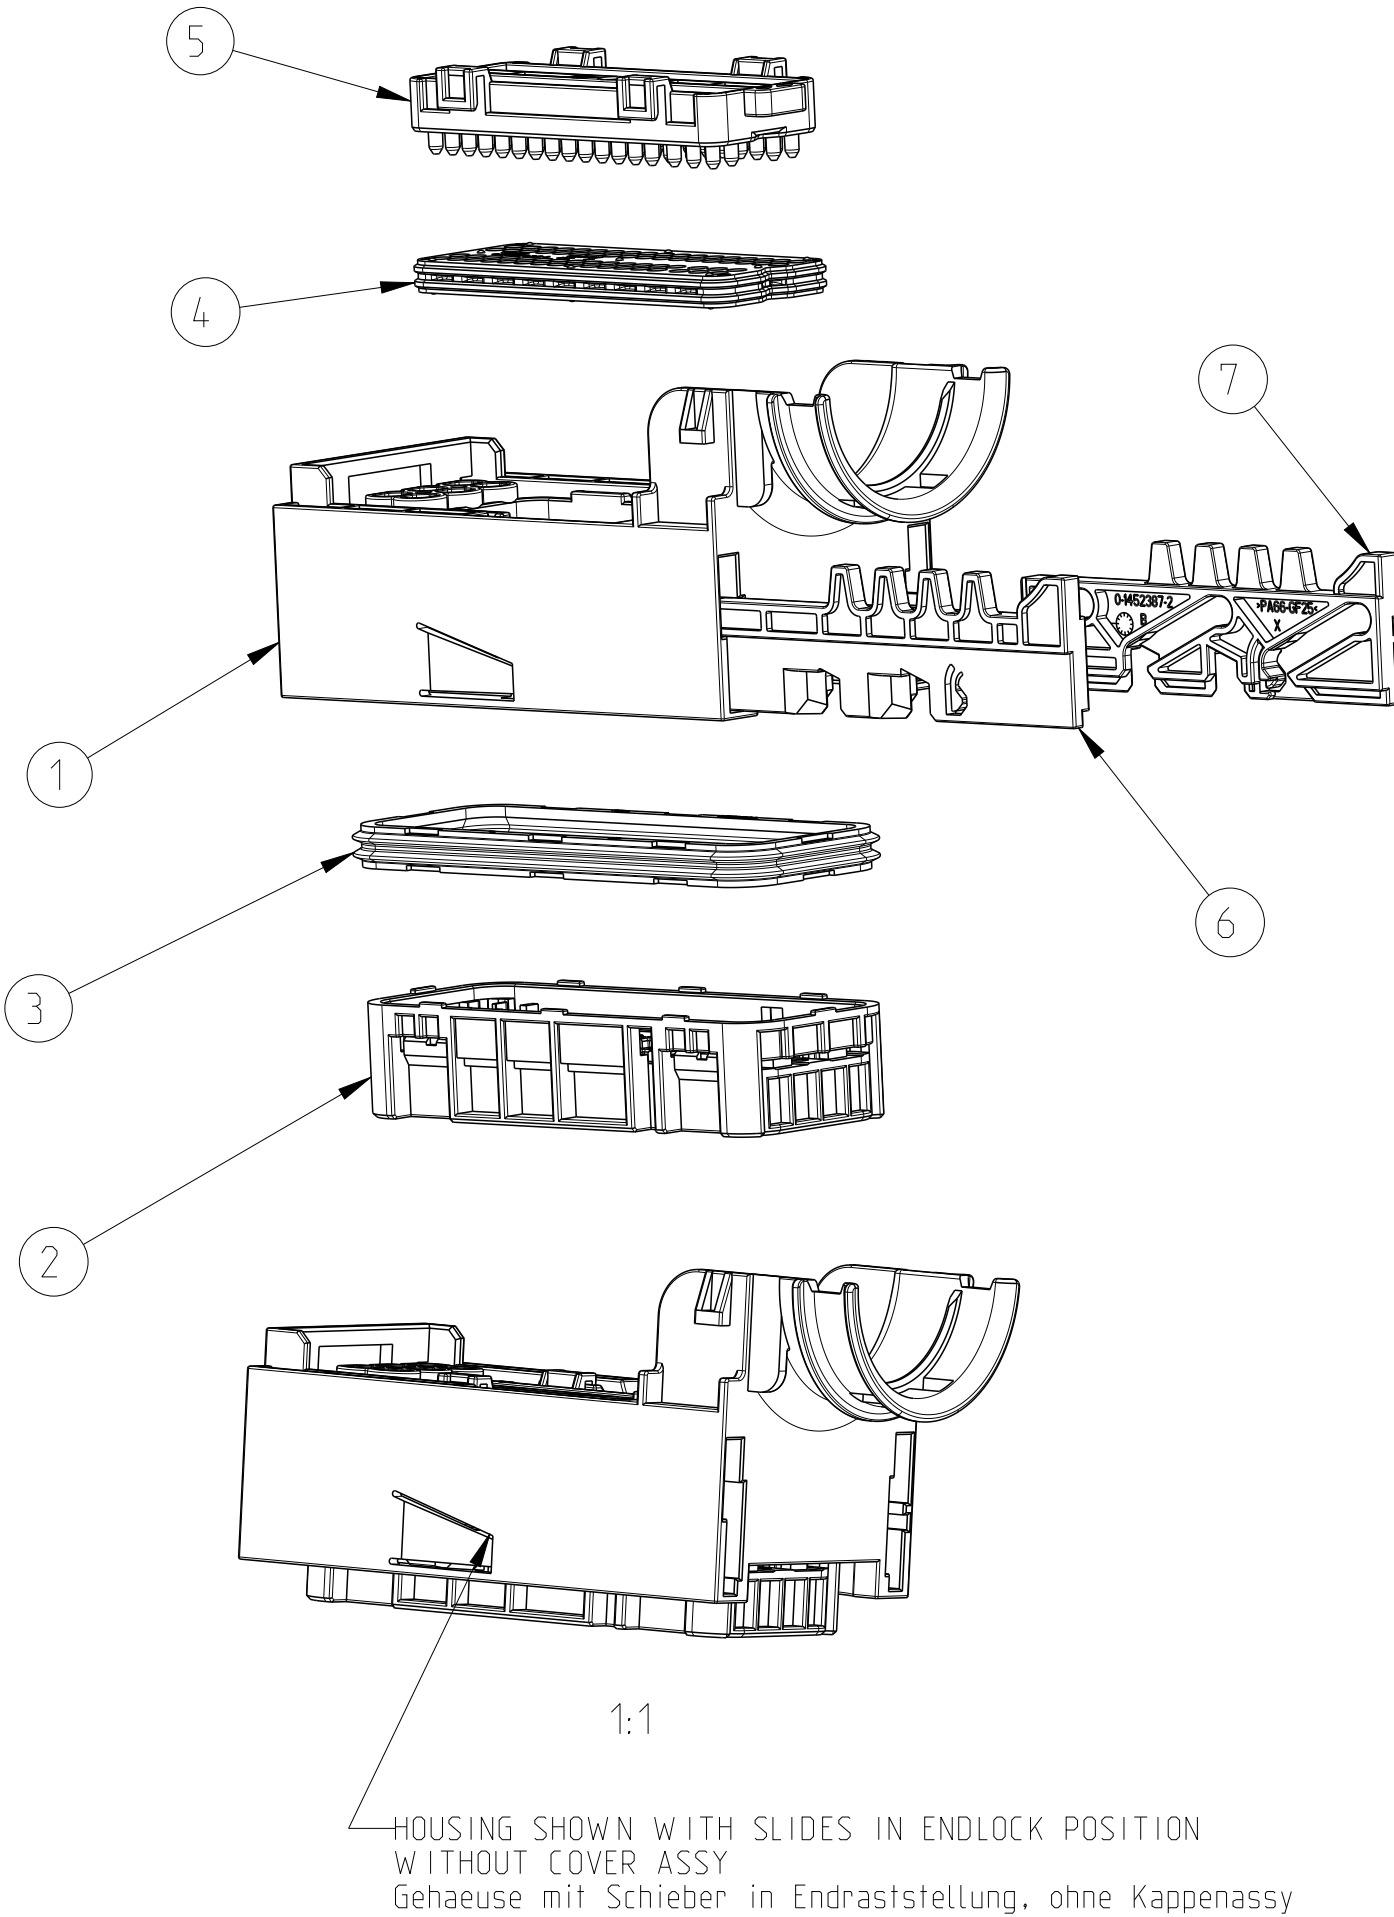
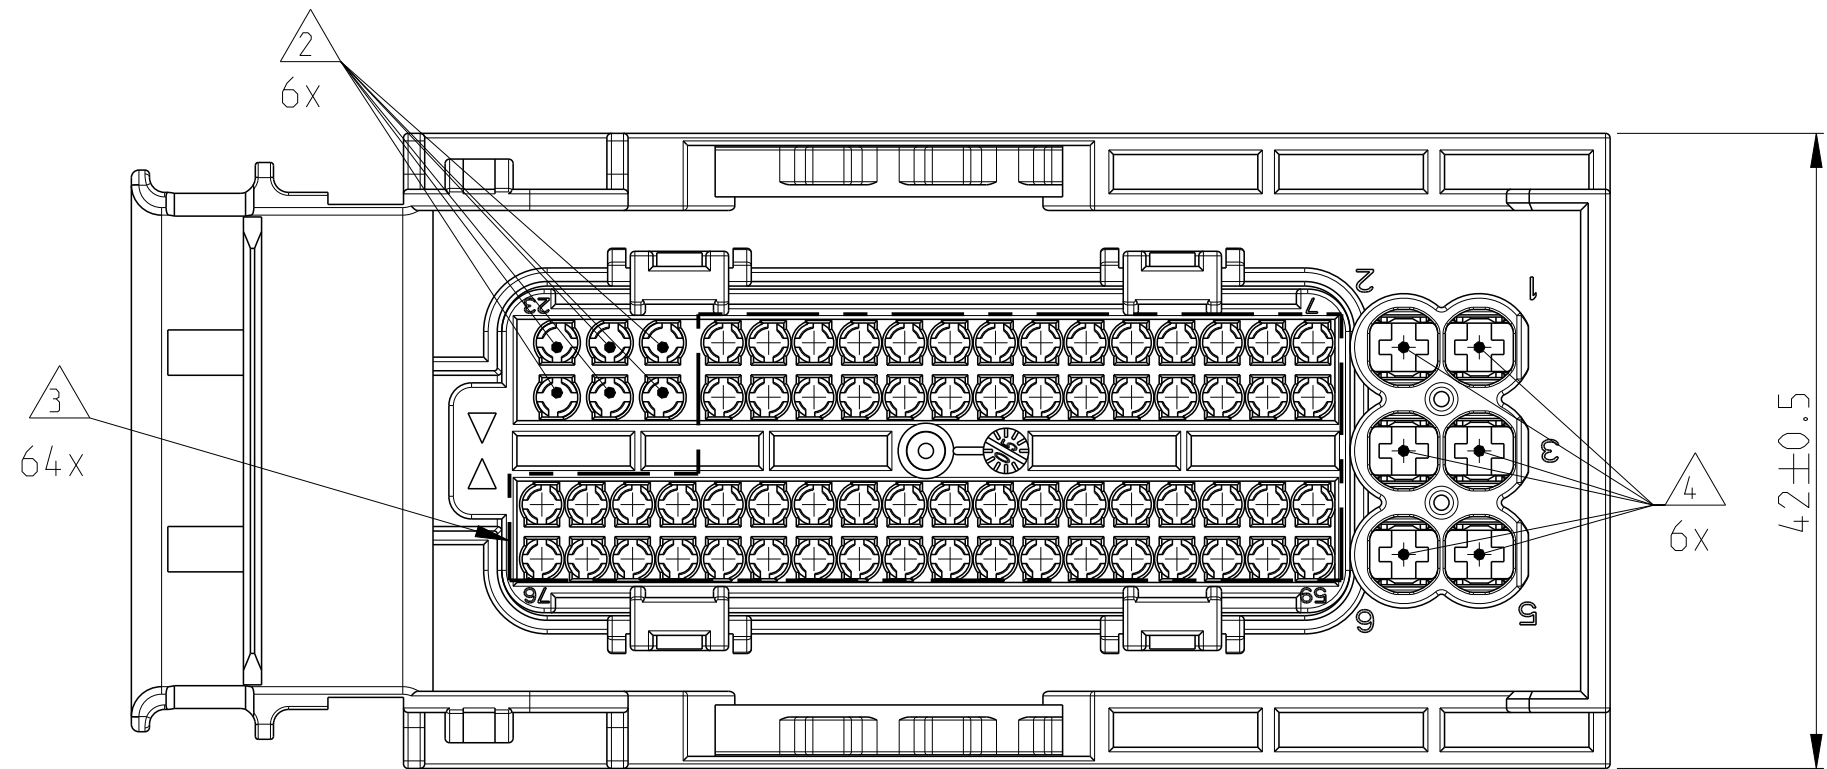
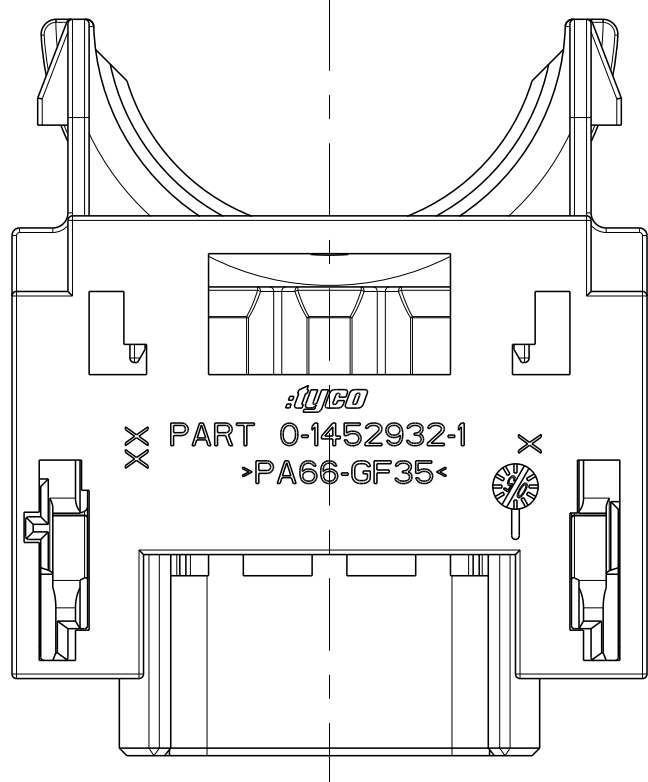


-	-	-	-	-	-	-
1452995	LIGHTGREY	CHASSIS	0-1719321-2	0-1719938-1	A	15.70
1452931	BLACK	ENGINE	0-1719321-4	0-1719938-2	B	13.10
PN	CONTACT HOUSING COLOUR	APPLICATION	FITS TO PRE-SERIES HEADER	FITS TO SERIAL PRODUCTION HEADER	CODING	X

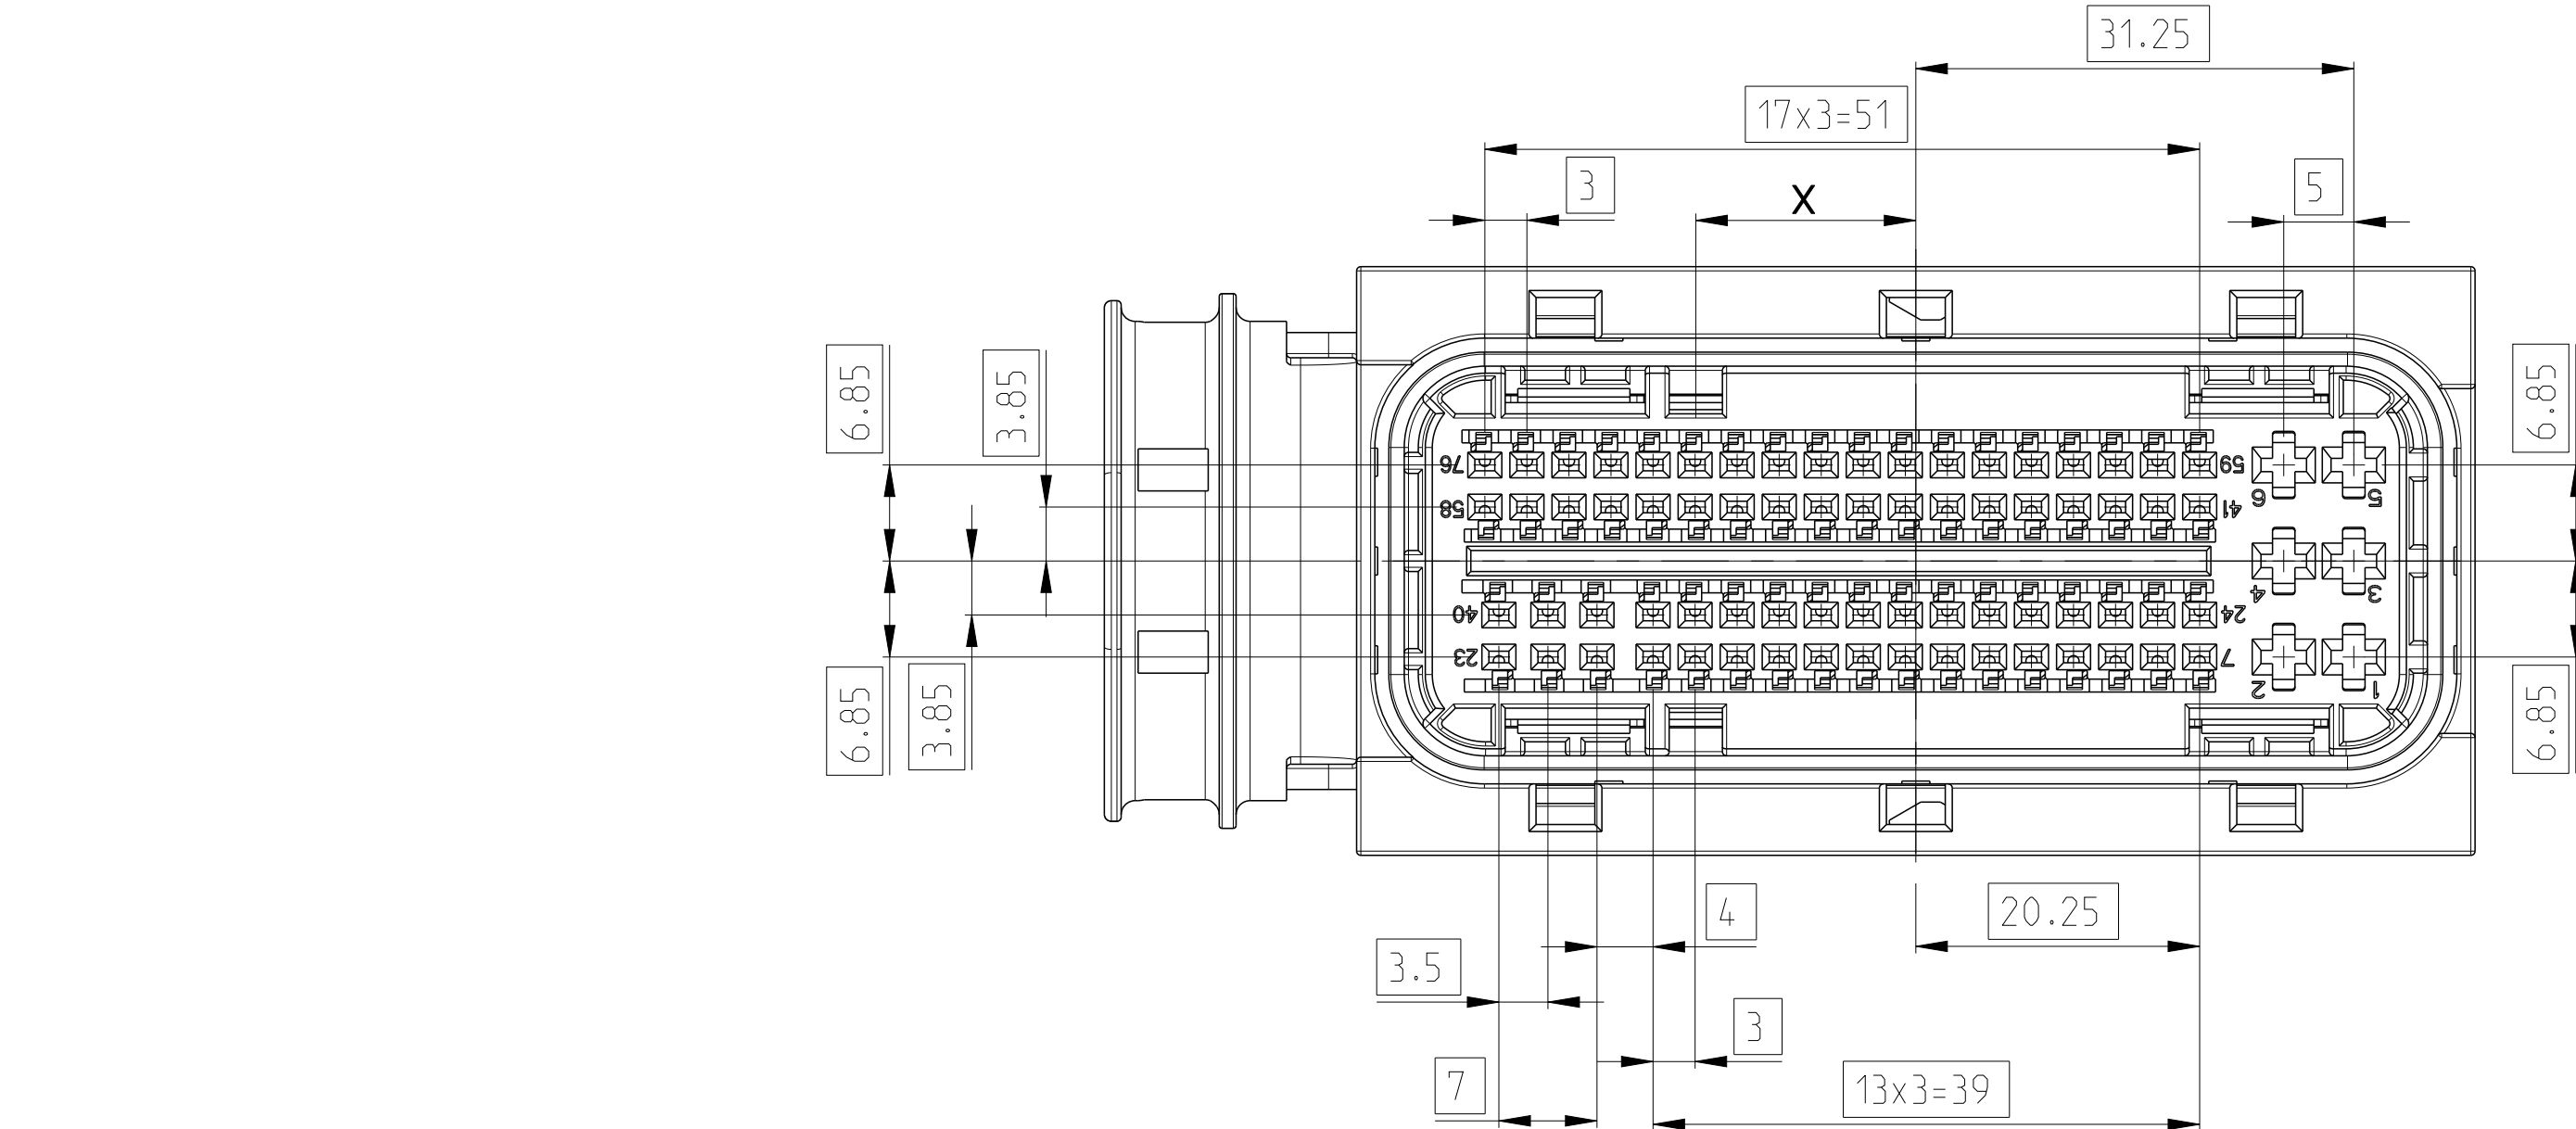

- NOTES:
Bemerkungen:
- 1 ASSY DELIVERED WITH SLIDES IN ENDLOCK POSITION
Anlieferungszustand: Schieber in Endraststellung
 - 2 6 CAVITIES FOR WIRES WITH ØDØ 1.90mm TO 2.40mm
6 Kammern fuer Drahtdurchmesser Ø 1.90mm bis 2.40mm
 - 3 64 CAVITIES FOR WIRES WITH ØDØ 1.90mm TO 2.25mm
64 Kammern fuer Drahtdurchmesser Ø 1.90mm bis 2.25mm
 - 4 6 CAVITIES FOR WIRES WITH SINGLE WIRE SEAL UP TO ØDØ 3.0mm (SEE TABLE)
6 Kammern fuer Drahtdurchmesser mit EDS bis Ø 3.0mm (siehe Tabelle)
 - 5 CONVERSION KIT NECESSARY: WIRES ØDØ 1.40mm TO 1.90mm
Umbausatz notwendig: Drahtdurchmesser Ø 1.40mm bis 1.90mm
 - 6 COUNTERPART INTERFACE SEE TE-SPECIFICATION 114-18764
Passende Stiftwanne siehe TE-Spezifikation 114-18764

MATED WITH verwendet mit	0-1452990-1 0-1452997-1 0-1452408-1 0-1719000-1	0-1452990-1 0-1452997-1 0-1452408-1 0-1719000-1	PA66-GF25 PA66-GF25 PBT-GF20 Elastosil Elastosil PA66-GF35 PA66-GF35 PA66-GF35 MATERIAL	96 POS. SLIDE RIGHT 96 POS. SLIDE LEFT 76 POS. COVER FOR FAMILY SEAL 76 POS. FAMILY SEAL 96 POS. PERIPHERAL SEAL 76 POS. CONTACT HOUSING CODING A 76 POS. CONTACT HOUSING CODING B 76 POS. FEMALE HOUSING DESCRIPTION	BLACK BLACK BLACK WHITE WHITE LIGHTGREY BLACK BLACK COLOUR	7 6 5 4 3 2 2 1 ITEM NO
ASSY-NO	ASSY-NO	ASSY-NO	73.65	73.65	WEIGHT OF EACH ASSY NO [g]	
QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY
QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY	QTY REQD PER ASSY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G.PUCKEL CHK K.ROTH APP'D G.MUMPER PRODUCT SPEC 108-94072 APPLICATION SPEC 114-18822 WEIGHT -	16DEC2004 16DEC2004 16DEC2004	 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH		NAME 76POS. CONNECTOR ASSEMBLY 70 x MCON1.2 AND 6 x MCP 2.8mm -	SIZE A1
		±0.1 ±0.1 ±0.1 ±0.1 ±0.1 ±0.1 ±0.1			
MATERIAL -		-		DRAWING NO C=1452931	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 2:1	SHEET 1 OF 2
				REV H1	

FOR WIRE WITH OUTER DIAMETER 1.9-2.4MM THE INSULATION CRIMP DIMENSIONS ARE BIGGER AS THE DIMENSIONS OF THE TERMINAL BOX. DUE TO THIS THERE IS NO POLARISATION DURING INSERTION OF THE TERMINAL IN THE FAMILY SEAL COVER.

Fuer Kabel mit Aussendurchmesser 1.9-2.4mm sind die Isolationscrimpabmessungen groesser als die Abmessungen des Buchsenkastens. Daher gibt es waehrend der Kontaktbestueckung in dem Cover for family seal keine Polarisation.

RIGHT ORIENTATION
Richtige Orientierung

TRIANGLE
Dreiecke

THE TRIANGLES ON THE FAMILY SEAL COVER SHOW THE RIGHT ORIENTATION OF THE TERMINALS DURING INSERTION IN THE CONNECTOR HOUSING. Die Dreiecke auf dem Cover for family seal zeigen die richtige Orientierung der Kontakte beim Bestuecken

A	0-1452503-3	SILVER PLATED	1.0 - 1.5	OPTIONAL SEE NOTE Optional siehe Bemerkung 	0-828905-1 (FOR ISOØ 2.2-3.0)	BLINDPLUG Blindstopfen PN 828922	
	0-1391897-3		0.5 - 0.75				
	0-1452503-2		1.0 - 1.5				
	0-1391897-2	0.5 - 0.75	OPTIONAL SEE NOTE Optional siehe Bemerkung 	0-828904-1 (FOR ISOØ 1.2-2.1)			
	0-1452503-1	1.0 - 1.5					
	0-1391897-1	0.5 - 0.75	OPTIONAL SEE NOTE Optional siehe Bemerkung 				
	1-968857-1	1.0 - 2.5				0-828905-1 (FOR ISOØ 2.2-3.0)	BLINDPLUG Blindstopfen PN 828922
	1-968855-1	0.5 - 1.0					
	1-968882-1	0.35					
	1-968857-3	1.0 - 2.5					
	1-968855-3	0.5 - 1.0					
	1-968882-3	0.35					
TERMINALS TE PN TE Kontakte PN	FINISH Oberflaeche	WIRE SIZE (mm ²) Drahtquerschnitt (mm ²)	SINGLE WIRE SEAL Einzelleiterdichtung		NOTES Bemerkungen		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1452931-6](#) [1452931-7](#)