

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0026482042

Status:

Active

Overview:


KK® Interconnect System - Molex

Description:

KK 396 Breakaway Header, Right-Angle, 4 Circuits, Gold (Au) Plating

Documents:	
3D Model	Product Specification PS-08-50-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	41662
Application	Board-to-Board, Power, Wire-to-Board
Application Tooling Part Link	11-20-0901
Overview	KK® Interconnect System - Molex
Product Name	KK 396
UPC	800754388016
Physical	
Breakaway	Yes
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	Polyester
Net Weight	1.457/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	4.67mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	3.96mm
Pitch - Termination Interface	3.96mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Partial
Stackable	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	7.0A

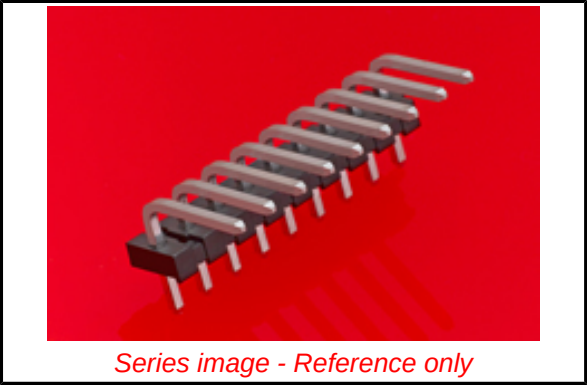

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/61/2018 (27 June 2018)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

41662 Series

Mates With

2139 KK Crimp Housing, 41695 KK Crimp Housing, 6442 KK Crimp Housing, 2145 PCB Connector, 41815 PCB Connector, 3069 KK Crimp Housing

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235
Material Info	
Engineering Number	41662-B04A241
Reference - Drawing Numbers	
Product Specification	PS-08-50-001
Sales Drawing	SD-41662-001, SD-41662-001-002

This document was generated on 11/27/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[26-48-2042](#)