

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0522072933

Status:


Active

Overview:

Easy-On FFC FPC Connectors

Description:

Easy-On FFC/FPC Connector, 1.00mm Pitch, Slider Series, Right-Angle, Top Contact, 2.70mm Height, 29 Circuits, Tin-Silver-Bismuth Plating

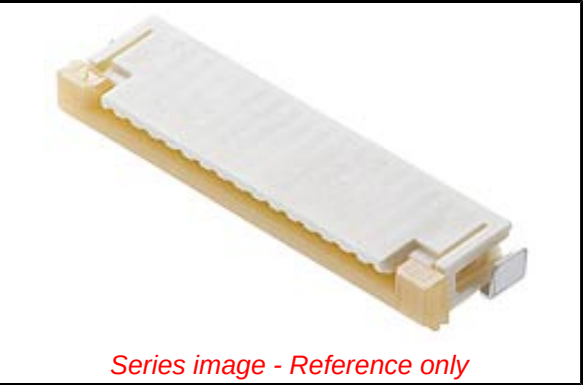

Documents:	
3D Model	RoHS Certificate of Compliance (PDF)
Drawing (PDF)	Product Literature (PDF)
Product Specification PS-52207-009-001 (PDF)	Product Literature (PDF)
Packaging Specification SPK-52207-002-001 (PDF)	

Agency Certification		
CSA		LR19980
UL		E29179
General		
Product Family		FFC/FPC Connectors
Series		52207
Datasheet Order No		987651-8732, 987651-8736_ZH, 987651-8768_DE, 987651-8772_JA, 987651-8776_KO, 987651-8780_ES
Overview		Easy-On FFC FPC Connectors
Product Guide Order No		987651-8061
Product Literature Order No		987652-0194, Reference Guide#
Product Name		Easy-On
Series Name		Slider
UPC		887191278124
Physical		
Actuator Type		Slider
Circuits (Loaded)		29
Color - Resin		Natural
Contact Position		Top
Durability (mating cycles max)		30
Flammability		94V-0
Mated Height		2.70mm
Material - Metal		Phosphor Bronze
Material - Plating Mating		Tin-Silver-Bismuth
Material - Plating Termination		Tin-Silver-Bismuth
Material - Resin		Nylon
Net Weight		990.800/mg
Number of Rows		1
Orientation		Right Angle
PC Tail Length		2.00mm
PCB Locator		No
PCB Mounting		Surface Mount
PCB Retention		Yes
Packaging Type		Embossed Tape on Reel
Pitch - Mating Interface		1.00mm
Pitch - Termination Interface		1.00mm
Polarized to PCB		Yes
Stackable		No
Temperature Range - Operating		-40° to +85°C
Wire/Cable Type		FFC/FPC
Electrical		
Current - Maximum per Contact		1.0A

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/71/2019 (16 July 2019)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

52207 Series

Mates With

Premo-Flex FFC Cable [15167](#) , [98267](#) , [15267](#)

Voltage - Maximum	125V
Material Info	
Reference - Drawing Numbers	
Packaging Specification	SPK-52207-002-001
Product Specification	PS-52207-009-001
Sales Drawing	SD-52207-069-001, SD-52207-070

This document was generated on 10/04/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52207-2933](#)