


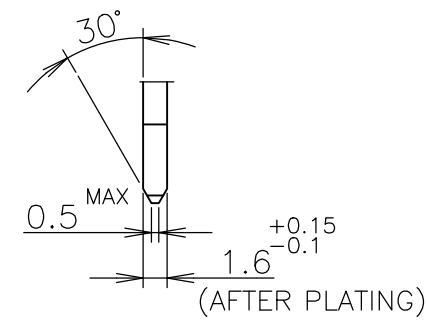


1 NUMBER "n" IS COUNTED FROM DATUM
(CIRCUIT NO.1 IS "AMP" MARK SIDE.)

△ MATERIAL: HOUSING, 66 NYLON (GF) UL 94V-0, BLACK.
: CONTACT, PHOSPHOR BRONZE.
: RETENTION LEG; BRASS.


△ 3 FINISH: CONTACT; Au AT CONTACT AREA (SEE TABLE),
TIN AT TINE, OVER Ni.
RETENTION LEG; TIN UNDER Ni.

△ 4 P.C. BOARD THK MUST BE 1.6 ±0.15 CARD EDGE CONNECTOR

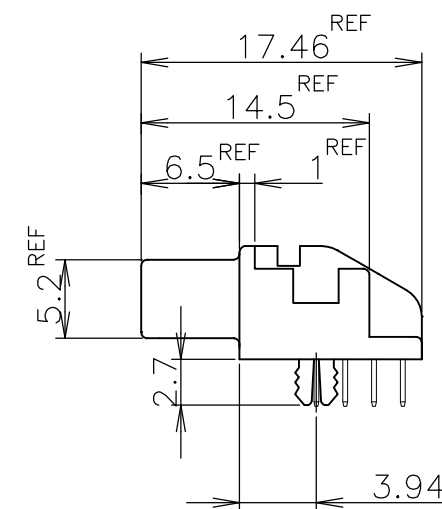

DETAIL G

RECOMMENDED P.C. BOARD DIMMENSIONS.

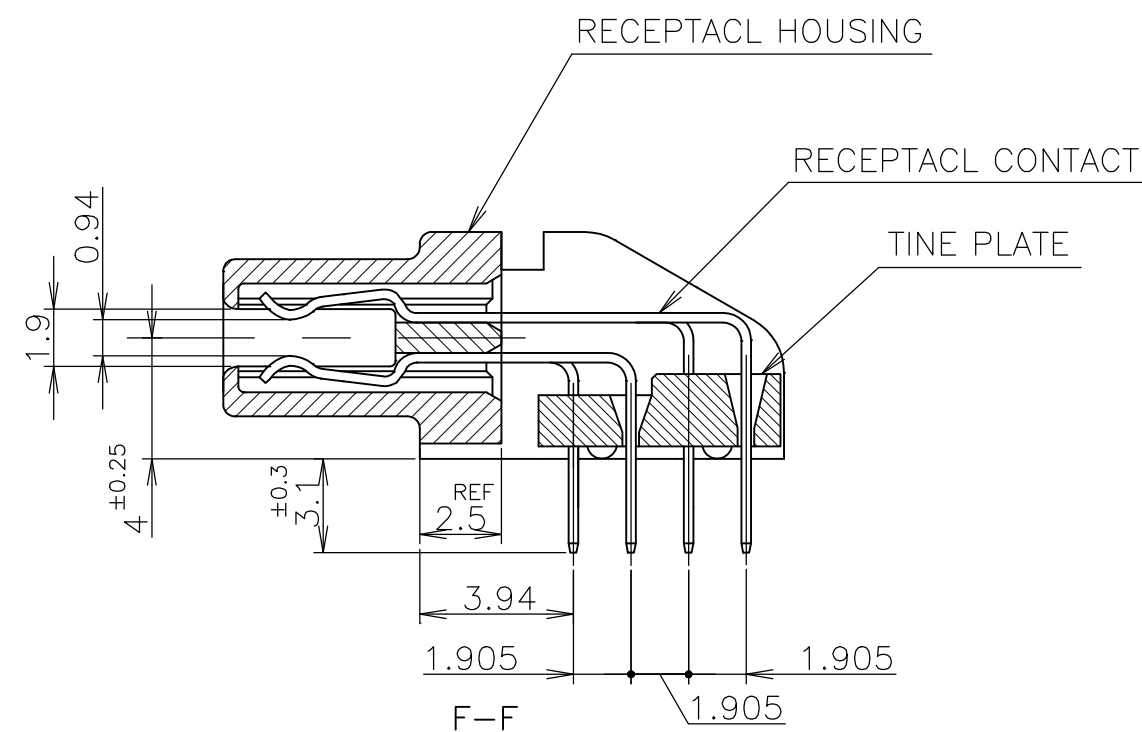

GENERAL TOLERANCE

10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED	
mm		0 PLC	±
		1 PLC	±
		2 PLC	±
		3 PLC	±
		4 PLC	±
		ANGLES	±
MATERIAL		FINISH	

DWN	130CT88
S.ISHIKAWA	
CHK	19AUG2004
Steven Yao	
APVD	19AUG2004
Julyee Zhu	
PRODUCT SPEC	
108-60038	
APPLICATION SPEC	
WEIGHT	0.000000
CUSTOMER DRAWING	

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A2	00779	C-5175474		
		SCALE	SHEET	REV
		NTS	1 OF 1	S

OBSOLETE	6-	2		130	64	81.28	86.82	88.68	92.48	83.18
OBSOLETE	6-	-1		120	59	74.93	80.47	82.33	86.13	76.83
	6-	0		100	49	62.23	67.77	69.63	73.43	64.13
	5-	-9		80	39	49.53	55.07	56.93	60.73	51.43
OBSOLETE	5-	-8		68	33	41.91	47.45	49.31	53.11	43.81
	5-	-7		60	29	36.83	42.37	44.23	48.03	38.73
	5-	-6		50	24	30.48	36.02	37.88	41.68	32.38
	5-	-5		40	19	24.13	29.67	31.53	35.33	26.03
OBSOLETE	5-	-3		30	14	17.78	23.32	25.18	28.98	19.68
	5-	-1	0.00076	20	9	11.43	16.97	18.83	22.63	13.33
OBSOLETE	4-	-2		130	64	81.28	86.82	88.68	92.48	83.18
	4-	-1		120	59	74.93	80.47	82.33	86.13	76.83
	4-	0		100	49	62.23	67.77	69.63	73.43	64.13
OBSOLETE	3-	-9		80	39	49.53	55.07	56.93	60.73	51.43
	3-	-8		68	33	41.91	47.45	49.31	53.11	43.81
	3-	-7		60	29	36.83	42.37	44.23	48.03	38.73
	3-	-6		50	24	30.48	36.02	37.88	41.68	32.38
	3-	-5		40	19	24.13	29.67	31.53	35.33	26.03
	3-	-3		30	14	17.78	23.32	25.18	28.98	19.68
	3-	-1	0.0005	20	9	11.43	16.97	18.83	22.63	13.33
OBSOLETE	1-	-2		130	64	81.28	86.82	88.68	92.48	83.18
OBSOLETE	1-	-1		120	59	74.93	80.47	82.33	86.13	76.83
	1-	0		100	49	62.23	67.77	69.63	73.43	64.13
OBSOLETE		-9		80	39	49.53	55.07	56.93	60.73	51.43
		-8		68	33	41.91	47.45	49.31	53.11	43.81
OBSOLETE		-7		60	29	36.83	42.37	44.23	48.03	38.73
		-6		50	24	30.48	36.02	37.88	41.68	32.38
		-5		40	19	24.13	29.67	31.53	35.33	26.03
OBSOLETE		-4		36	17	21.59	27.13	28.99	32.79	23.49
OBSOLETE		-3		30	14	17.78	23.32	25.18	28.98	19.68
	5175474-1		0.0002	20	9	11.43	16.97	18.83	22.63	13.33
	PART NO.		AU PLATE	POS.	n	A	B	C	D	E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-5175474-2](#)