

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC



DIST

FB


00

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
P1	ECR-14-017977		27MAR17	T.Q	W.H

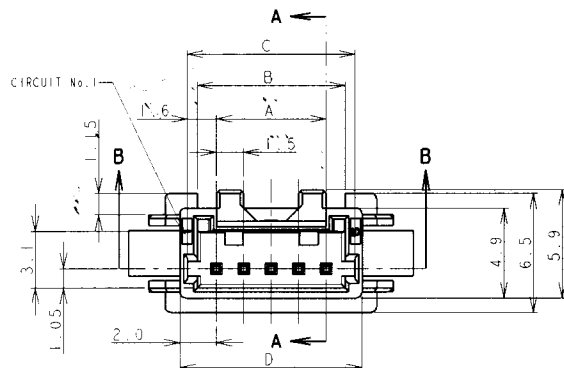

SECT A-A




MATING SECTION

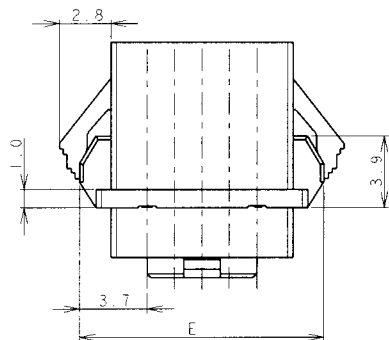


RECOMMENDED FIRST MATING SIDE

0.5 SQ. POST

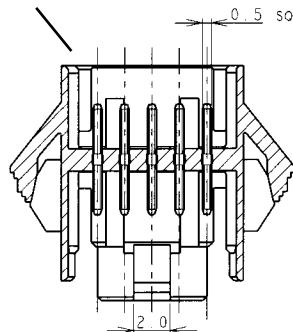



SECT B-B

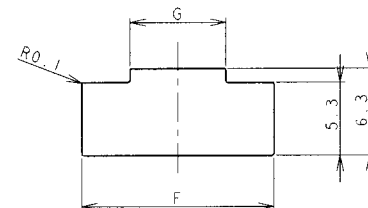

PANEL CUTOUT DIMENSION (TOLERANCE: ± 0.1 mm)
(RECOMMENDED PANEL THICKNESS: 0.8mm~1.6mm)


NOTES

1. MATERIAL
HOUSING: 66NYLON(94V-0). COLOR: WHITE. BLUE
POST: TIN BRASS WIRE
2. THE PANEL SHOULD BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS PUNCH.

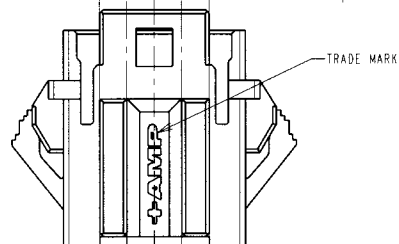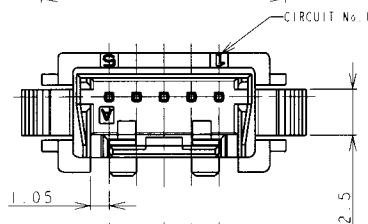

DIMENSIONS (mm)		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN: J. JIANG 04FEB03		
				CHK: S. YAO 04FEB03		
				APVD: T. SASAKI 04FEB03	NAME	
				PRODUCT SPEC	AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5mm PITCH	
				APPLICATION SPEC	SINGLE ROW POST HEADER ASS'Y PANEL MOUNT TYPE	
				WEIGHT	RESTRICTED TO	
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO
SEE NOTE 1		SEE NOTE 1		A3	00779	C=292215
				CUSTOMER DRAWING		SCALE
						NON
						SHEET
						1 OF 2
						REV P1

LOC	DIST	REVISIONS							DATE	DWN	APVD
FB	00	P	LTR	DESCRIPTION							
		-		SEE SHEET 1					-	-	-

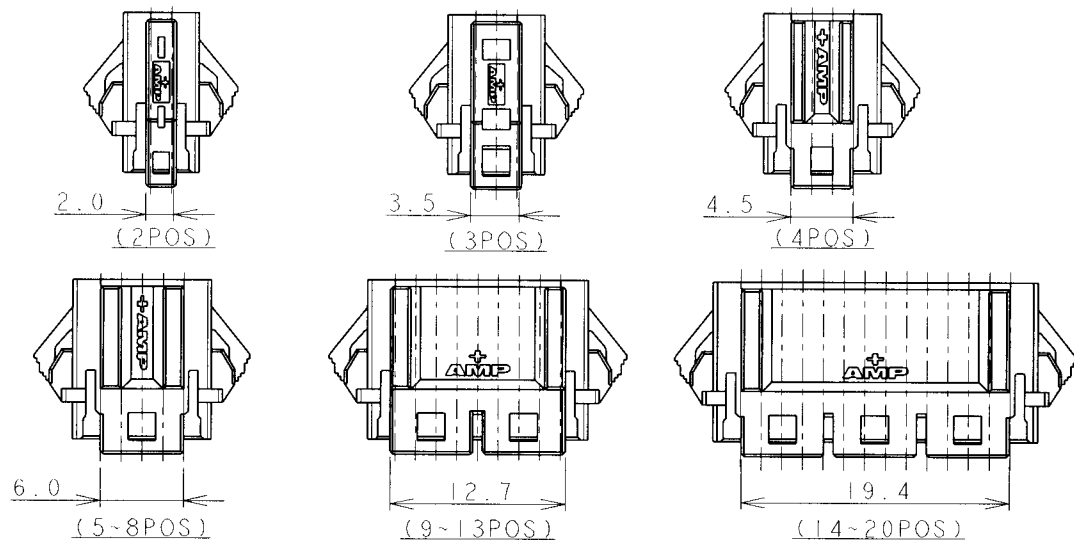


1.41	19.8	36.5	35.9	32.5	31.7	30.6	28.5	20	7-292215-0	2-292215-0
1.35	19.8	35.0	34.4	31.0	30.2	29.1	27.0	19	6-292215-9	1-292215-9
1.30	19.8	33.5	32.9	29.5	28.7	27.6	25.5	18	6-292215-8	1-292215-8
1.24	19.8	32.0	31.4	28.0	27.2	26.1	24.0	17	6-292215-7	1-292215-7
1.19	19.8	30.5	29.9	26.5	25.7	24.6	22.5	16	6-292215-6	1-292215-6
1.13	19.8	29.0	28.4	25.0	24.2	23.1	21.0	15	6-292215-5	1-292215-5
1.08	19.8	27.5	26.9	23.5	22.7	21.6	19.5	14	6-292215-4	1-292215-4
0.97	13.1	26.0	25.4	22.0	21.2	20.1	18.0	13	6-292215-3	1-292215-3
0.92	13.1	24.5	23.9	20.5	19.7	18.6	16.5	12	6-292215-2	1-292215-2
0.86	13.1	23.0	22.4	19.0	18.2	17.1	15.0	11	6-292215-1	1-292215-1
0.81	13.1	21.5	20.9	17.5	16.7	15.6	13.5	10	6-292215-0	1-292215-0
0.75	13.1	20.0	19.4	16.0	15.2	14.1	12.0	9	5-292215-9	0-292215-9
0.64	6.4	18.5	17.9	14.5	13.7	12.6	10.5	8	5-292215-8	0-292215-8
0.59	6.4	17.0	16.4	13.0	12.2	11.1	9.0	7	5-292215-7	0-292215-7
0.53	6.4	15.5	14.9	11.5	10.7	9.6	7.5	6	5-292215-6	0-292215-6
0.48	6.4	14.0	13.4	10.0	9.2	8.1	6.0	5	5-292215-5	0-292215-5
0.44	4.9	12.5	11.9	8.5	7.7	6.6	4.5	4	5-292215-4	0-292215-4
0.37	4.1	11.0	10.4	7.0	6.2	5.1	3.0	3	5-292215-3	0-292215-3
0.30	2.6	9.5	8.9	5.5	4.7	3.6	1.5	2	5-292215-2	0-292215-2
WEIGHT (g)	G	F	E	D	C	B	A		BLUE	WHITE
	DIMENSIONS							Pos	P/N	

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10 > : ±0.2
30 > 10 : ±0.25
100 > 30 : ±0.3
ANGLE : ±3°



DWN	
CHK	
APVD	
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	

MATERIAL		FINISH	
SEE SHEET 1		SEE SHEET 1	
 TE Connectivity			
NAME			
AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5mm PITCH			
SINGLE ROW POST HDR ASS'Y PANEL MOUNT TYPE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	C-292215	-
CUSTOMER DRAWING		SCALE	SHEET
		NON	2
		OF	2
		REV	P1

20

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-292215-2](#)