

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		C	REDRAWN PER 0720-0470-95	23JAN95	LO	ME

AMP WIRE RANGE	 E13288	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

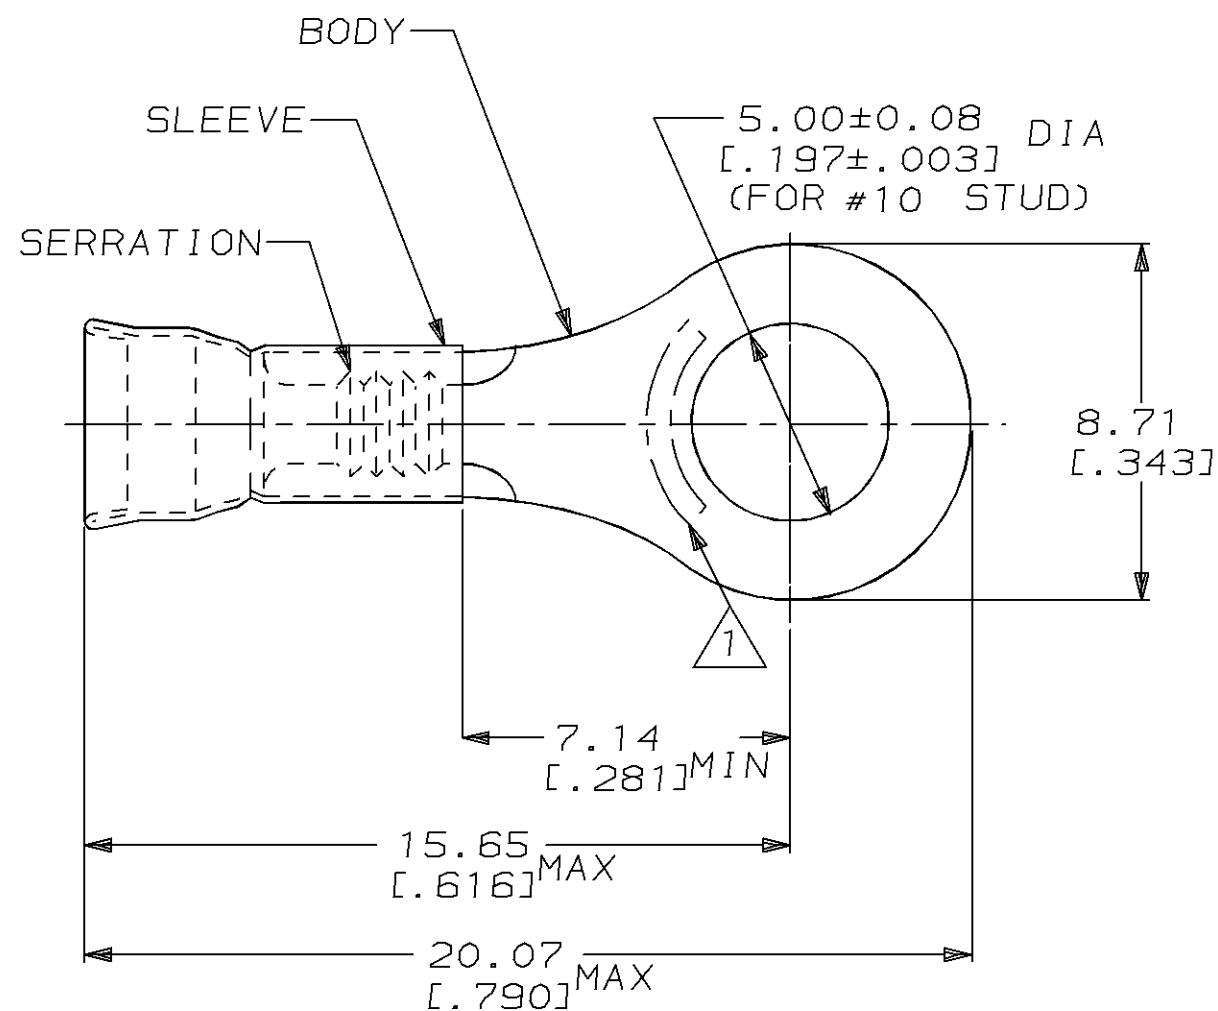

1 STAMP AMP 16-14* LOCATE APPROX AS SHOWN

2. WIRE INSUL DIA, 2.92-4.32 [.115-.170]

3. TONGUE MATL THK, 0.79±0.05 [.031±.002]

5000	ON TAPE, REEL	2-30928-1
1000	LOOSE PIECE	30928
QTY	PACKAGE TYPE	PART NO


AMP INCORPORATED
CUSTOMER SERVICE SYSTEM

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C [338°F]

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm [in]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL
BODY, CU, SLV, CU PER
ASTM B152

FINISH
TIN PLATE
PER MIL-T-10727

DWN	L OLMEDA	23JAN95
CHK	M ELLIS	23JAN95
APVD	S BORTNER	23JAN95
PRODUCT SPEC	UL486A	
APPLICATION SPEC	-	
WEIGHT	-	
CUSTOMER DRAWING		

AMP AMP Incorporated Harrisburg, PA 17105-3608		
NAME TERMINAL, RING, DIAMOND GRIP, WIRE SIZE, 16-14 AWG		
SIZE	CAGE CODE	DRAWING NO
A3	00779	C-30928
SCALE 6:1		SHEET 1 OF 1
		REV C

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

CIRCULAR MIL AREA:
1.04mm²-2.62mm² [2050-5180]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-30928-1](#)