
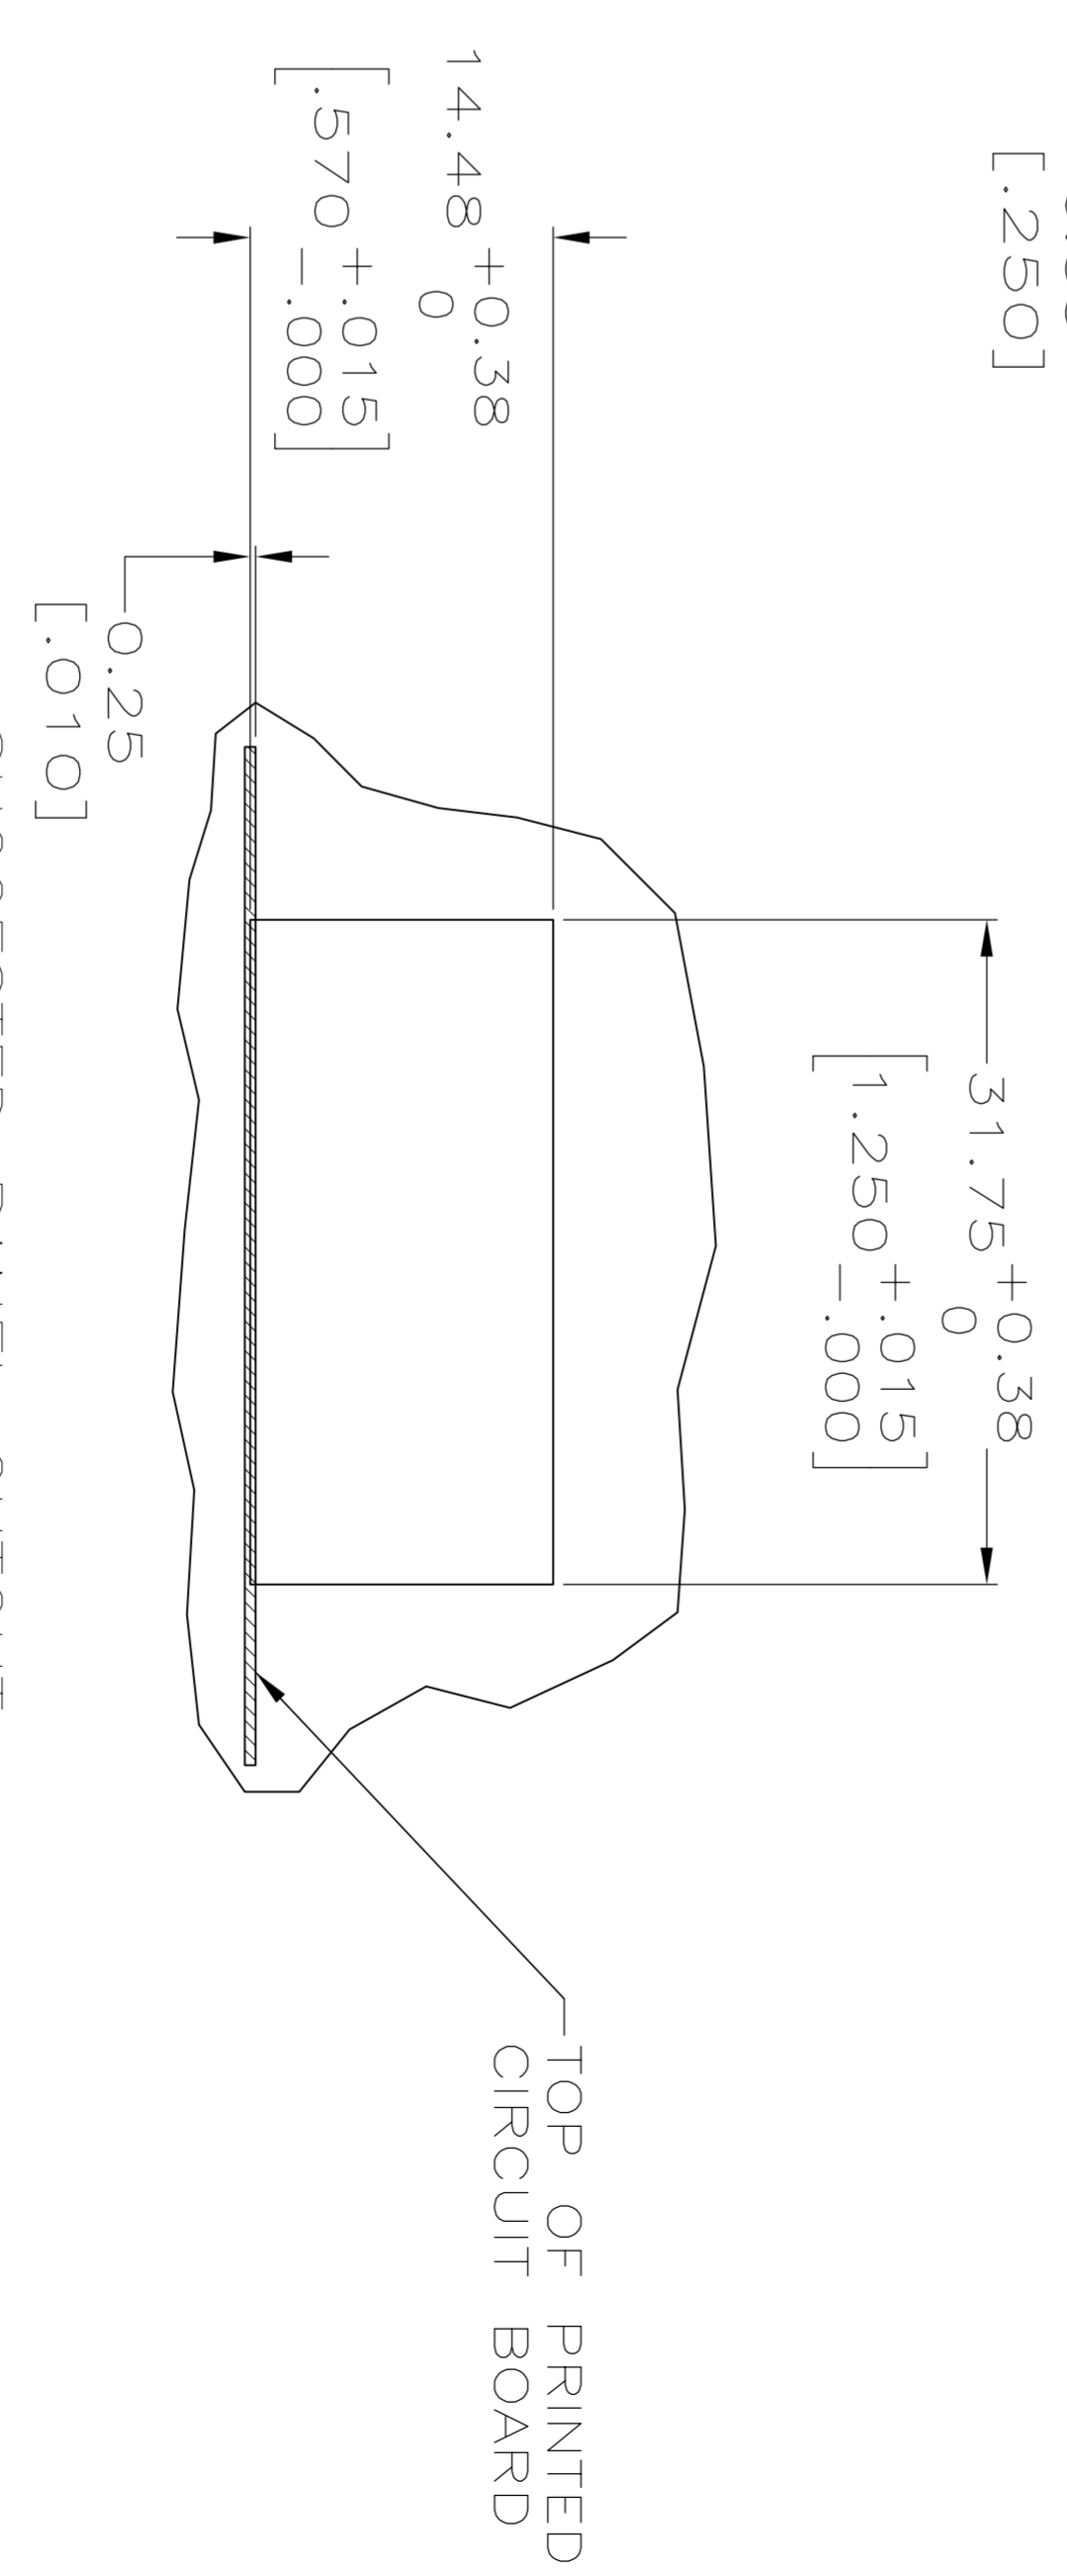


- 1 MATERIAL: HOUSING - HIGH TEMPERATURE NYLON, BLACK, IR COMPATIBLE, UL 94V-0.
- 2 TERMINALS - 0.33 [0.013] THICK PHOS BRONZE PLATED WITH 1.27 μm [0.00050] THICK HARD GOLD IN LOCALIZED AREA AND 3.81 μm [0.00150] THICK MATTE TIN IN SOLDER AREA OVER 1.27 μm [0.00050] THICK NICKEL UNDERPLATE. SHIELD - 0.254 [0.010] THICK COPPER ALLOY PLATED WITH 1.27 μm [0.00050] MINIMUM NICKEL AND 2.03 μm [0.00080] MINIMUM HOT TIN DIP ON PCB GROUND TABS.
- 3 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- 4 ALL DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- 5 THIS HOLE REQUIRED FOR -2 ONLY.
- 6 REAR GROUND TAB NOT REQUIRED FOR -1.

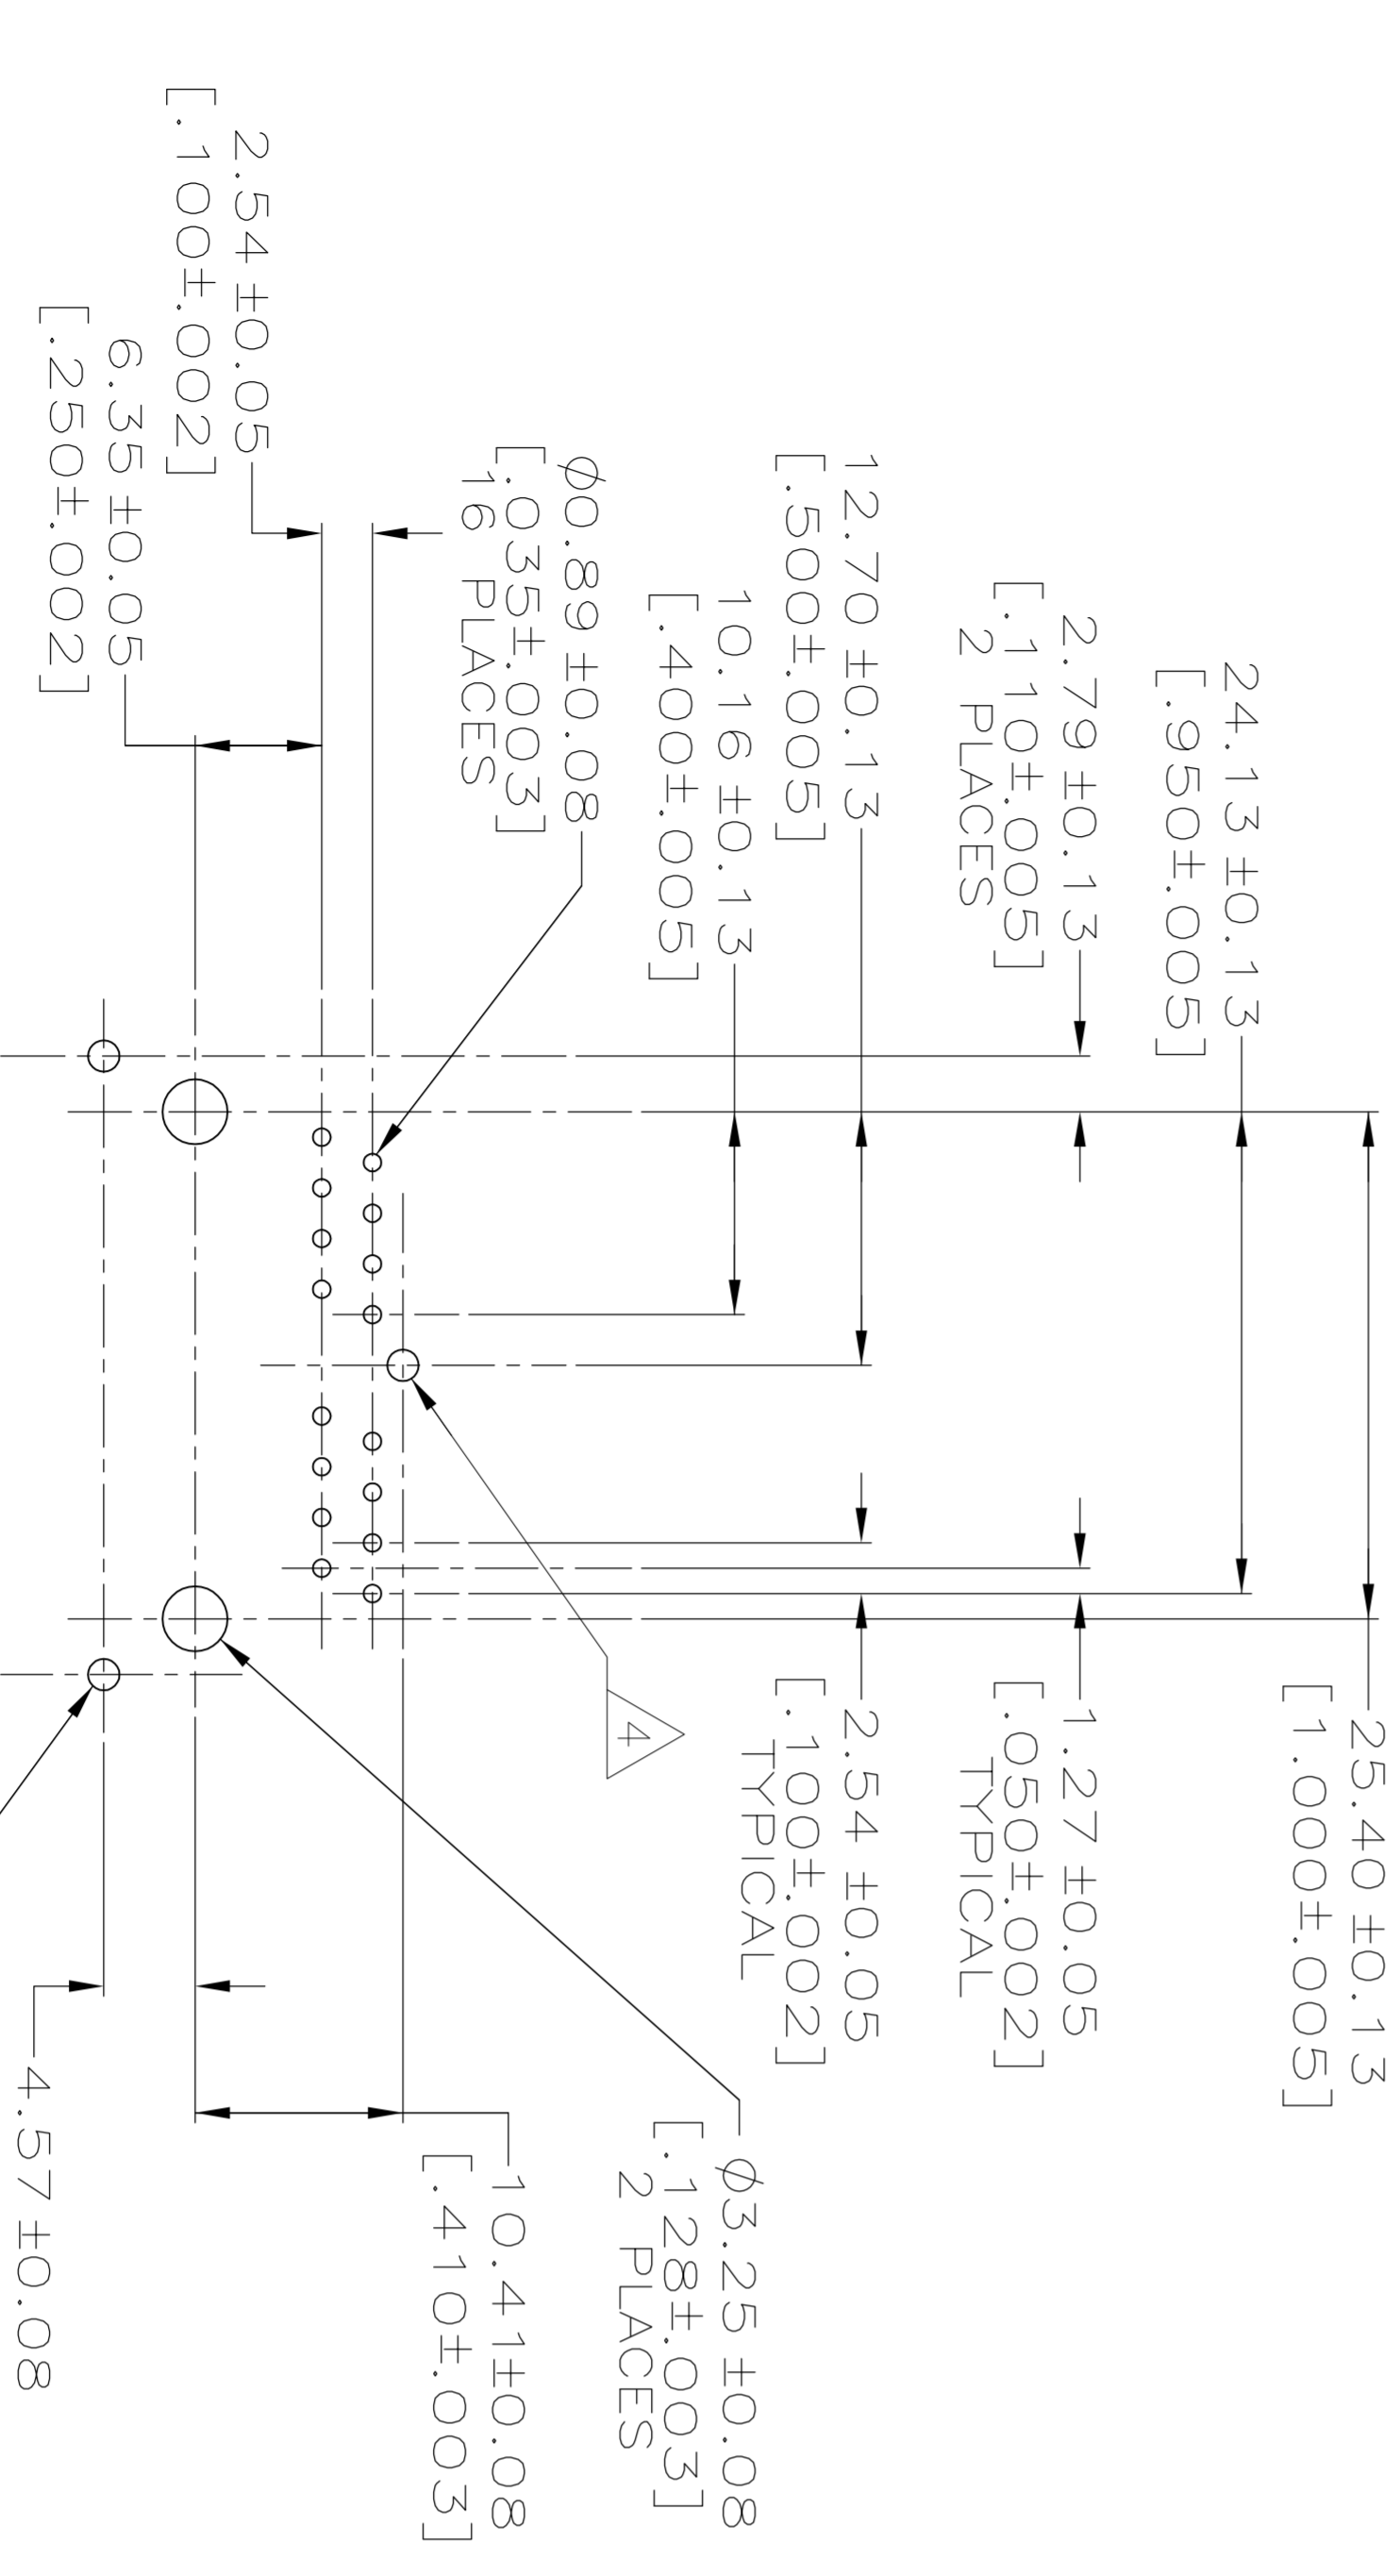

SUGGESTED PANEL CUTOUT
SCALE 2:1

SUGGESTED PC BOARD LAYOUT
COMPONENT SIDE
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES, UNLESS OTHERWISE SPECIFIED:
mm[inches]	
0 Plc	± -
1 Plc	± -
2 Plc	± 0.25[0.01]
3 Plc	± 0.15[0.005]
ANGLES	± -

MATERIAL	FINISH
△	△

DESCRIPTION	PART NO.
WITH REAR PCB GROUND TAB	5406562-2
WITHOUT REAR PCB GROUND TAB	5406562-1

OWN	16JUN2005
U. ALCORTA - DOCK3	
CHK	16JUN2005
J. WESTMAN	
APP'D	16JUN2005
S. FLICKINGER	
PRODUCT SPEC	
108-1163	
APPLICATION SPEC	
114-2048	
WEIGHT	

NAME	MODULAR JACK ASSEMBLY,
	2 PORT, 8 POSITION,
	RIGHT ANGLE, SHIELDED, CAT 4
SIZE	A2
CAGE CODE	00779
DRAWING NO	5406562
RESTRICTED TO	
CUSTOMER DRAWING	
SCALE	4:1
SHEET	1
OF	1
REV	B

LOC	DIST	REVISIONS	DATE	OWN	APP'D
AA	22				
P	UTR	DESCRIPTION			
B		REV PER ECR-08-032447	18FEB2009	DZ	SY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5406562-1](#)