




DUAL-IN-LINE SOCKETS

SERIES 110...605 • AUTOMATIC INSERTION • OPEN FRAME

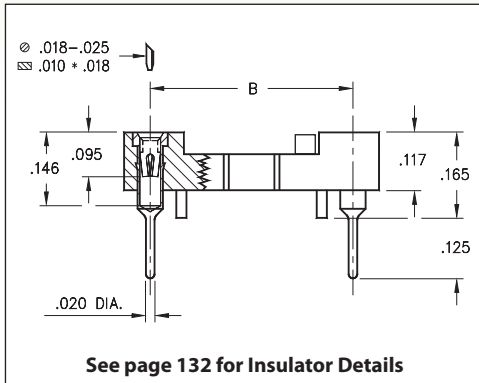

- High temperature thermoplastic insulator with standoffs is compatible with standard automatic insertion equipment and all soldering processes
- Soft copper alloy machined pins allow clinching. Chamfered contact entry allows for ease of IC insertion without bent leads
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Series 110 uses MM #1005 pins. See page 166 for details
- For Electrical, Mechanical and Environmental Data, see page 264 for details

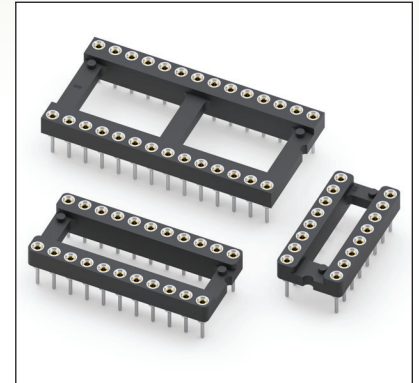

Total number of pins				Quantity per tube	ORDERING INFORMATION							
	A	B	C									
6	0.3	0.3	0.4	67	110-XX-306-41-605000							
8	0.4	0.3	0.4	50	110-XX-308-41-605000							
14	0.7	0.3	0.4	28	110-XX-314-41-605000							
16	0.8	0.3	0.4	25	110-XX-316-41-605000							
18	0.9	0.3	0.4	22	110-XX-318-41-605000							
20	1.0	0.3	0.4	20	110-XX-320-41-605000							
24	1.2	0.3	0.4	16	110-XX-324-41-605000							
22	1.1	0.4	0.5	18	110-XX-422-41-605000							
24	1.2	0.6	0.7	16	110-XX-624-41-605000							
28	1.4	0.6	0.7	14	110-XX-628-41-605000							
32	1.6	0.6	0.7	12	110-XX-632-41-605000							
40	2.0	0.6	0.7	10	110-XX-640-41-605000							
					XX=Plating Code See Below				RoHS-2 2011/65/EU			
SPECIFY PLATING CODE XX =						91	93		41 	43 	47 	
Sleeve (Pin) 						200 μ" Sn/Pb	200 μ" Sn/Pb		200 μ" Sn	200 μ" Sn	200 μ" Sn	
Contact (Clip) 						10 μ" Au	30 μ" Au		10 μ" Au	30 μ" Au	Au Flash	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[110-43-640-41-605000](#) [110-43-632-41-605000](#) [110-43-628-41-605000](#) [110-43-624-41-605000](#) [110-43-422-41-605000](#) [110-43-324-41-605000](#) [110-43-320-41-605000](#) [110-43-318-41-605000](#) [110-43-316-41-605000](#) [110-43-314-41-605000](#) [110-43-308-41-605000](#) [110-43-306-41-605000](#) [110-93-308-41-605000](#) [110-93-640-41-605000](#) [110-93-632-41-605000](#) [110-93-628-41-605000](#) [110-93-624-41-605000](#) [110-93-422-41-605000](#) [110-93-324-41-605000](#) [110-93-320-41-605000](#) [110-93-318-41-605000](#) [110-93-316-41-605000](#) [110-93-314-41-605000](#) [110-93-306-41-605000](#)