

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0877159307

Status:


Active

Overview:

PCI Express* Card Edge Connector

Description:

1.00mm Pitch, PCI Express Connector, 164 Circuits, Nylon 4/6 Glass-filled, Black Housing, Phosphor Bronze, Gold Solder-tail, Lead-Free

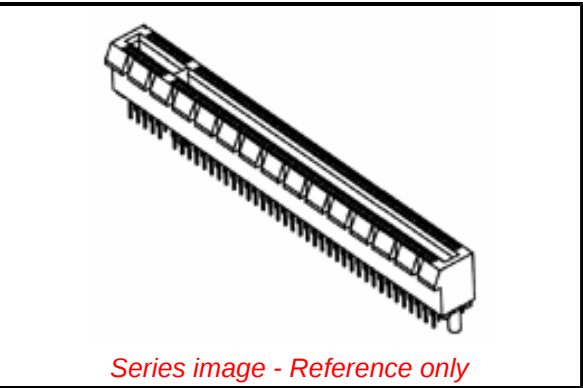

Documents:	
Drawing (PDF)	Packaging Specification PK-87715-207 (PDF)
Product Specification PS-87715-200-001 (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification TS-87715-207-001 (PDF)	

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Edge Card Connectors
Series	87715
Comments	PCI 16 lanes
Component Type	Edgecard to PCB
Data Rate	8.0 Gbps
Edge Card Thickness	1.57mm
Electrical Model	Yes
High Power Bay (30.0A or more)	No
Orientation	Vertical
Overview	PCI Express* Card Edge Connector
Product Name	PCI Express
Standard Based	PCIe
UPC	822348666225
Physical	
(p)ower-(s)ignal Configuration	164s - 0p
Circuit Size Range	65-200 Circuits
Circuits (Loaded)	164
Circuits (maximum)	164
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Keying to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	8.688/g
PC Tail Length	2.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	1.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	0.051µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/30/2017 (7 July 2017)	
Halogen-Free	
Status	
Not Low-Halogen	
Need more information on product environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

87715 Series

Mates With

PCI Express Card

Electrical

Current - Maximum per Contact	1.1A
Voltage - Maximum	50V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	WAVE
Process Temperature max. C	245

Material Info

Reference - Drawing Numbers

Electrical Model Document	EE-87715-002, EE-87715-011, EE-87715-012, EE-87715-013, EE-87715-014
Packaging Specification	PK-87715-207
Product Specification	PS-87715-200-001, TS-87715-207-001
S-Parameter Model	SP-87715-002, SP-87715-011, SP-87715-012, SP-87715-013, SP-87715-014
Sales Drawing	SD-87715-207
Signal Integrity Report	SI-87715-002

This document was generated on 07/23/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[87715-9307](#)