


LOC	DIST	REVISIONS 変更				DATE	DWN	APVD
J		P	LTR	DESCRIPTION				
			H3	REVISED PER ECO-13-012188		05AGU13	B.P	D.Z

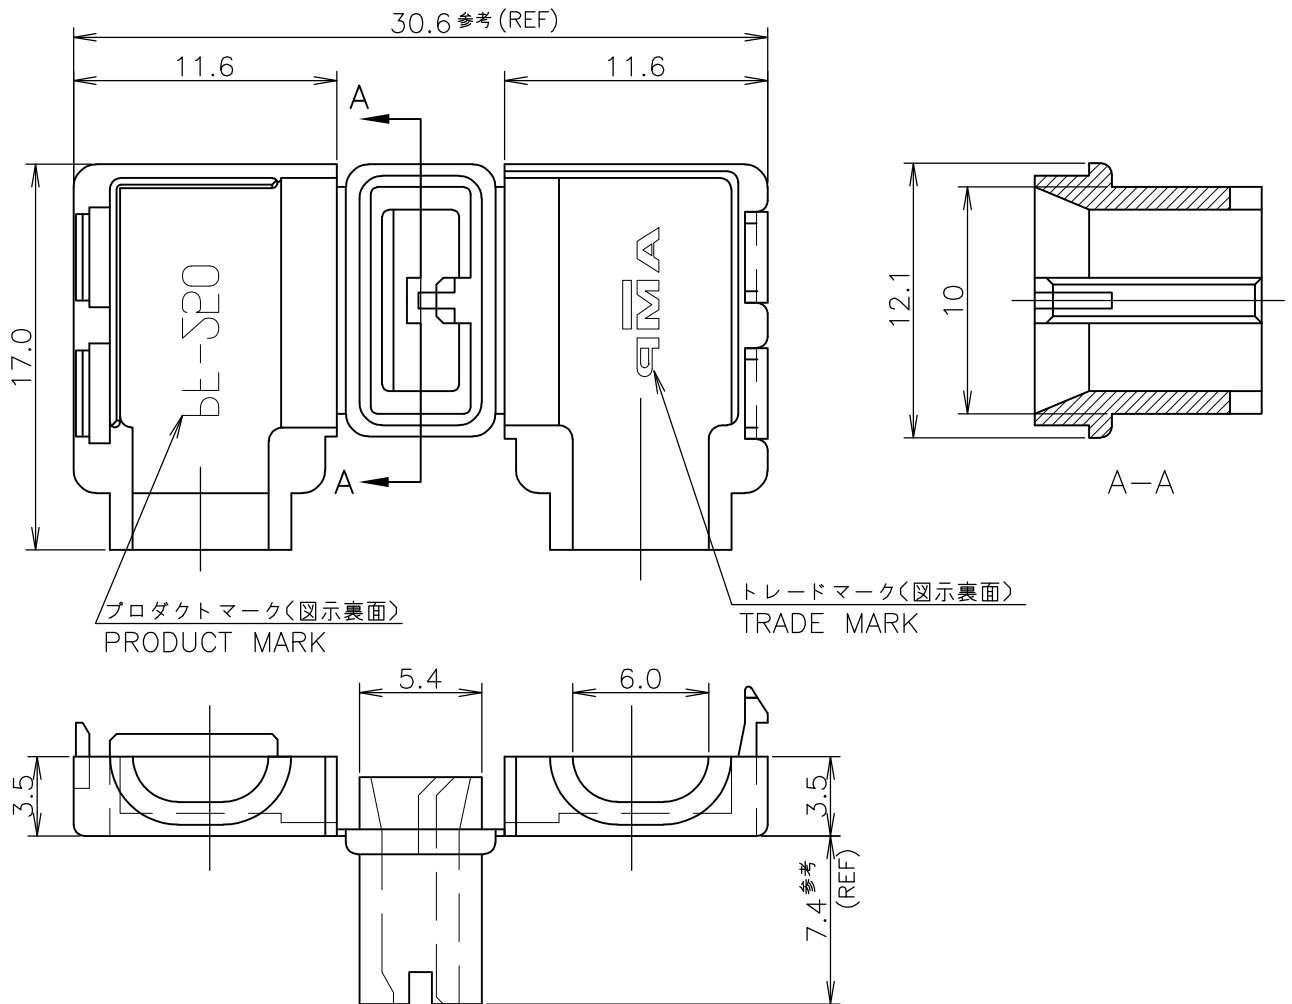

1 APPLICABLE CONTACT P/N: 175057-1

△ OBSOLETE PARTS: OBSOLETE CIS STERAMLINING PER D.RENAUD/D.SINSI

1 適用端子型番: 175057-1

GWT,94V-0	自然色 (NATURAL)	7-176497-1
94V-0	黒 (BLACK)	1-176497-9
94V-0	赤 (RED)	1-176497-7
94V-0	青 (BLUE)	1-176497-6
94V-0	黄 (YELLOW)	1-176497-4
94V-0	自然色 (NATURAL)	1-176497-1
94V-2	黒 (BLACK)	176497-9
94V-2	自然色 (NATURAL)	176497-1
UL GRADE	色 (COLOR)	型番 (P/N)


GENERAL TOLERANCE
一般公差

10 $\geq$: ± 0.2
30 $\geq$ > 10: ± 0.25
100 $\geq$ > 30: ± 0.3
ANGLES: $\pm 3^\circ$

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC $\pm$ -
1 PLC $\pm$ -
2 PLC $\pm$ -
3 PLC $\pm$ -
4 PLC $\pm$ -
ANGLES $\pm$ -



DWN	Y.FUJITA	10NOV1989
CHK	Y.FUJITA	10NOV1989
APVD	N.ONOUE	11NOV1989
PRODUCT SPEC	製品規格	
APPLICATION SPEC	取付適用規格	
WEIGHT		

WIRE RANGE 抱合電線断面積		INSULATION DIA 被覆外径	
mm ²		2.8~4.2 mm ϕ	
MATERIAL 材料	6/6ナイロン (表参照) 6/6 NYLON (SEE TABLE)	FINISH 仕上	
 TE Connectivity			
NAME 名称			
ワンタッチスリーブ (250シリーズ旗型ポジティブロック-EX用) ONE TOUCH SLEEVE 250 SERIES FLAG POSITIVE LOCK-EX			
SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A4	00779	C-176497	

CUSTOMER DRAWING

SCALE 尺度 NTS SHEET 1 OF 1 REV H3

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

By -

© COPYRIGHT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[176497-9](#)