



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	Mar.29/06	L.CHAN

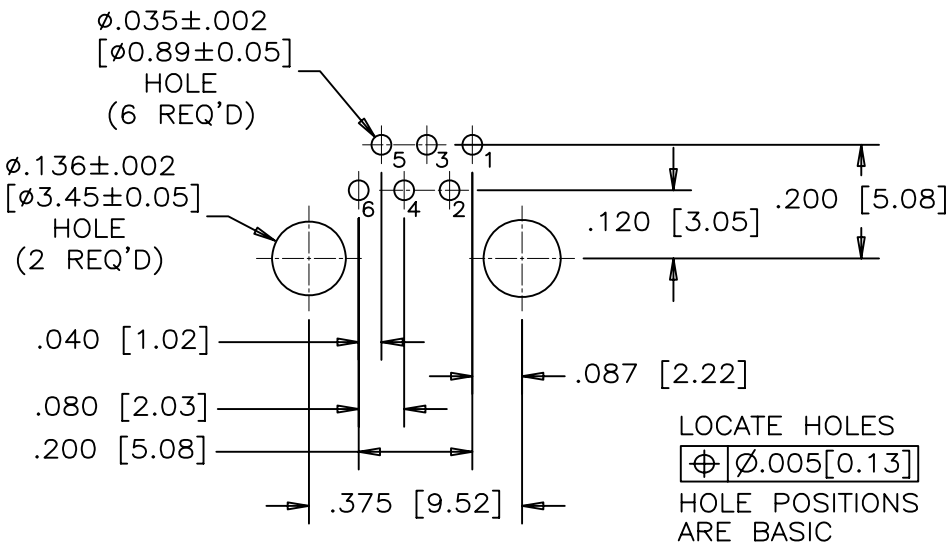


MATERIALS:

- PLASTIC HOUSING:
 HIGH TEMPERATURE RESISTANT NYLON  
 UL FLAMMABILITY RATING 94V-0.  
 INFRA-RED OVEN COMPATIBLE
- CONTACTS:
 PHOSPHOR BRONZE
- CONTACT PLATING:
 50 MICROINCHES [1.27 MICRONS] MINIMUM NICKEL.  
 50 MICROINCHES [1.27 MICRONS] MINIMUM GOLD  
 ON MATING SURFACES  
 100 MICROINCHES [2.54 MICRONS] MATTE TIN  
 ON CONTACT TAILS.
- RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING OR REFLOW SOLDERING AT 260°C  
 MAXIMUM FOR 5 SEC MAXIMUM.

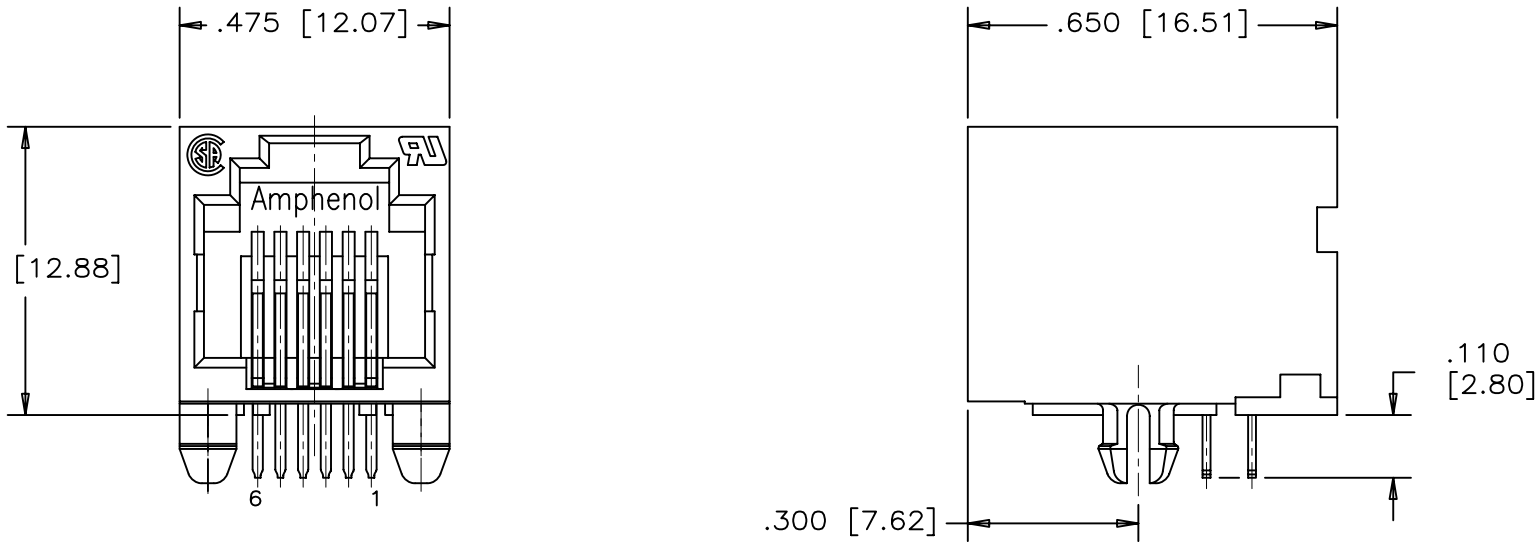

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)

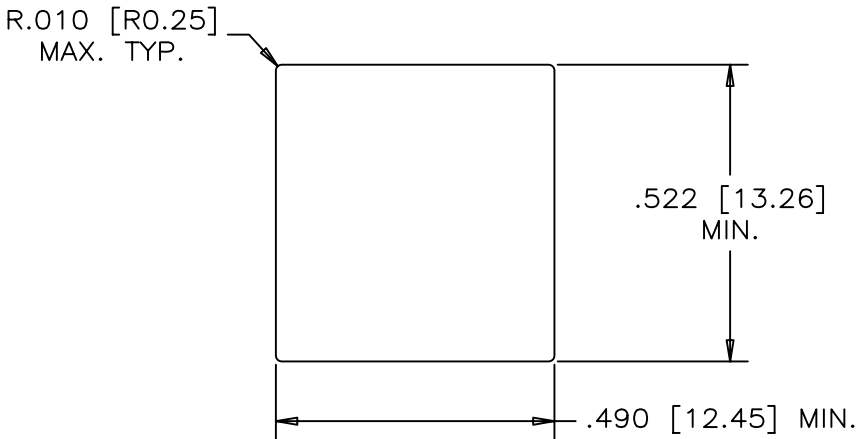

RECOMMENDED PANEL CUTOUT

PART NUMBER: RJE01-6X0-01

- CONTACT QTY.
- 2=2 CONTACTS
  - 4=4 CONTACTS
  - 6=6 CONTACTS

DRAWN PAUL WANG DESIGNED CHECKED CHIGOW I. E. APPRD. Q. A. APPRD. DWG. APPRD. ENG. REL. NO. REF. DIMENSIONS ARE IN INCHES [mm]	DATE 06/03/29 06/03/29	Amphenol Canada Corp.
TITLE HIGH SPEED MODULAR JACK,1 PORT, 6 POSITIONS,OPTIONAL CONTACTS, WITHOUT SHIELD – RoHS COMPLIANT		REV. A
DWG C	DRAWING NO. P-RJE01-6X0-01	SCALE WT. ----- SURF. -----
CODE ID. NO. 03554		SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION  
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING  
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RJE01-660-01](#)