

# Features

- High isolation 2W converter
- 3kVDC/1s and 4kVDC/1s basic isolation
- UL94V-0 package material
- Optional continuous short circuit protected
- Efficiency up to 84%
- Suitable for IGBT applications

# Unregulated Converters

## RKZ

**2 Watt  
SIP7  
Single and  
Dual Output**




### Description

The RKZ Series of 2W DC/DC Converters are certified to EN60950-1. This makes them suitable for high end industrial applications such as IGBT driver circuitry. The RKZ converters are pin-compatible with the RK and RH converter series, offering a simple way to upgrade a 1W high isolation supply to 2W.

### Selection Guide

Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. <sup>(1)</sup> [%]	max. Capacitive Load <sup>(2)</sup> [µF]
RKZ-xx05S <sup>(3,4)</sup>	5, 12, 24	5	400	82-84	1500
RKZ-xx12S <sup>(3,4)</sup>	5, 12, 24	12	168	82-87	330
RKZ-xx15S <sup>(3,4)</sup>	5, 12, 24	15	132	82-84	330
RKZ-xx05D <sup>(3,4)</sup>	5, 12, 24	±5	±200	70-83	±680
RKZ-xx12D <sup>(3,4)</sup>	5, 12, 24	±12	±84	82-84	±220
RKZ-xx15D <sup>(3,4)</sup>	5, 12, 24	±15	±66	82-88	±220
RKZ-xx1509D <sup>(3,4)</sup>	5, 12, 24	+15/-9	+67/-111	70-81	±330




#### Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient  
 Note2: Max Cap Load is tested at nominal input and full resistive load and is defined as the capacitive load that will allow start up in under 1s without damage to the converter

IEC/EN60950-1 certified  
 IEC/EN60601-1 certified  
 EN55032 compliant

### Model Numbering

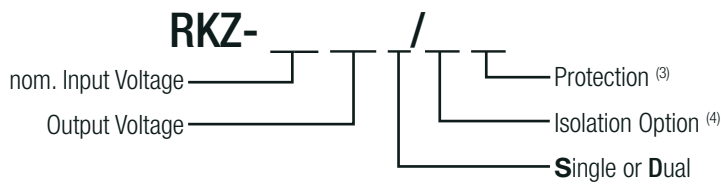

#### Notes:

- Note3: standard part is without Continuous Short Circuit Protection  
 add suffix „/P“ for Continuous Short Circuit Protection  
 Note4: add suffix „/H“ for 4kVDC/1s Isolation  
 or add suffix „/HP“ for 4kVDC/1s Isolation and Continuous Short Circuit Protection

#### Ordering Examples:

RKZ-0515S/P: 5VDC Input Voltage, 15VDC Output Voltage, Single Output with continuous short circuit protection  
 RKZ-0515D/HP: 5VDC Input Voltage, ±15VDC Output Voltage, Dual Output with continuous short circuit protection and 4kVDC/1s isolation







[www.recom-power.com/eval-ref-boards](http://www.recom-power.com/eval-ref-boards)

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

### BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Internal Input Filter				capacitor
Input Voltage Range			±10%	
Minimum Load		0%		
Internal Operating Frequency	all others RKZ-xx1509D	20kHz 20kHz	50kHz 51kHz	85kHz
Output Ripple and Noise	20MHz BW			150mVp-p



### Efficiency vs. Load

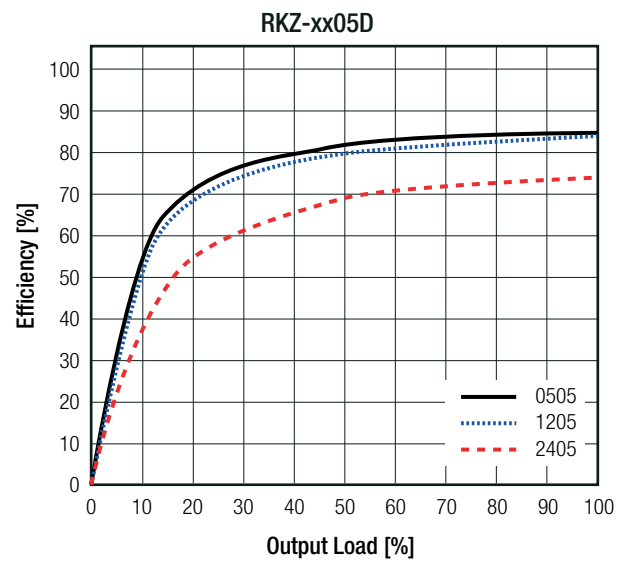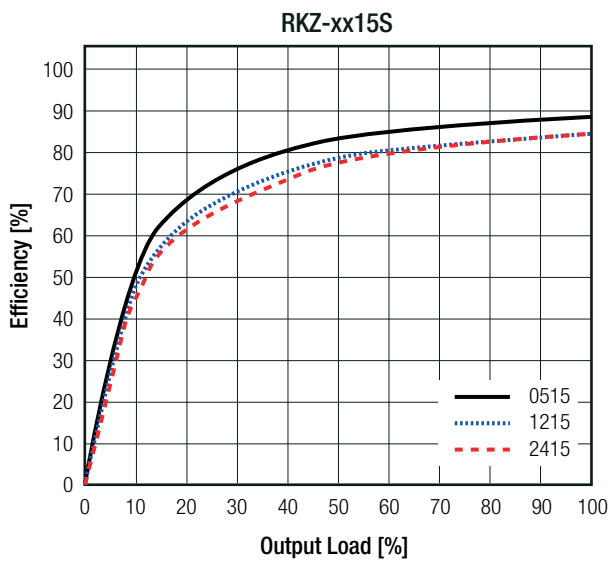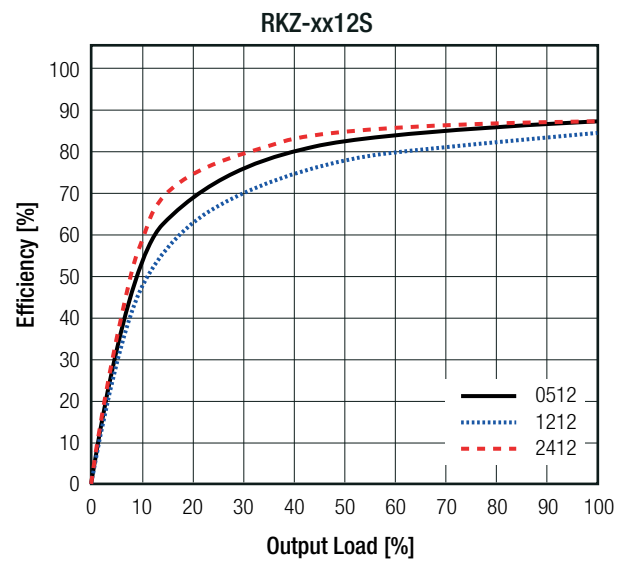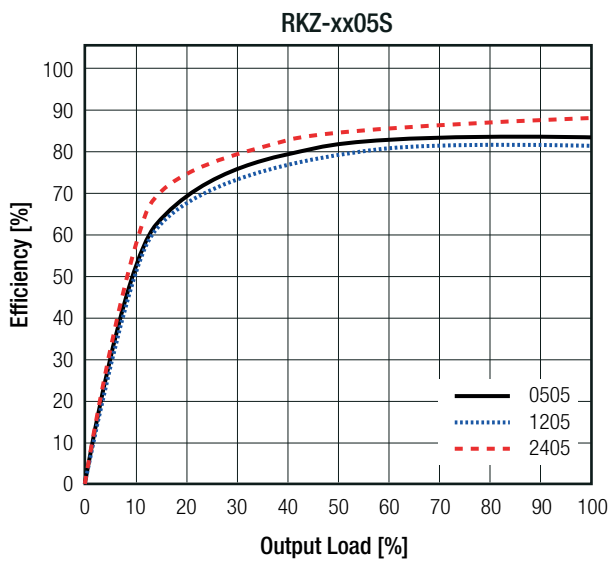

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Efficiency vs. Load

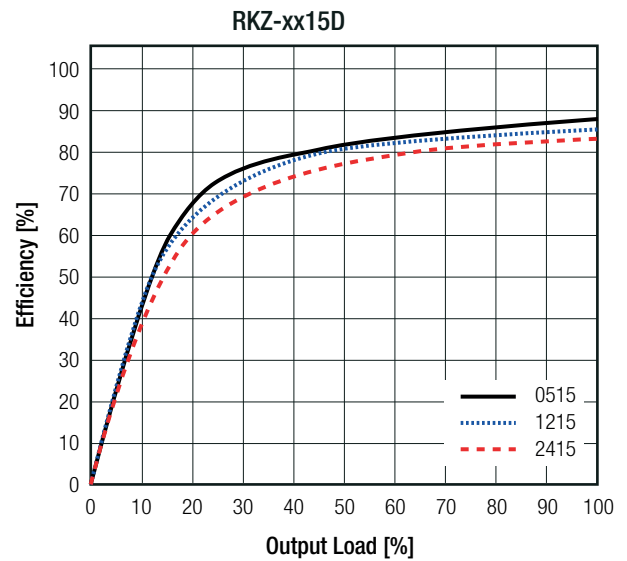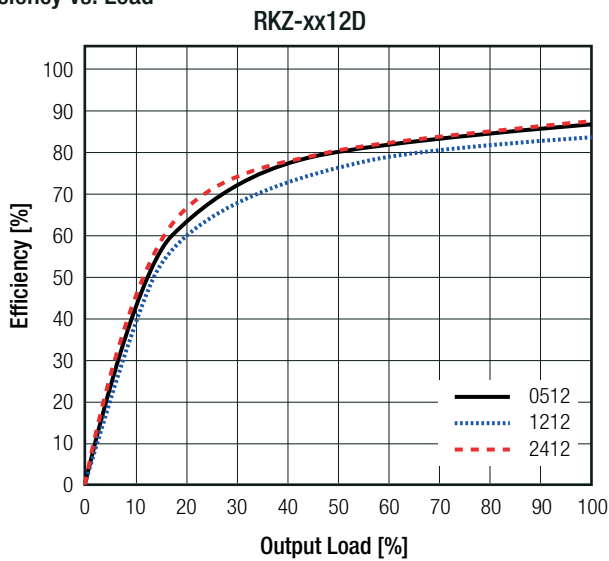



## REGULATIONS

Parameter	Condition		Value
Output Accuracy			±5.0% max.
Line Regulation	low line to high line		±1.2% of 1.0% Vin typ.
Load Regulation <sup>(5)</sup>	10% to 100% load	5Vout 12, 15, 24Vout and RKZ-xx1509D	15.0% max. 10.0% max.

**Notes:**

Note5: Operation below 10% load will not harm the converter, but specifications may not be met





Deviation vs. Load

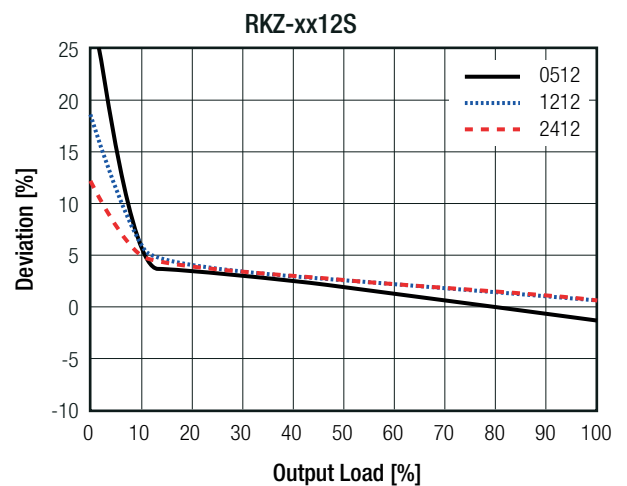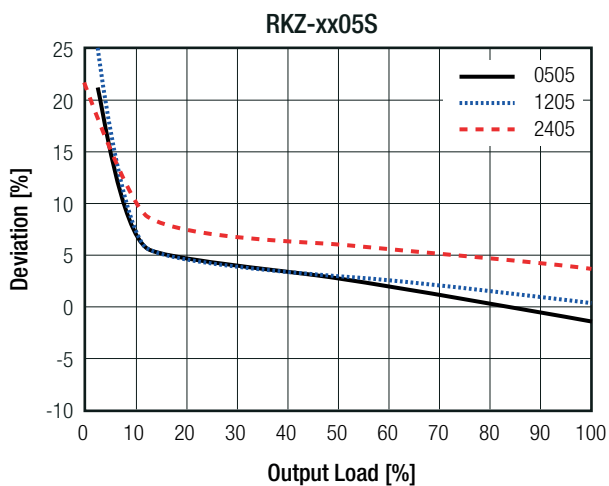

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Deviation vs. Load

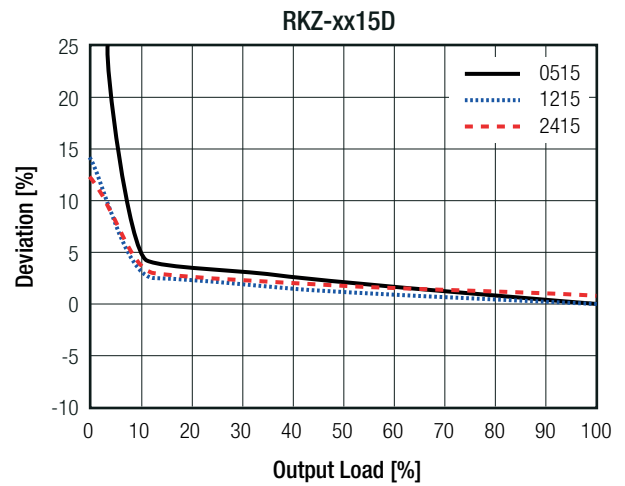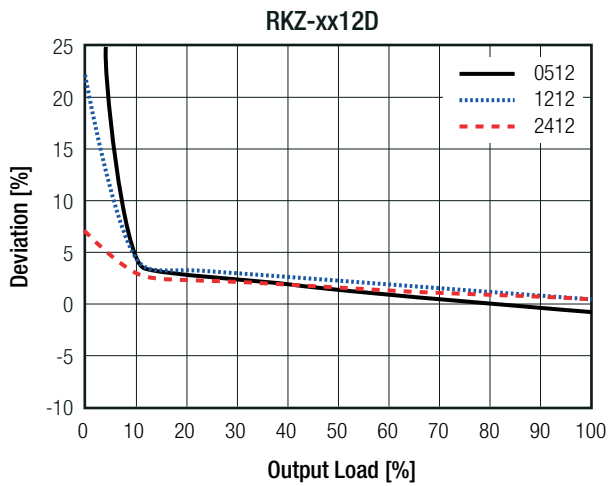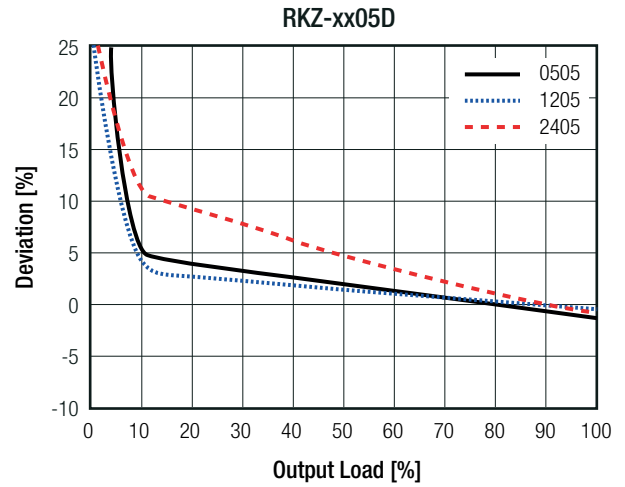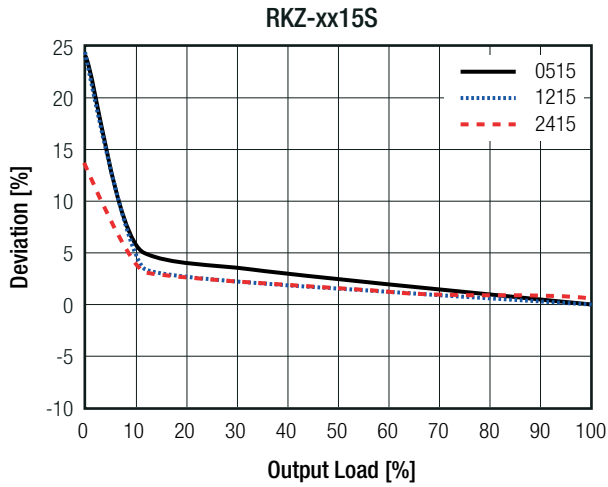


PROTECTIONS			
Parameter	Type		Value
Short Circuit Protection (SCP)	without suffix with suffix "/P"		1 second continuous
Isolation Voltage <sup>(6)</sup>	I/P to O/P	without suffix	tested for 1 second rated for 1 minute 3kVDC 1.5kVAC / 60Hz
		with suffix "/H"	tested for 1 second rated for 1 minute 4kVDC 2kVAC / 60Hz
Isolation Resistance			10GΩ min.
Isolation Capacitance			120pF max.
Insulation Grade			basic (IEC/EN60950-1) functional (IEC/EN60601-1)
<p><b>Notes:</b></p> <p>Note6: For repeat Hi-Pot testing, reduce the time and/or the test voltage</p> <p>Note7: Refer to local safety regulations if input over-current protection is required. Recommended fuse: slow blow type</p>			

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**ENVIRONMENTAL**

Parameter	Condition		Value
Operating Temperature Range	full load @ free air convection (see graph)		-40°C to +85°C
Maximum Case Temperature			+110°C
Temperature Coefficient			±0.03%/K typ.
Thermal Impedance			40K/W typ.
Operating Altitude			3000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	18300 x 10 <sup>3</sup> hours
		+85°C	8070 x 10 <sup>3</sup> hours

**Derating Graph**  
(@ free air convection)

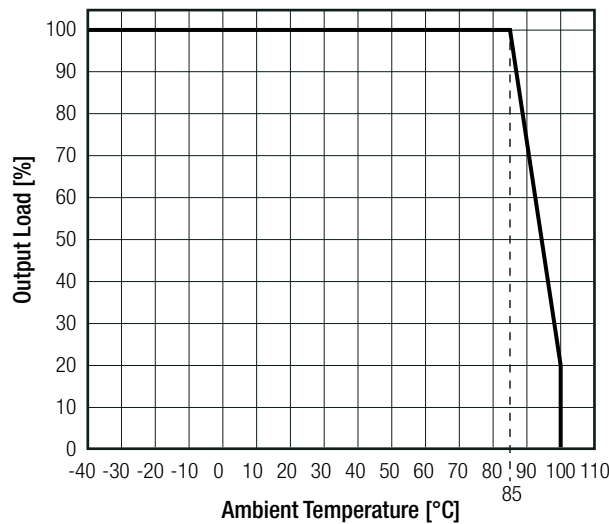

**SAFETY AND CERTIFICATIONS**

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	SPCLVD1602031	IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013
Medical electrical equipment Part 1: General requirements for basic safety and essential performance	WD-SE-R-180676-A0 <sup>(®)</sup>	IEC60601-1:2005 + A1:2012, 3rd Edition EN60601-1:2006 + A1:2013 + A12:2014
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2+		RoHS-2011/65/EU + AM-2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class B EN55032, Class A


**Notes:**

Note8: excluded +15/-9 version

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**EMC Filter Suggestion according to EN55032**

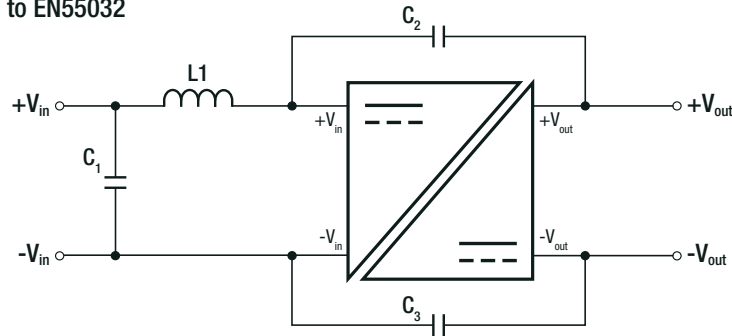

**Component List Class A**

MODEL	C1	L1	C2 (safety)	C3 (safety)
RKZ-0505S	10µF 100V MLCC	N/A	N/A	N/A
RKZ-1205S				
RKZ-2405S				

**Component List Class B**

MODEL	C1	L1	C2 (safety)	C3 (safety)
RKZ-0505S	10µF 100V MLCC	12µH choke RLS-126	470pF	1nF
RKZ-1205S		22µH choke RLS-226		
RKZ-2405S		22µH choke RLS-226		



**Notes:**

Note9: Filter suggestions are valid for indicated part numbers only. For other part numbers, please contact RECOM tech support for advice

**DIMENSION AND PHYSICAL CHARACTERISTICS**

Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic (UL94 V-0) epoxy, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)		19.65 x 7.05 x 10.2mm
Weight		2.8g typ.

**Dimension Drawing (mm)**

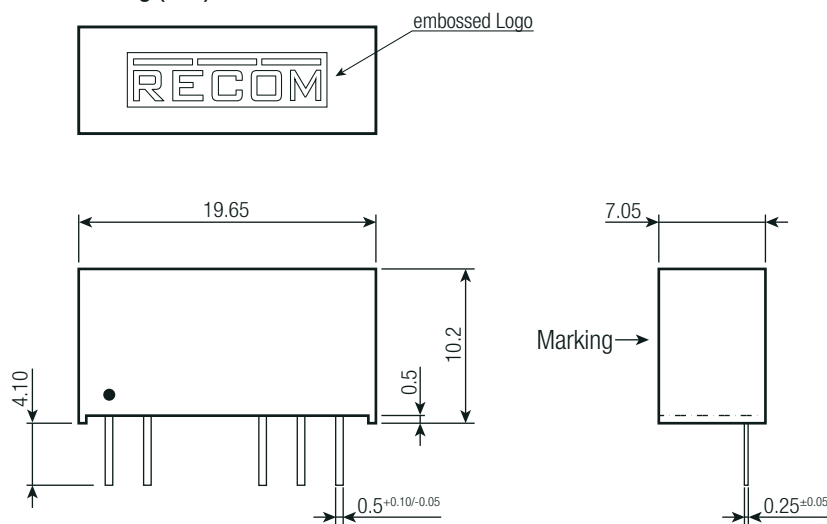


**Pinning information**

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	no pin	Com
7	+Vout	+Vout

Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm


**Recommended Footprint Details**

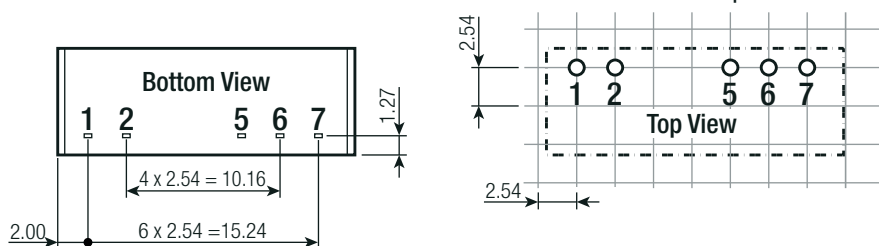

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**INSTALLATION AND APPLICATION**

**IGBT Application Circuit**

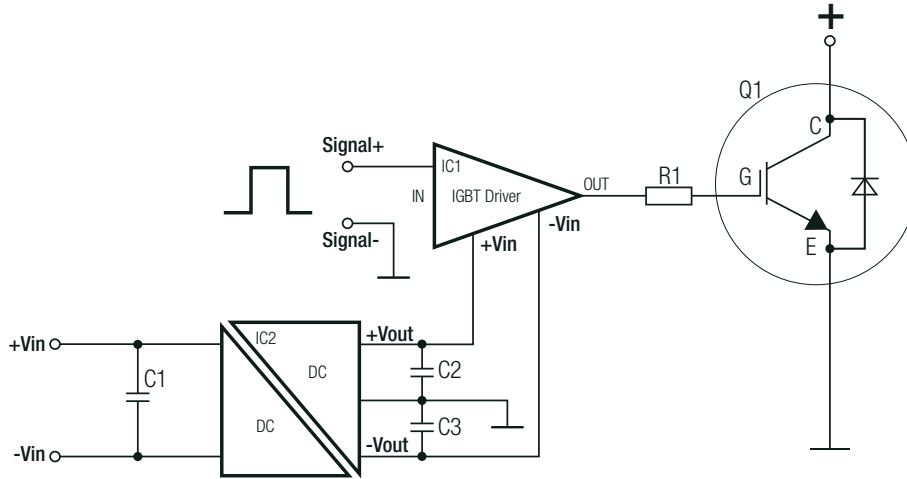

**PACKAGING INFORMATION**

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 16.0 x 9.0mm
Packaging Quantity	tube	25pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity	non-condensing	95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[RKZ-0505D](#) [RKZ-0505S](#) [RKZ-0505D/H](#) [RKZ-0505D/HP](#) [RKZ-0505D/P](#) [RKZ-0505S/H](#) [RKZ-0505S/HP](#) [RKZ-0505S/P](#) [RKZ-0512D/H](#) [RKZ-0512D/HP](#) [RKZ-0512D/P](#) [RKZ-0512S/H](#) [RKZ-0512S/HP](#) [RKZ-0512S/P](#) [RKZ-0515D](#) [RKZ-0515D/H](#) [RKZ-0515D/HP](#) [RKZ-0515D/P](#) [RKZ-0515S](#) [RKZ-0515S/H](#) [RKZ-0515S/HP](#) [RKZ-0515S/P](#) [RKZ-1205D](#) [RKZ-1205D/H](#) [RKZ-1205D/HP](#) [RKZ-1205D/P](#) [RKZ-1205S/H](#) [RKZ-1205S/HP](#) [RKZ-1205S/P](#) [RKZ-1212D](#) [RKZ-1212D/H](#) [RKZ-1212D/HP](#) [RKZ-1212D/P](#) [RKZ-1212S/H](#) [RKZ-1212S/HP](#) [RKZ-1212S/P](#) [RKZ-1215D](#) [RKZ-1215D/H](#) [RKZ-1215D/HP](#) [RKZ-1215D/P](#) [RKZ-1215S](#) [RKZ-1215S/H](#) [RKZ-1215S/HP](#) [RKZ-1215S/P](#) [RKZ-0512D](#) [RKZ-0512S](#) [RKZ-1205S](#) [RKZ-1212S](#) [RKZ-051509D](#) [RKZ-051509D/H](#) [RKZ-051509D/HP](#) [RKZ-051509D/P](#) [RKZ-121509D](#) [RKZ-121509D/H](#) [RKZ-121509D/HP](#) [RKZ-121509D/P](#) [RKZ-241509D](#) [RKZ-241509D/H](#) [RKZ-241509D/HP](#) [RKZ-241509D/P](#) [RKZ-2412S/P](#) [RKZ-2405D/H](#) [RKZ-2412D/H](#) [RKZ-2415D/H](#) [RKZ-2405S/H](#) [RKZ-2412S/H](#) [RKZ-2415S/H](#) [RKZ-2405S](#) [RKZ-2412S](#) [RKZ-2415S](#) [RKZ-2405D](#) [RKZ-2412D](#) [RKZ-2415D](#) [RKZ-2412S/HP](#) [RKZ-2412D/P](#) [RKZ-2415S/P](#) [RKZ-2405S/P](#) [RKZ-2415S/HP](#) [RKZ-2405D/P](#) [RKZ-2412D/HP](#) [RKZ-2405S/HP](#) [RKZ-2415D/HP](#) [RKZ-2405D/HP](#) [RKZ-2415D/P](#)