



LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AB5	REVISED PER ECO-13-005565	02APR13	KH	JO

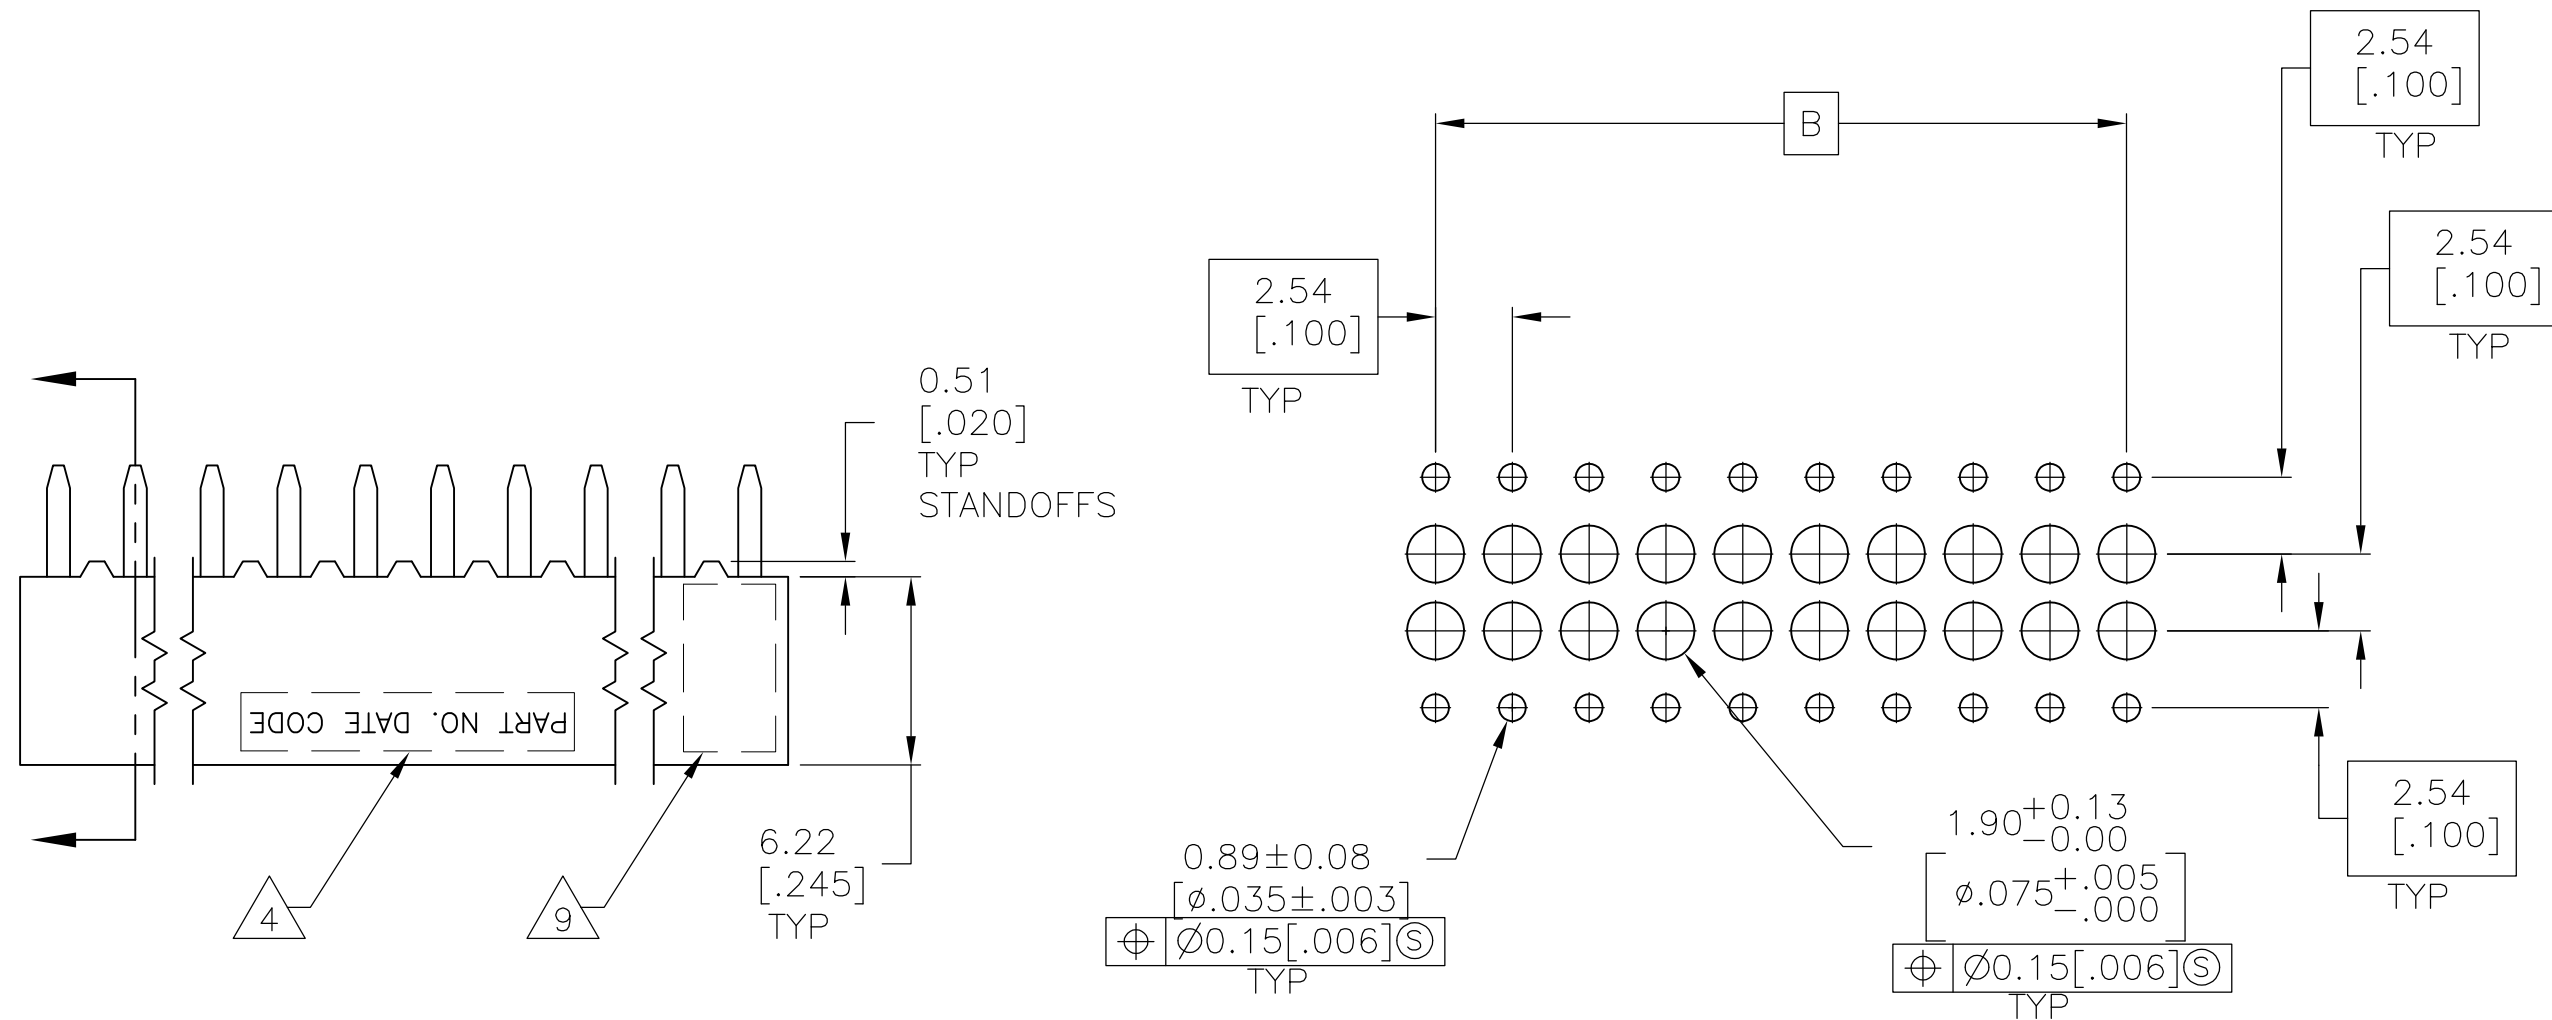


 ROHS 2002/95/EC COMPLIANT

RECOMMENDED PC BOARD HOLE PATTERN
PC BOARD THICKNESS 1.57[.062]

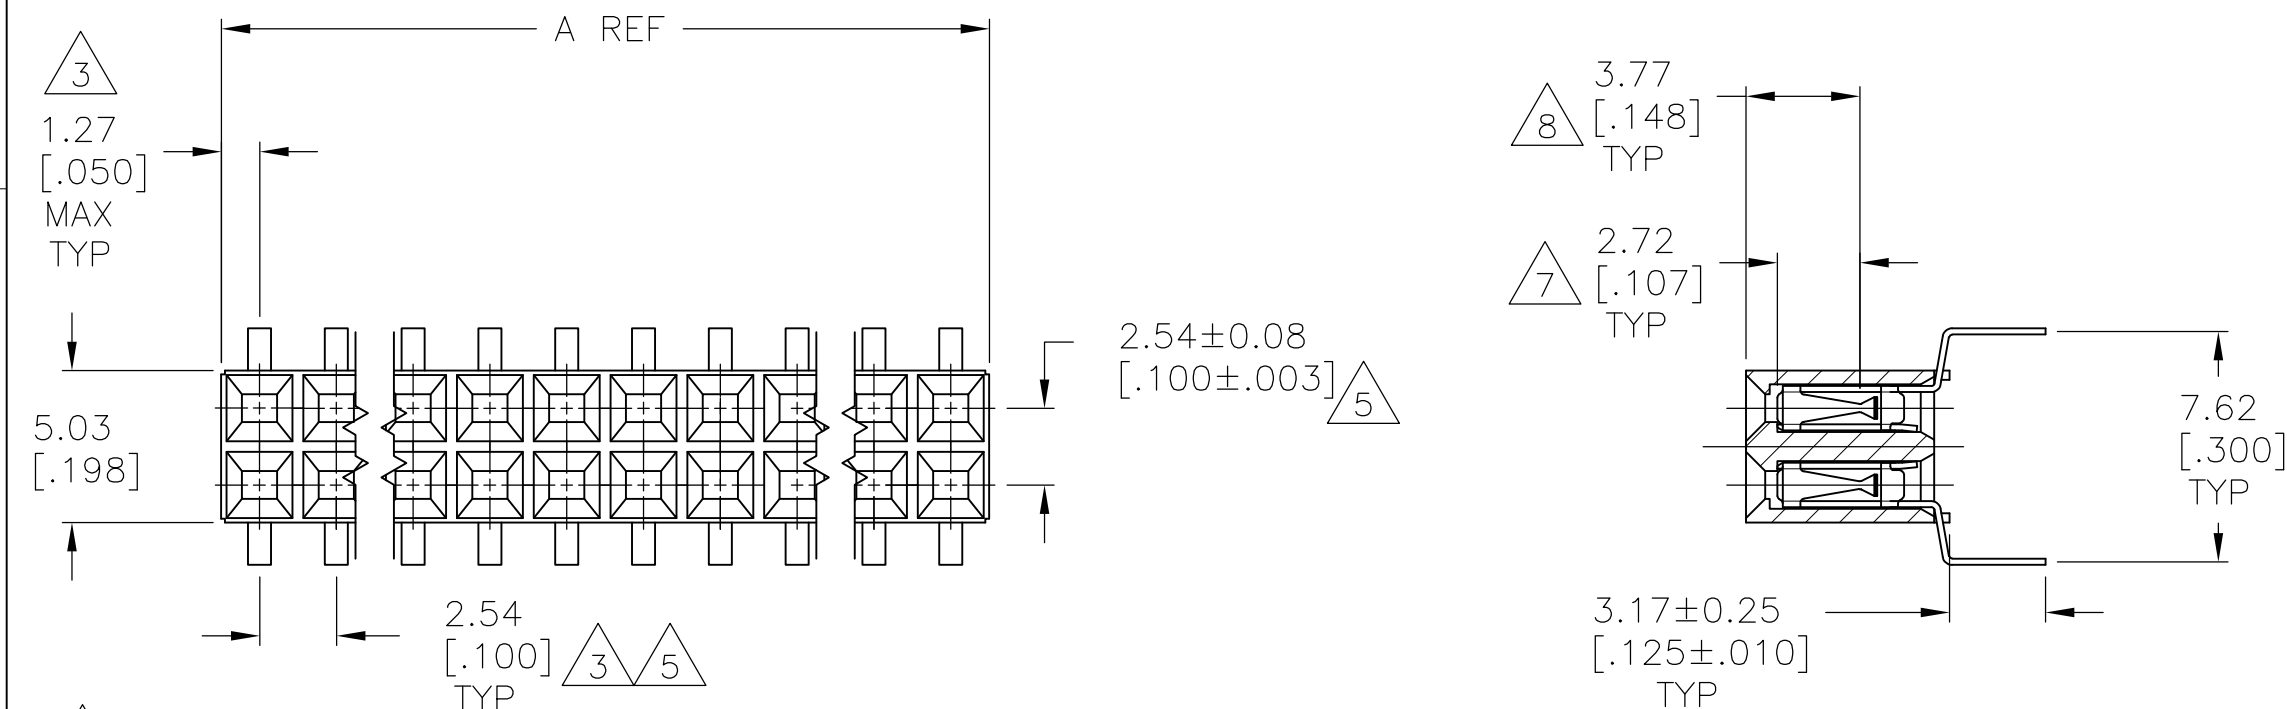

- 1 HOUSING: FLAME RETARDANT, GLASS FILLED, POLYESTER, COLOR: BLACK. CONTACT: PHOSPHOR BRONZE
- 2 CONTACT: DUPLEX PLATED 0.76 μ m[.000030] GOLD IN CONTACT AREA, 3.81–7.62 μ m[.000150–.000300] BRIGHT TIN–LEAD ON LEADS, ALL OVER 1.27 μ m[.000050] MINIMUM NICKEL
- 3 THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY – NOT TO CONTACT LOCATIONS
- 4 PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN,EITHER SIDE.
- 5 TOLERANCE IS NON–CUMULATIVE.
- 6 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE CONNECTIVITY LOGO.
- 7 POINT–OF–MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- 8 POINT–OF–CONTACT DIMENSION.
- 9 TE CONNECTIVITY TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- 10 NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 11 CONTACT:DUPLEX PLATED 0.76 MICROMETERS(.000030) MIN GOLD IN CONTACT AREA,3.81–7.62 MICROMETERS(.000150–.000300) MATTE TIN ON LEADS, ALL OVER 1.27 MICROMETERS (.000050) MINIMUM NICKEL.


SUPERSEDED BY 8-534267-4		96.52[3.800]	99.06[3.900]	78	4-534267-0	
		91.44[3.600]	93.98[3.700]	74	3-534267-9	
		88.90[3.500]	91.44[3.600]	72	3-534267-8	
		86.36[3.400]	88.90[3.500]	70	3-534267-7	
		83.82[3.300]	86.36[3.400]	68	3-534267-6	
		81.28[3.200]	83.82[3.300]	66	3-534267-5	
		78.74[3.100]	81.28[3.200]	64	3-534267-4	
		76.20[3.000]	78.74[3.100]	62	3-534267-3	
		71.12[2.800]	73.66[2.900]	58	3-534267-2	
		68.58[2.700]	71.12[2.800]	56	3-534267-1	
		66.04[2.600]	68.58[2.700]	54	3-534267-0	
		63.50[2.500]	66.04[2.600]	52	2-534267-9	
		55.88[2.200]	58.42[2.300]	46	2-534267-8	
		53.34[2.100]	55.88[2.200]	44	2-534267-7	
		50.80[2.000]	53.34[2.100]	42	2-534267-6	
		45.72[1.800]	48.26[1.900]	38	2-534267-5	
		40.64[1.600]	43.18[1.700]	34	2-534267-4	
		38.10[1.500]	40.64[1.600]	32	2-534267-3	
		33.02[1.300]	35.56[1.400]	28	2-534267-2	
			25.40[1.000]	27.94[1.100]	22	2-534267-1
		12.70[.500]	15.24[.600]	12	2-534267-0	
		17.78[.700]	20.32[.800]	16	1-534267-9	
		60.96[2.400]	63.50[2.500]	50	1-534267-8	
		2.54[.100]	5.08[.200]	4	1-534267-7	
		93.98[3.700]	96.52[3.800]	76	1-534267-6	
		43.18[1.700]	45.72[1.800]	36	1-534267-5	
		5.08[.200]	7.62[.300]	6	1-534267-4	
				2.54[.100]	2	 1-534267-3-
			35.56[1.400]	38.10[1.500]	30	1-534267-2
 OBSOLETE		58.42[2.300]	60.96[2.400]	48	1-534267-1	
		20.32[.800]	22.86[.900]	18	1-534267-0	
		27.94[1.100]	30.48[1.200]	24	534267-9	
		73.66[2.900]	76.20[3.000]	60	534267-8	
		48.26[1.900]	50.80[2.000]	40	534267-7	
		30.48[1.200]	33.02[1.300]	26	534267-6	
			7.62[.300]	10.16[.400]	8	534267-5
			99.06[3.900]	101.60[4.000]	80	534267-4
			10.16[.400]	12.70[.500]	10	534267-3
			22.86[.900]	25.40[1.000]	20	534267-2
			15.24[.600]	17.78[.700]	14	534267-1
		FINISH	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 06NOV2002		 TE Connectivity	
		CHK J.OLSON 06NOV02			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, DUAL ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU	
		PRODUCT SPEC 108-25022			
MATERIAL		APPLICATION SPEC 114-25018			
FINISH 		WEIGHT -		SIZE A2	
				CAGE CODE 00779	
				DRAWING NO C-534267	
				RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 4:1 SHEET 1 of 2 REV AB5	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

			96.52[3.800]	99.06[3.900]	78		9-534267-0
			91.44[3.600]	93.98[3.700]	74		8-534267-9
			88.90[3.500]	91.44[3.600]	72		8-534267-8
			86.36[3.400]	88.90[3.500]	70		8-534267-7
			83.82[3.300]	86.36[3.400]	68		8-534267-6
			81.28[3.200]	83.82[3.300]	66		8-534267-5
			78.74[3.100]	81.28[3.200]	64		8-534267-4
			76.20[3.000]	78.74[3.100]	62		8-534267-3
			71.12[2.800]	73.66[2.900]	58		8-534267-2
			68.58[2.700]	71.12[2.800]	56		8-534267-1
			66.04[2.600]	68.58[2.700]	54		8-534267-0
			63.50[2.500]	66.04[2.600]	52		7-534267-9
			55.88[2.200]	58.42[2.300]	46		7-534267-8
			53.34[2.100]	55.88[2.200]	44		7-534267-7
			50.80[2.000]	53.34[2.100]	42		7-534267-6
			45.72[1.800]	48.26[1.900]	38		7-534267-5
			40.64[1.600]	43.18[1.700]	34		7-534267-4
			38.10[1.500]	40.64[1.600]	32		7-534267-3
			33.02[1.300]	35.56[1.400]	28		7-534267-2
			25.40[1.000]	27.94[1.100]	22		7-534267-1
			12.70[.500]	15.24[.600]	12		7-534267-0
			17.78[.700]	20.32[.800]	16		6-534267-9
			60.96[2.400]	63.50[2.500]	50		6-534267-8
			2.54[.100]	5.08[.200]	4		6-534267-7
			93.98[3.700]	96.52[3.800]	76		6-534267-6
			43.18[1.700]	45.72[1.800]	36		6-534267-5
			5.08[.200]	7.62[.300]	6		6-534267-4
	OBSELETE		-	2.54[.100]	2		 6-534267-3
			35.56[1.400]	38.10[1.500]	30		6-534267-2
			58.42[2.300]	60.96[2.400]	48		6-534267-1
			20.32[.800]	22.86[.900]	18		6-534267-0
			27.94[1.100]	30.48[1.200]	24		5-534267-9
			73.66[2.900]	76.20[3.000]	60		5-534267-8
			48.26[1.900]	50.80[2.000]	40		5-534267-7
			30.48[1.200]	33.02[1.300]	26		5-534267-6
			7.62[.300]	10.16[.400]	8		5-534267-5
			99.06[3.900]	101.60[4.000]	80		5-534267-4
			10.16[.400]	12.70[.500]	10		5-534267-3
			22.86[.900]	25.40[1.000]	20		5-534267-2
			15.24[.600]	17.78[.700]	14		5-534267-1
		FINISH	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 06NOV2002		 TE Connectivity					
		CHK J.OLSON 06NOV02							
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, DUAL ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU					
		APVD J.OLSON 06NOV02							
		PRODUCT SPEC 108-25022							
		APPLICATION SPEC 114-25018							
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± ±		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL		FINISH		WEIGHT		A2 00779 C=534267		-	
				CUSTOMER DRAWING		SCALE 1:1		SHEET 2 of 2	REV AB5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-534267-8](#)