


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DF	D0		G	UPDATE PER 0H2Y-0164-04	05-12-04	JDM	MKS

D

C

B

A

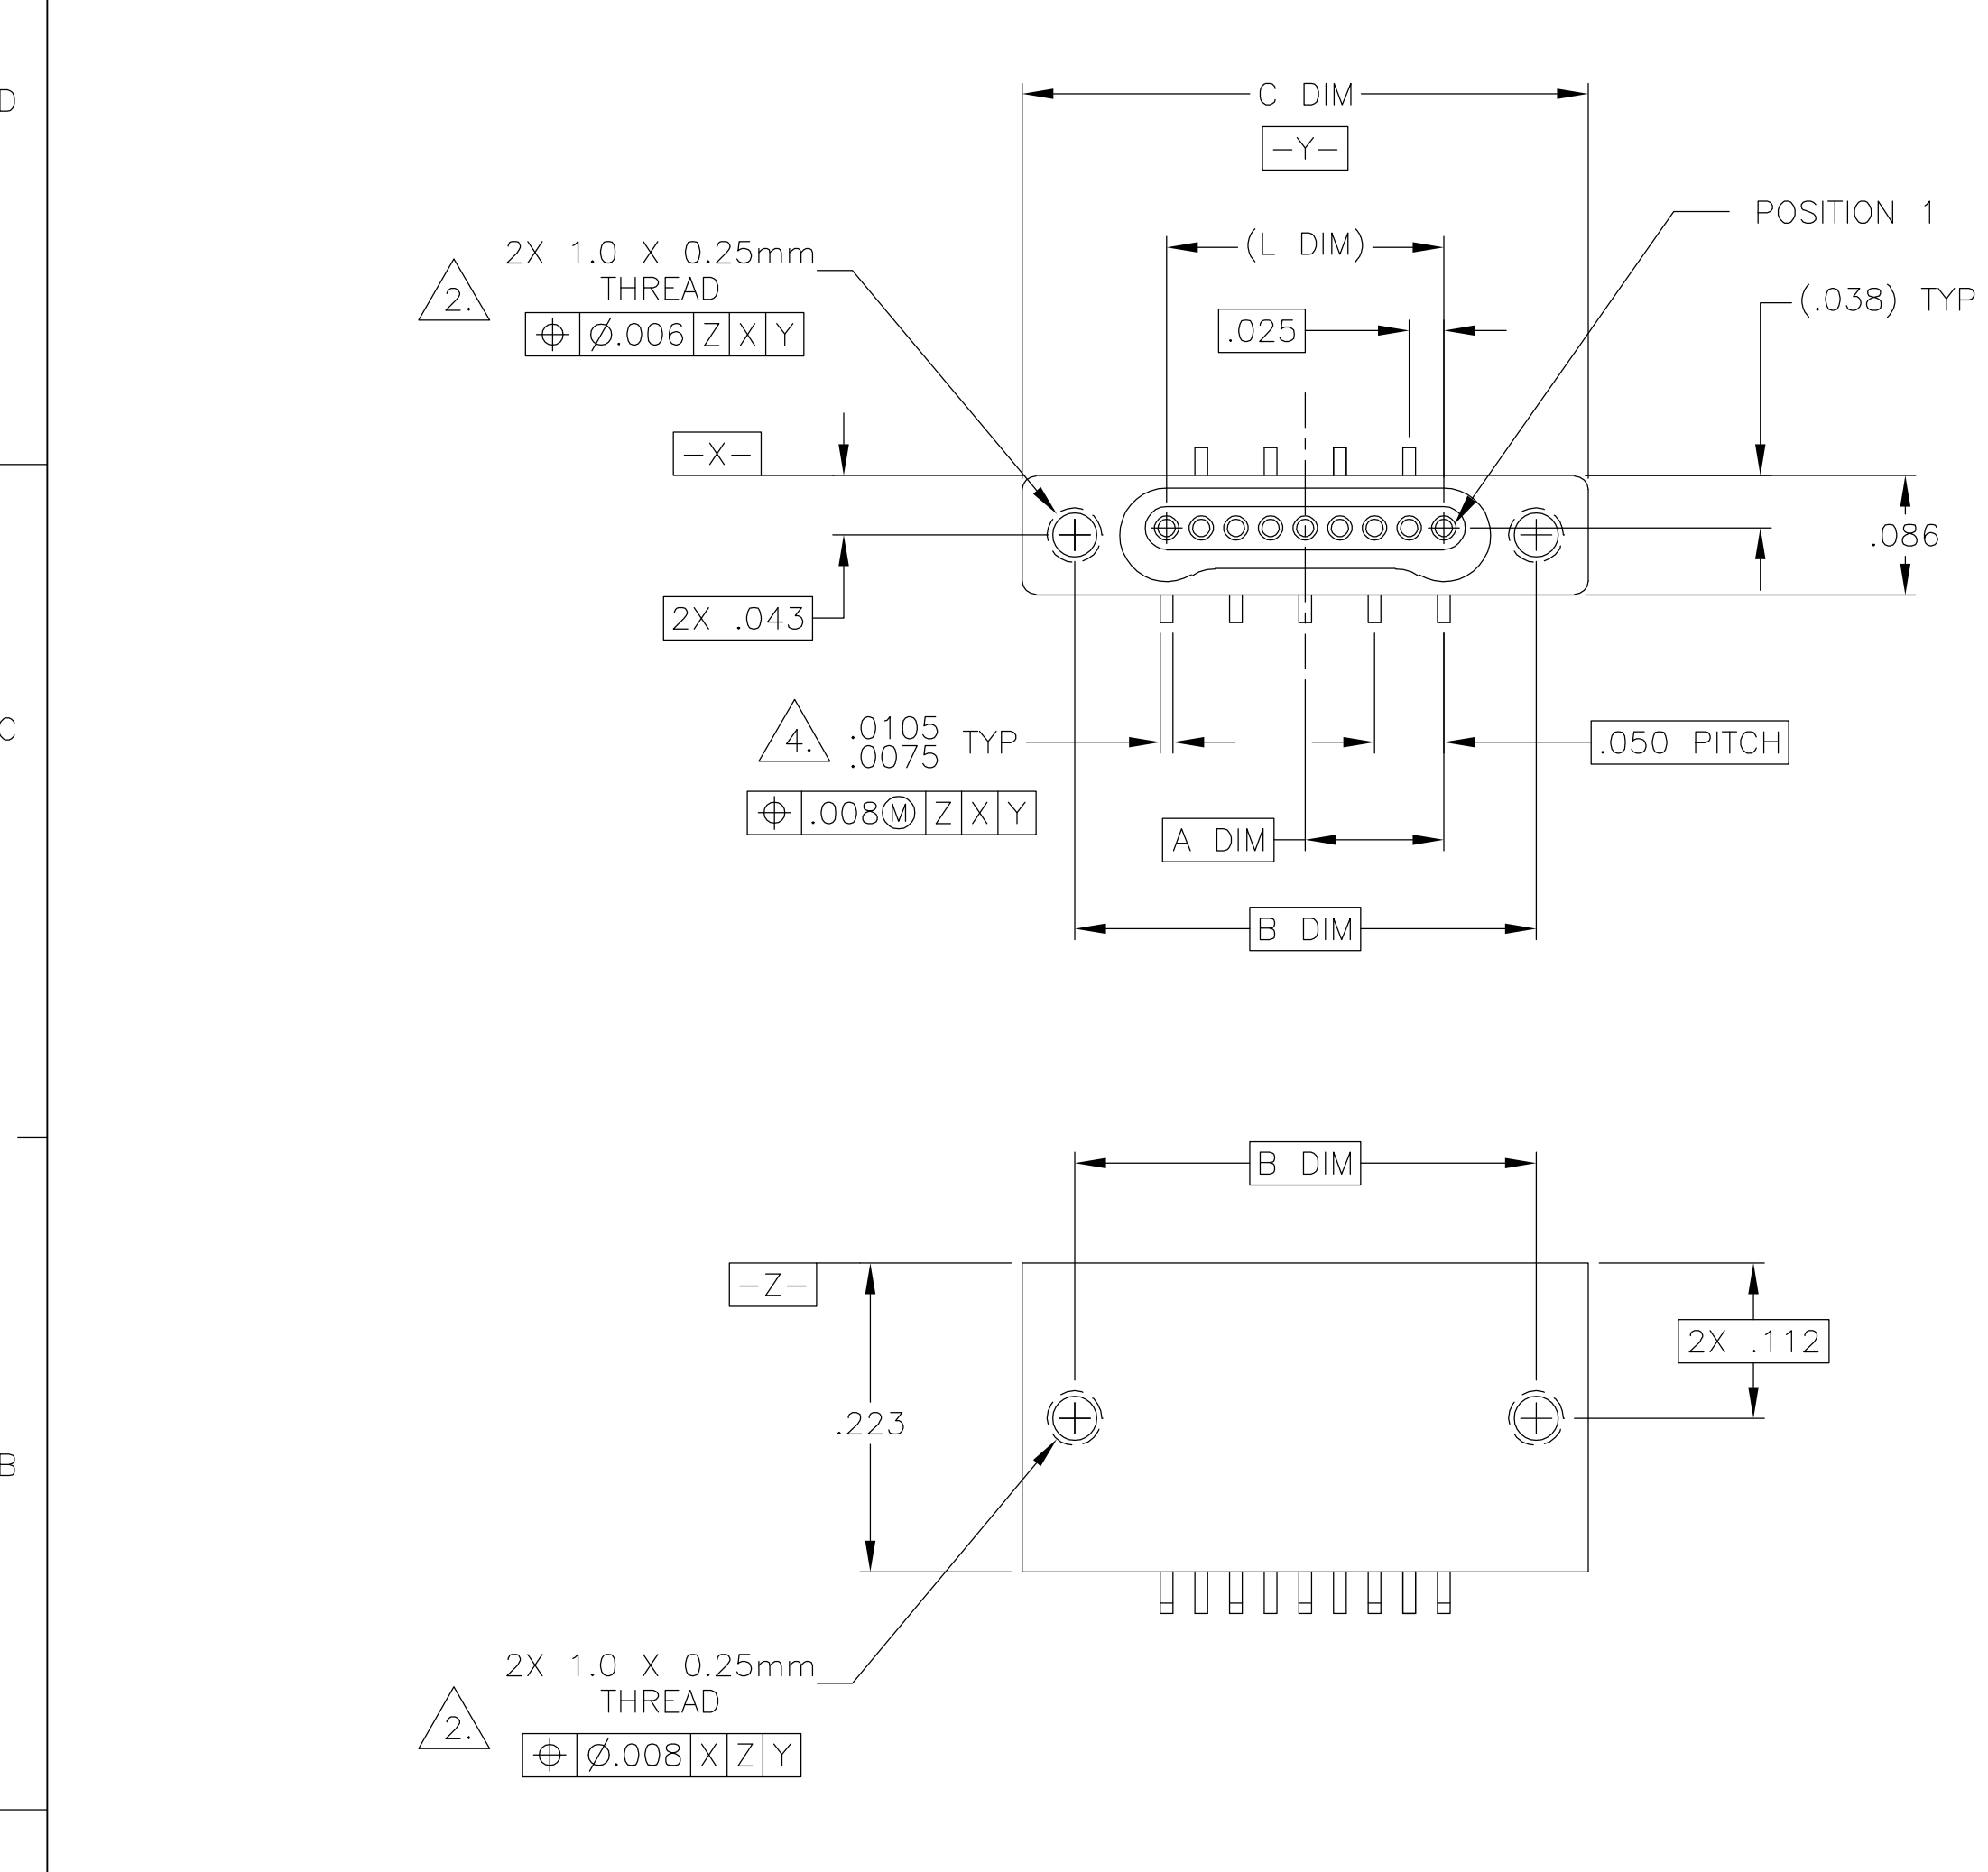


SIZE	A DIM	B DIM	C DIM ±.0050	(L DIM)
05	.050	.233	.3085	(.100)
09	.100	.333	.4085	(.200)
15	.175	.483	.5585	(.350)
25	.300	.733	.8085	(.600)
37	.450	1.033	1.1085	(.900)
51	.625	1.383	1.4585	(1.250)

D


C

B

A

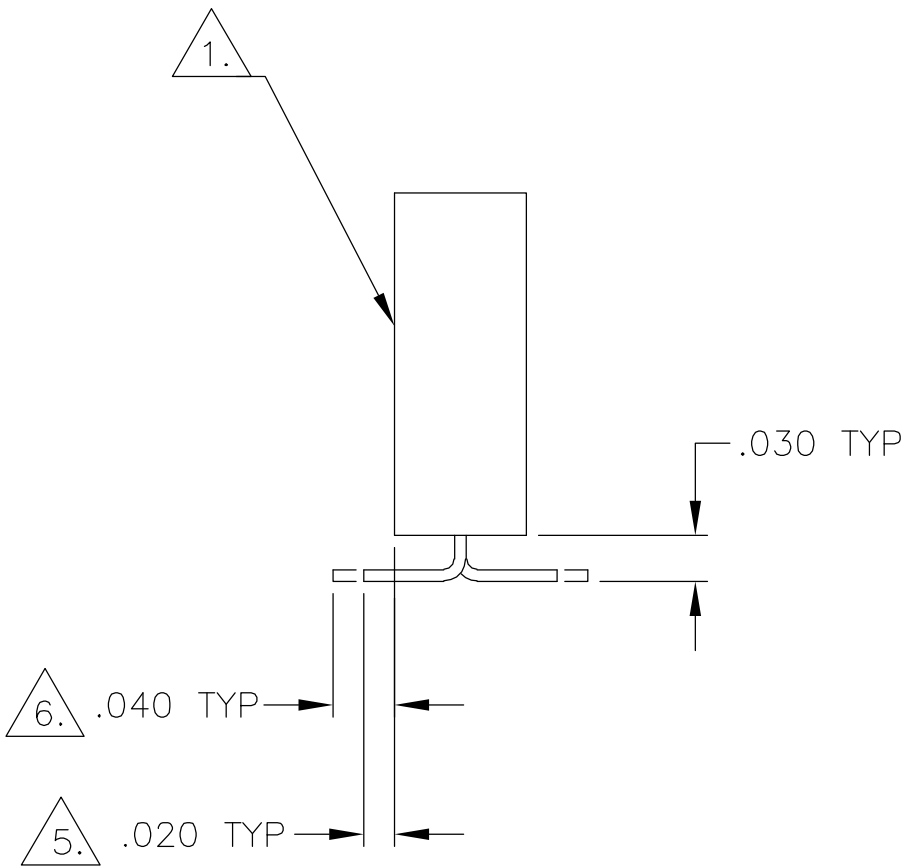

1. SHELL OPTIONS (TO BE SPECIFIED IN NANONICS PART NUMBER):
METAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER MIL-C-26074 (STANDARD) OR GOLD PLATED PER MIL-G-45204
303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35
INSULATOR MATERIAL FOR ALL METAL SHELLS IS LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138
PLASTIC: LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138
2. STANDARD 1.0 X 0.25mm JACKSCREW AND MOUNTING THREADS ARE SHOWN FOR REFERENCE ONLY AND MUST BE SPECIFIED IN THE NANONICS PART NUMBER WHEN REQUIRED. 1.2 X 0.25mm THREADS ALSO AVAILABLE.
3. MOUNTING HARDWARE IS AVAILABLE WITH THIS CONFIGURATION (NOT SHOWN). HARDWARE MUST BE SPECIFIED IN THE NANONICS PART NUMBER. CONSULT TYCO ELECTRONICS FOR DETAILS.
4. SMT LEADS ARE BeCu, TIN LEAD PLATED 60/40 COMPOSITION PER SAE-AMS-P-81728
5. NANONICS TERMINATION CODE: L43 6. NANONICS TERMINATION CODE: L45
7. THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/136


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RYAN 03-01-96	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105			
		CHK G. FRANKLIN 04-04-01				
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. STORRY 04-03-01	NAME RECEPTACLE ASSEMBLY, VERTICAL SURFACE MOUNT, ALTERNATING LEADS, SINGLE ROW DUALLOBE, PLASTIC OR METAL			
	0 PLC ± -	PRODUCT SPEC —				
	1 PLC ± -	APPLICATION SPEC —				
	2 PLC ± .010	WEIGHT —				
	3 PLC ± .005					
4 PLC ± -	SIZE A2	CAGE CODE 00779	DRAWING NO C=1589464	RESTRICTED TO —		
MATERIAL SEE NOTES	FINISH SEE NOTES	CUSTOMER DRAWING		SCALE 8:1	SHEET 1 OF 2	REV G

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
		P	LTR	DATE	DWN APVD
DF	D0		G	UPDATE PER 0H2Y-0164-04	05-12-04JDM

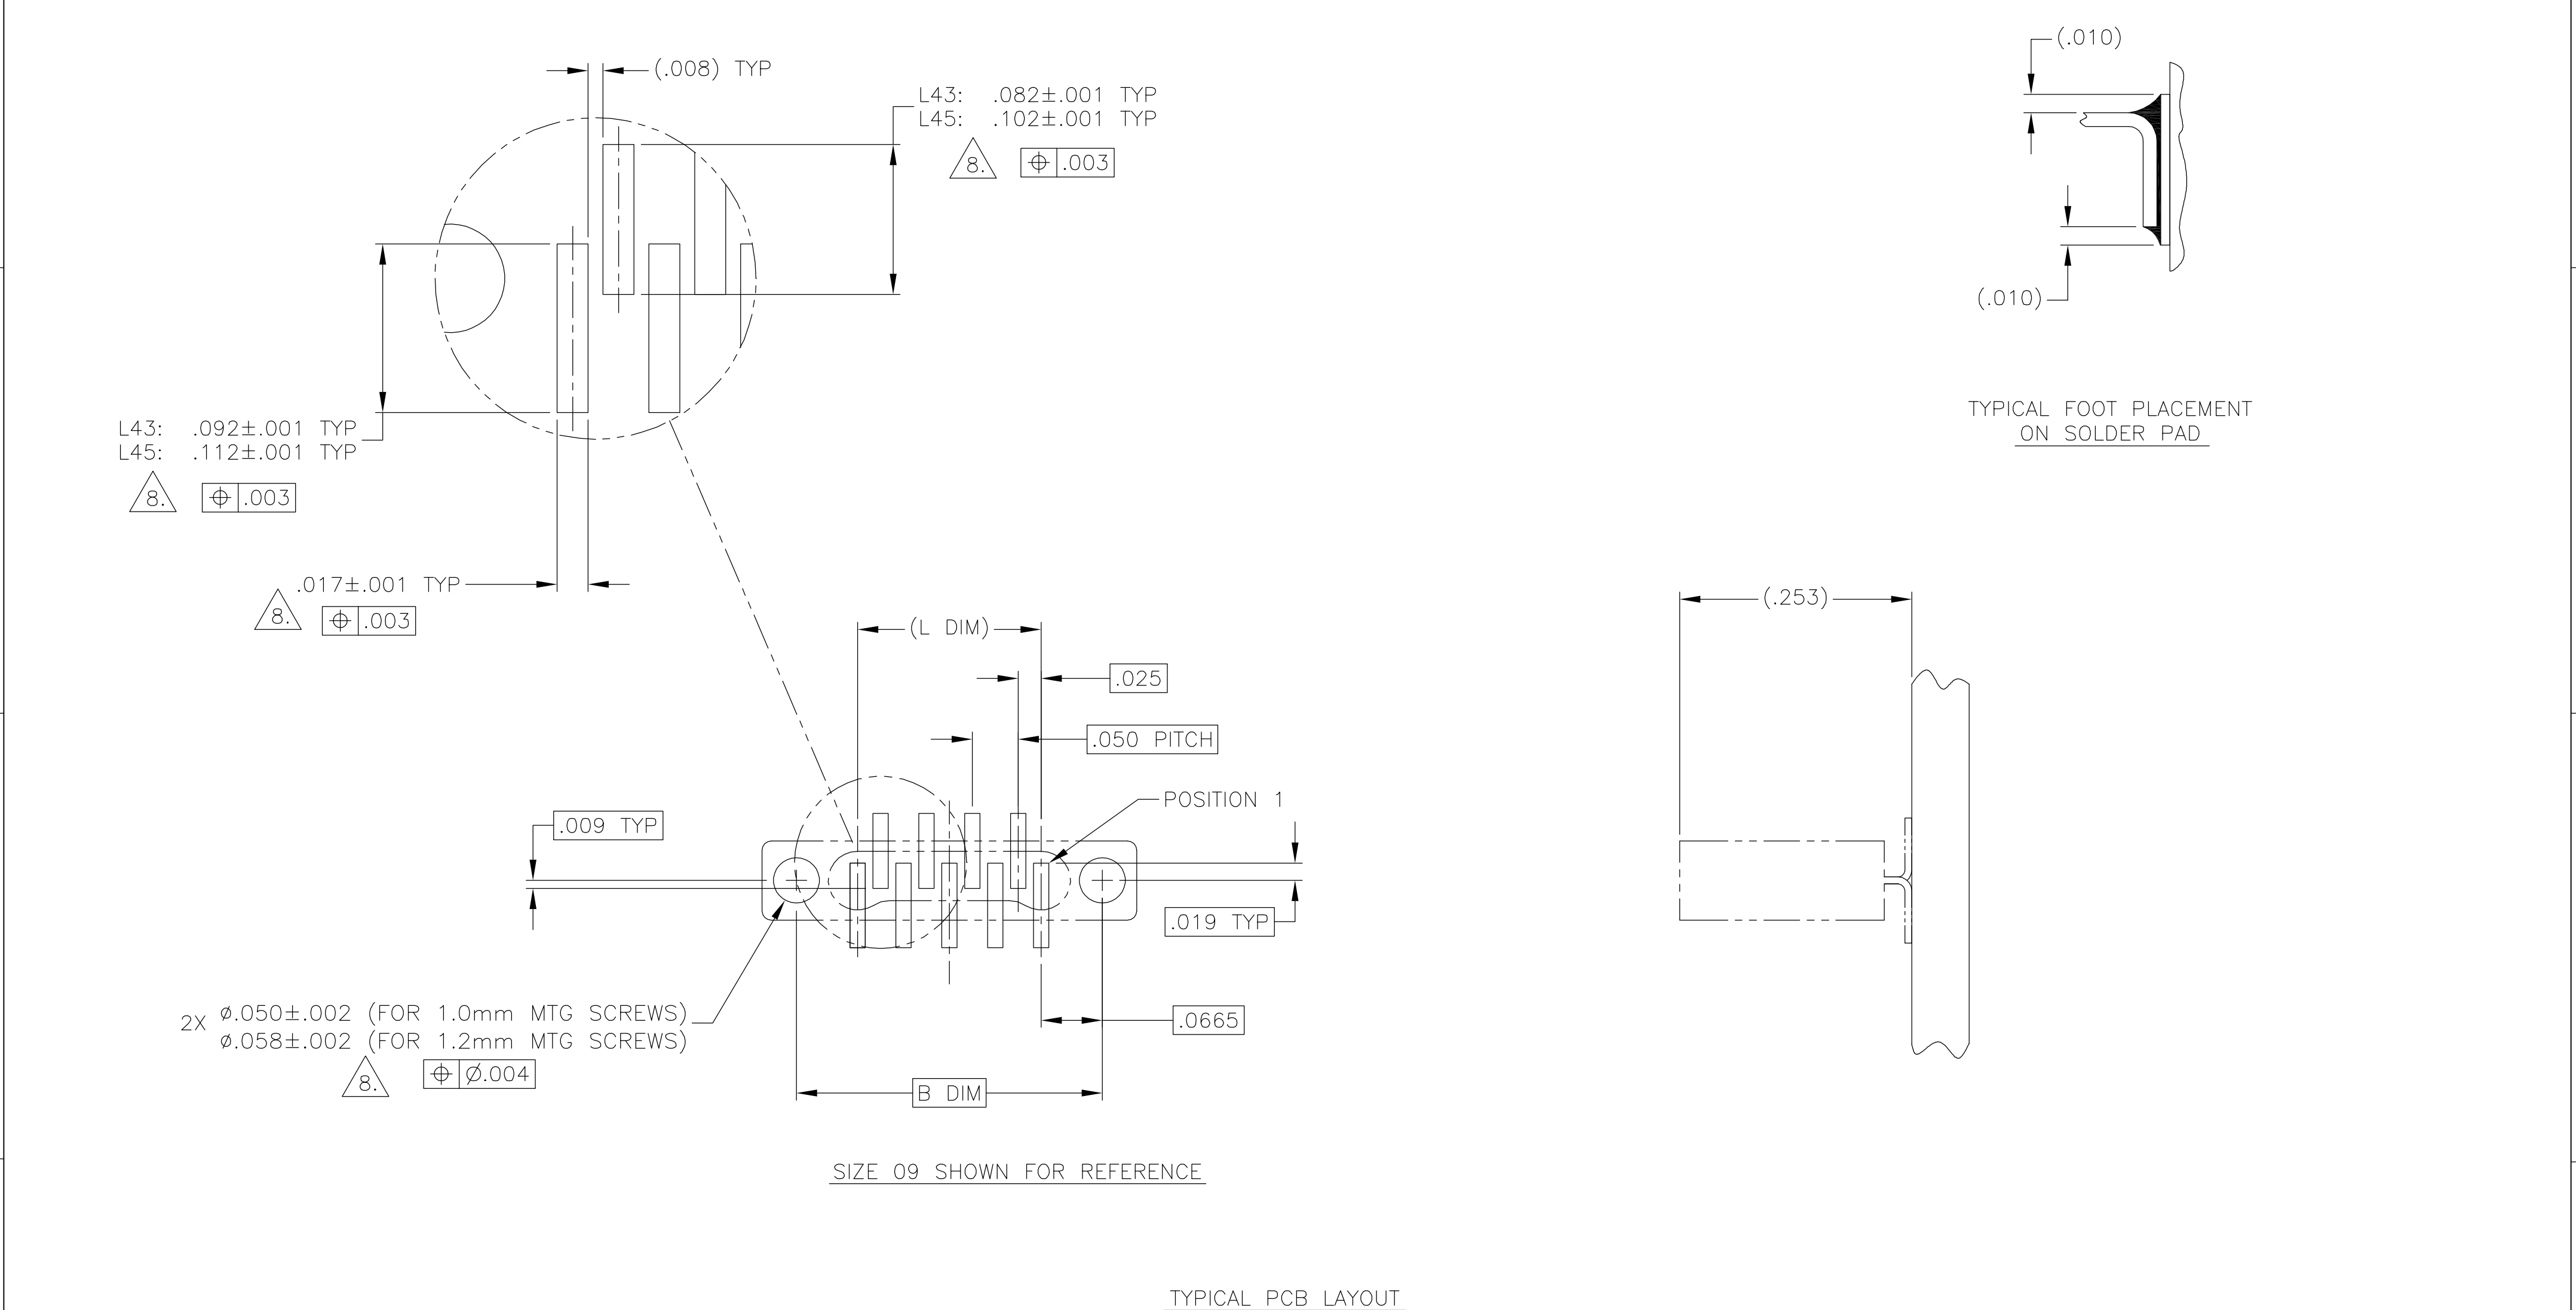

8. POSITIONAL TOLERANCES FOR BASIC DIMENSIONED FEATURES ARE RELATIVE TO FIDUCIALS OR SOME SIMILAR DATUM REFERENCE DEFINED BY THE PCB DESIGNER.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RYAN 03-01-96	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105				
		CHK G. FRANKLIN 03-01-96					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. STORRY 04-03-01	NAME				
	0 PLC ± -	PRODUCT SPEC	RECEPTACLE ASSEMBLY, VERTICAL SURFACE MOUNT, ALTERNATING LEADS, SINGLE ROW DUALLOBE, PLASTIC OR METAL				
	1 PLC ± -	—					
	2 PLC ± .010						
	3 PLC ± .005	APPLICATION SPEC					
	4 PLC ± -	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL	FINISH	WEIGHT —	A2	00779	C=1589464	—	
—	—	CUSTOMER DRAWING			SCALE 8:1	SHEET 2 OF 2	REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[SSL037L43KN](#)