

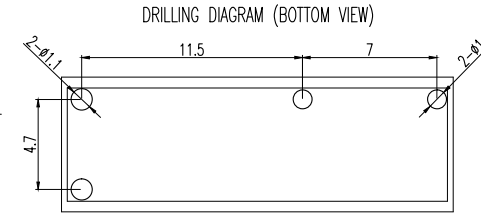
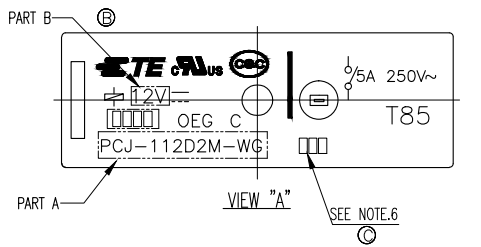
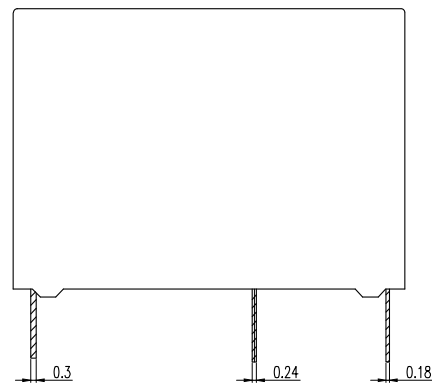


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 (C) COPYRIGHT - By TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
C1		CHANGE THE WIDTH OF THE TERMINAL FROM 0.6MM TO 0.8MM		ECD-14-011875	08-AUG-14	Q.L	B.F

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

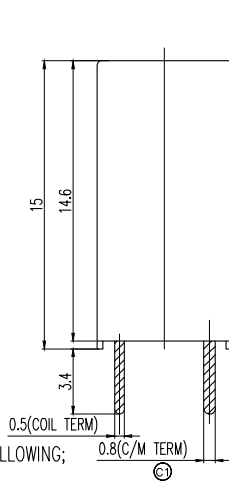

(C) NOTE:

1. LOT NO. SYSTEM AS FOLLOWING;



- (B) 2. ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A, B...
- (B) 3. TERMINAL DIMENSION IS BEFORE SOLDER DIP.
- (B) 4. FOR THE TIN-PLATING OF THE PINS:
 +0.1mm FOR WIDTH, THICKNESS AND DIAMETER.
 +0.5mm FOR LENGTH.
- (B) 5. MARKING FROM INK CHANGE TO LASER
- (C) 6. ADD LOT NO. SYSTEM AS FOLLOWING;



- I. DIGITS FOR DAY OF THE WEEK
 1...MONDAY IN THIS WEEK;
 2...TUESDAY IN THIS WEEK;

 7...SUNDAY IN THIS WEEK
- II. DIGITS FOR SHIFT OF THE DAY
 1...DAY SHIFT IN THIS DAY;
 2...NIGHT SHIFT IN THIS DAY;
- III. ONE CHARACTER DISTINGUISH THE LINE IDENTITY,
 SUCH AS: A,B,.....Z

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
R/C	±
ANGLES	±
MATERIAL	FINISH
-	-

DWN	ZHENXING.FU
CHK	N.FUNAYAMA
APVD	HSU,CHIEN-HUI
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

		NAME	
PCJ-WG SPEC ,000		RESTRICTED TO	
SIZE	CAGE CODE	DRAWING NO	
A3	00779	C=1721348	
SCALE		SHEET	REV
5:1		1 OF 2	C1

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- . - .

© COPYRIGHT - By TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HB

DIST

-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

N	PCJ-12402MH-WG, 000	1-1721348-4	SEAL UP INSPECTION ON EVERY PRODUCT	24V	PCJ-12402MH-WG
M	PCJ-11802MH-WG, 000	1-1721348-3	SEAL UP INSPECTION ON EVERY PRODUCT	18V	PCJ-11802MH-WG
I	PCJ-11202MH-WG, 000	1-1721348-2	SEAL UP INSPECTION ON EVERY PRODUCT	12V	PCJ-11202MH-WG
k	PCJ-10902MH-WG, 000	1-1721348-1	SEAL UP INSPECTION ON EVERY PRODUCT	9V	PCJ-10902MH-WG
j	PCJ-10602MH-WG, 000	1-1721348-0	SEAL UP INSPECTION ON EVERY PRODUCT	6V	PCJ-10602MH-WG
i	PCJ-10502MH-WG, 000	1721348-9	SEAL UP INSPECTION ON EVERY PRODUCT	5V	PCJ-10502MH-WG
h	PCJ-10302MH-WG, 000	1721348-8	SEAL UP INSPECTION ON EVERY PRODUCT	3V	PCJ-10302MH-WG
g	PCJ-12402M-WG, 000	1721348-7		24V	PCJ-12402M-WG
f	PCJ-11802M-WG, 000	1721348-6		18V	PCJ-11802M-WG
e	PCJ-11202M-WG, 000	1721348-5		12V	PCJ-11202M-WG
d	PCJ-10902M-WG, 000	1721348-4		9V	PCJ-10902M-WG
c	PCJ-10602M-WG, 000	1721348-3		6V	PCJ-10602M-WG
b	PCJ-10502M-WG, 000	1721348-2		5V	PCJ-10502M-WG
a	PCJ-10302M-WG, 000	1721348-1		3V	PCJ-10302M-WG
No.	EC TYPE NAME	TE PART NO	DESCRIPTION	PART B	PART A

RELAY TYPE

		Sn-Ag-Cu	SOLDER	18
94V-0		PBT	CASE	17
		UV	SEAL(CASE) JUST FOR WASH TIGHT	16
		EPOXY	SEAL(CASE AND BASE)	15
		3UEW	MAGNETIC WIRE	14
94V-0		PBT	CARD	13
		Ag ALLOY	STATIONARY CONTACT	12
	SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL	11
		Ag ALLOY	MOVABLE CONTACT	10
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	9
94V-0		PBT	BASE	8
		STAINLESS	HINGE SPRING	7
	NIP	STEEL	ARMATURE	6
	NIP	STEEL	CORE	5
	NIP	STEEL	YOKE	4
	SOLDER DIP	Cu ALLOY	COIL TERMINAL B	3
	SOLDER DIP	Cu ALLOY	COIL TERMINAL A	2
94V-0		PBT	BOBBIN	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN ZHENXING.FU

CHK

N.FUNAYAMA

APVD HSU,CHIEN-HUI

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 RUC ±

ANGLES ±

FINISH

-

MATERIAL

-



TE Connectivity

NAME

PCJ-WG SPEC ,000

SIZE

A300779

CAGE CODE

DRAWING NO

C=1721348

RESTRICTED TO

-

SCALE 5:1

SHEET 2 OF 2

REV C1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1721348-5](#)