

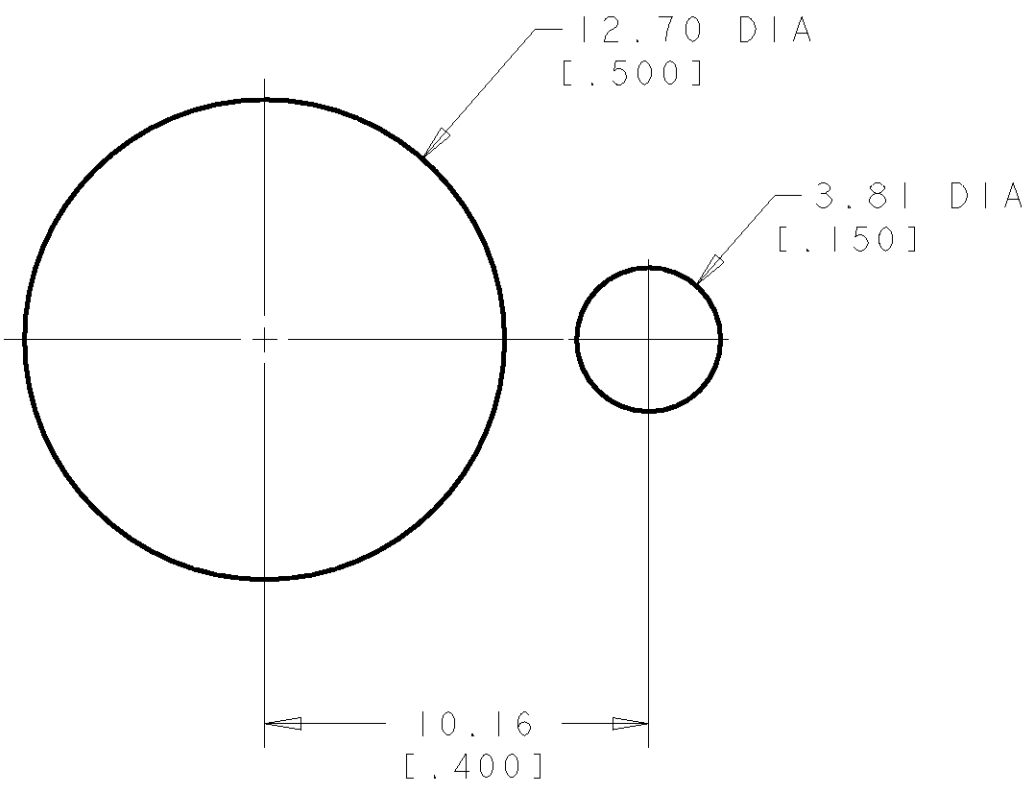
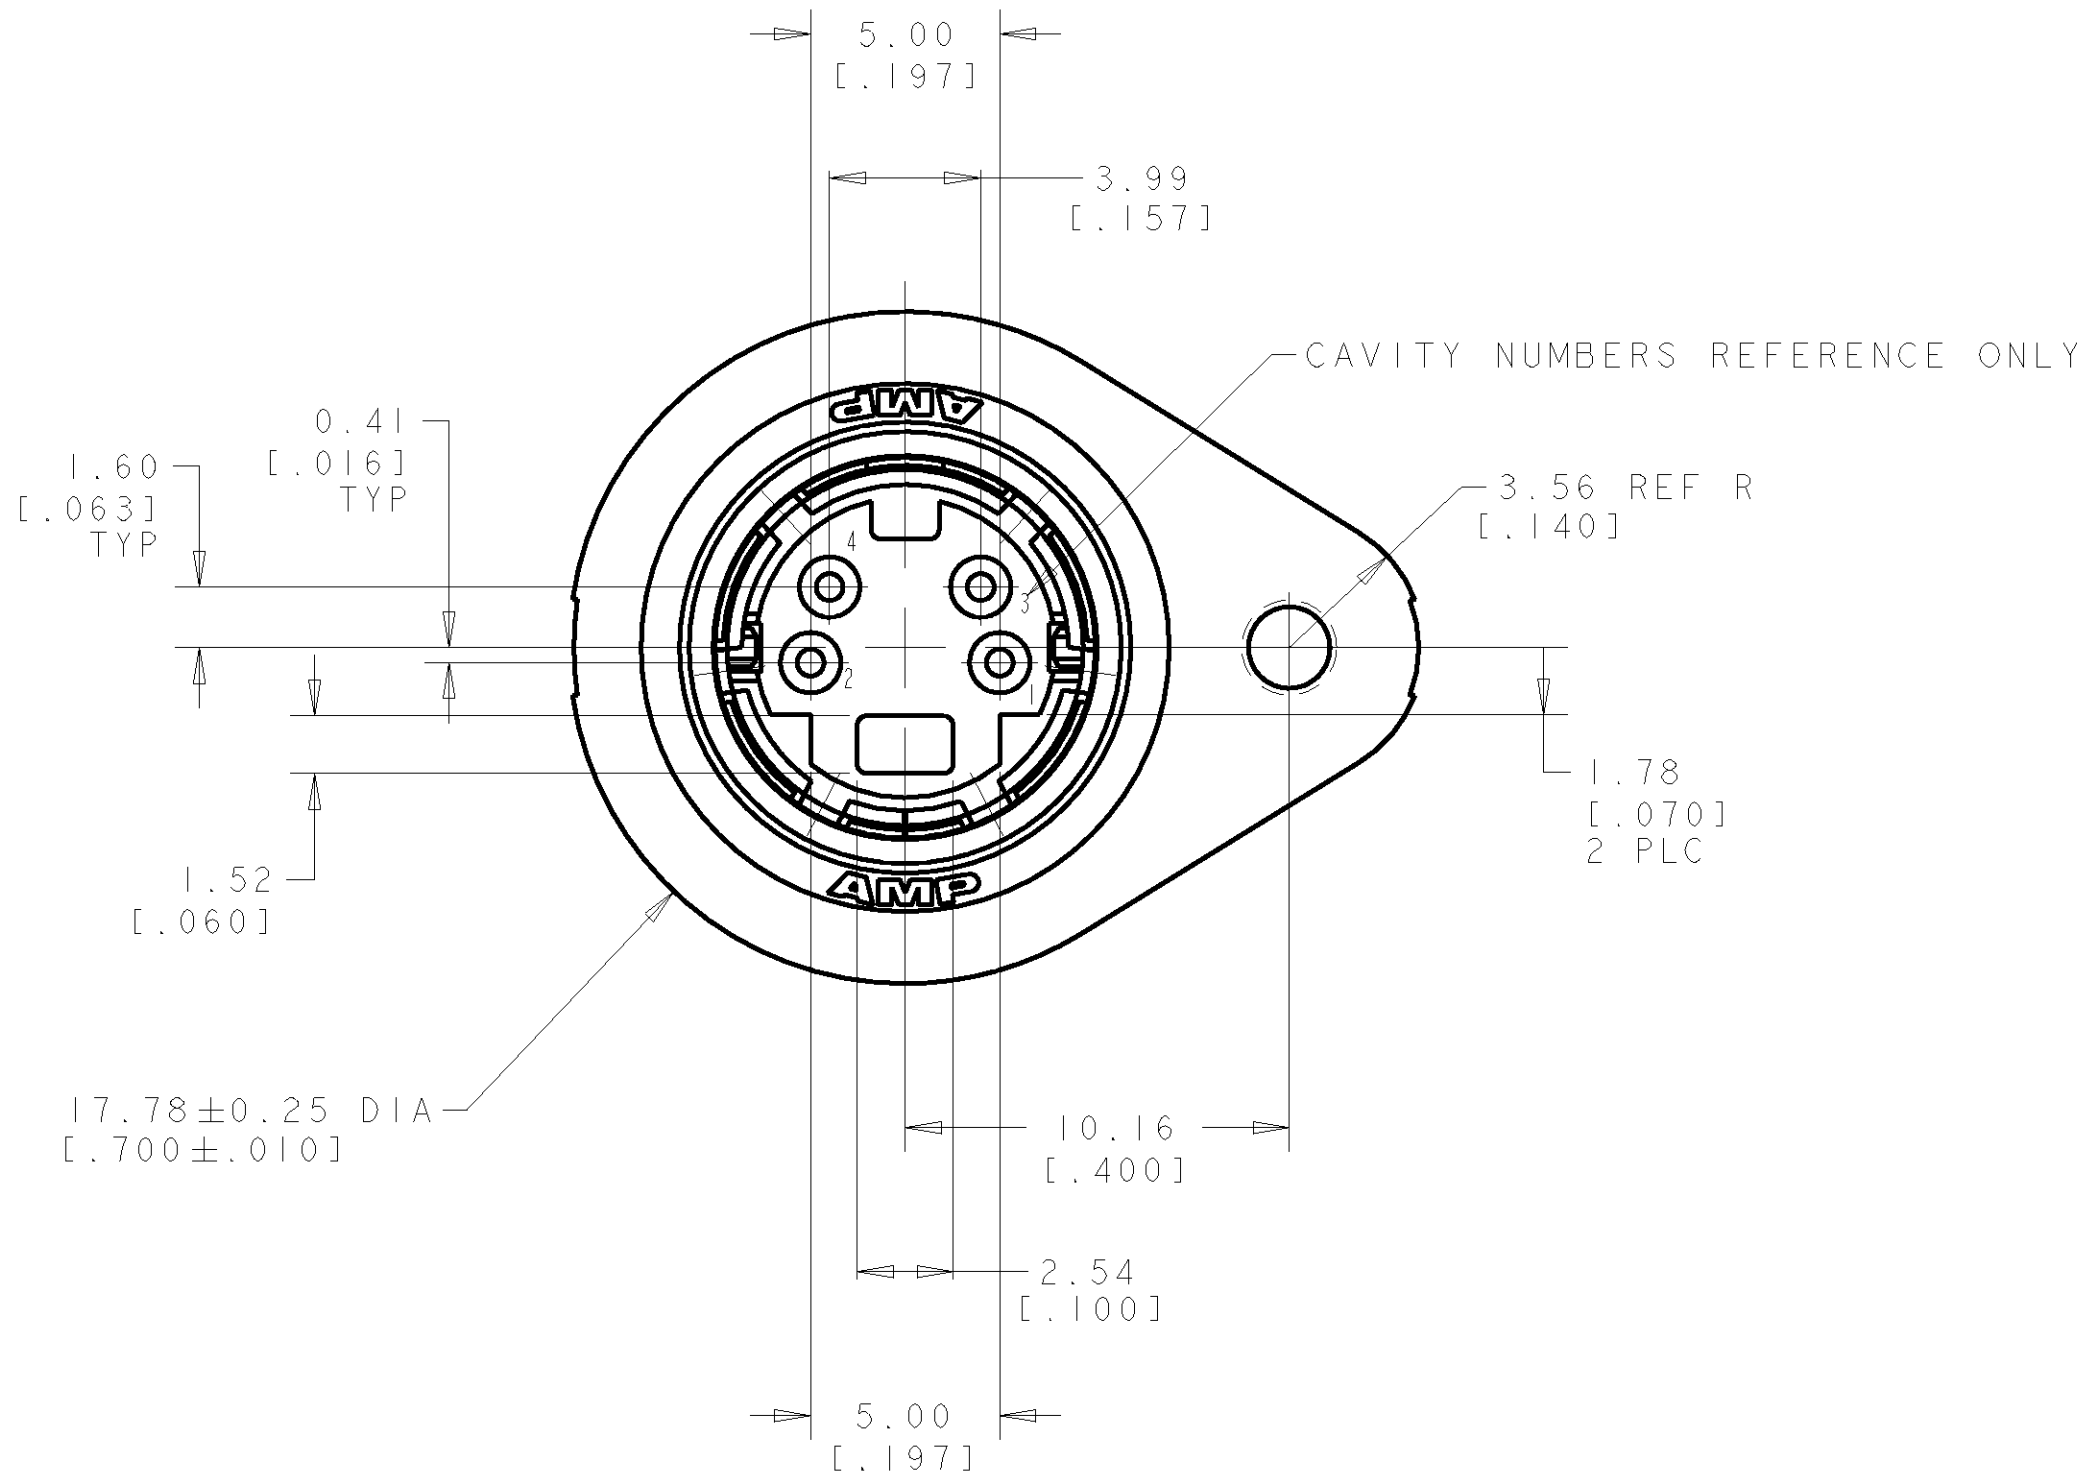



LOC	DIST	REVISIONS					
DY	-	F	LTR	DESCRIPTION	DATE	DWN	APVD
			0	NPR FP00-0216-04	30AUG2004	LWY	LSF
	</						

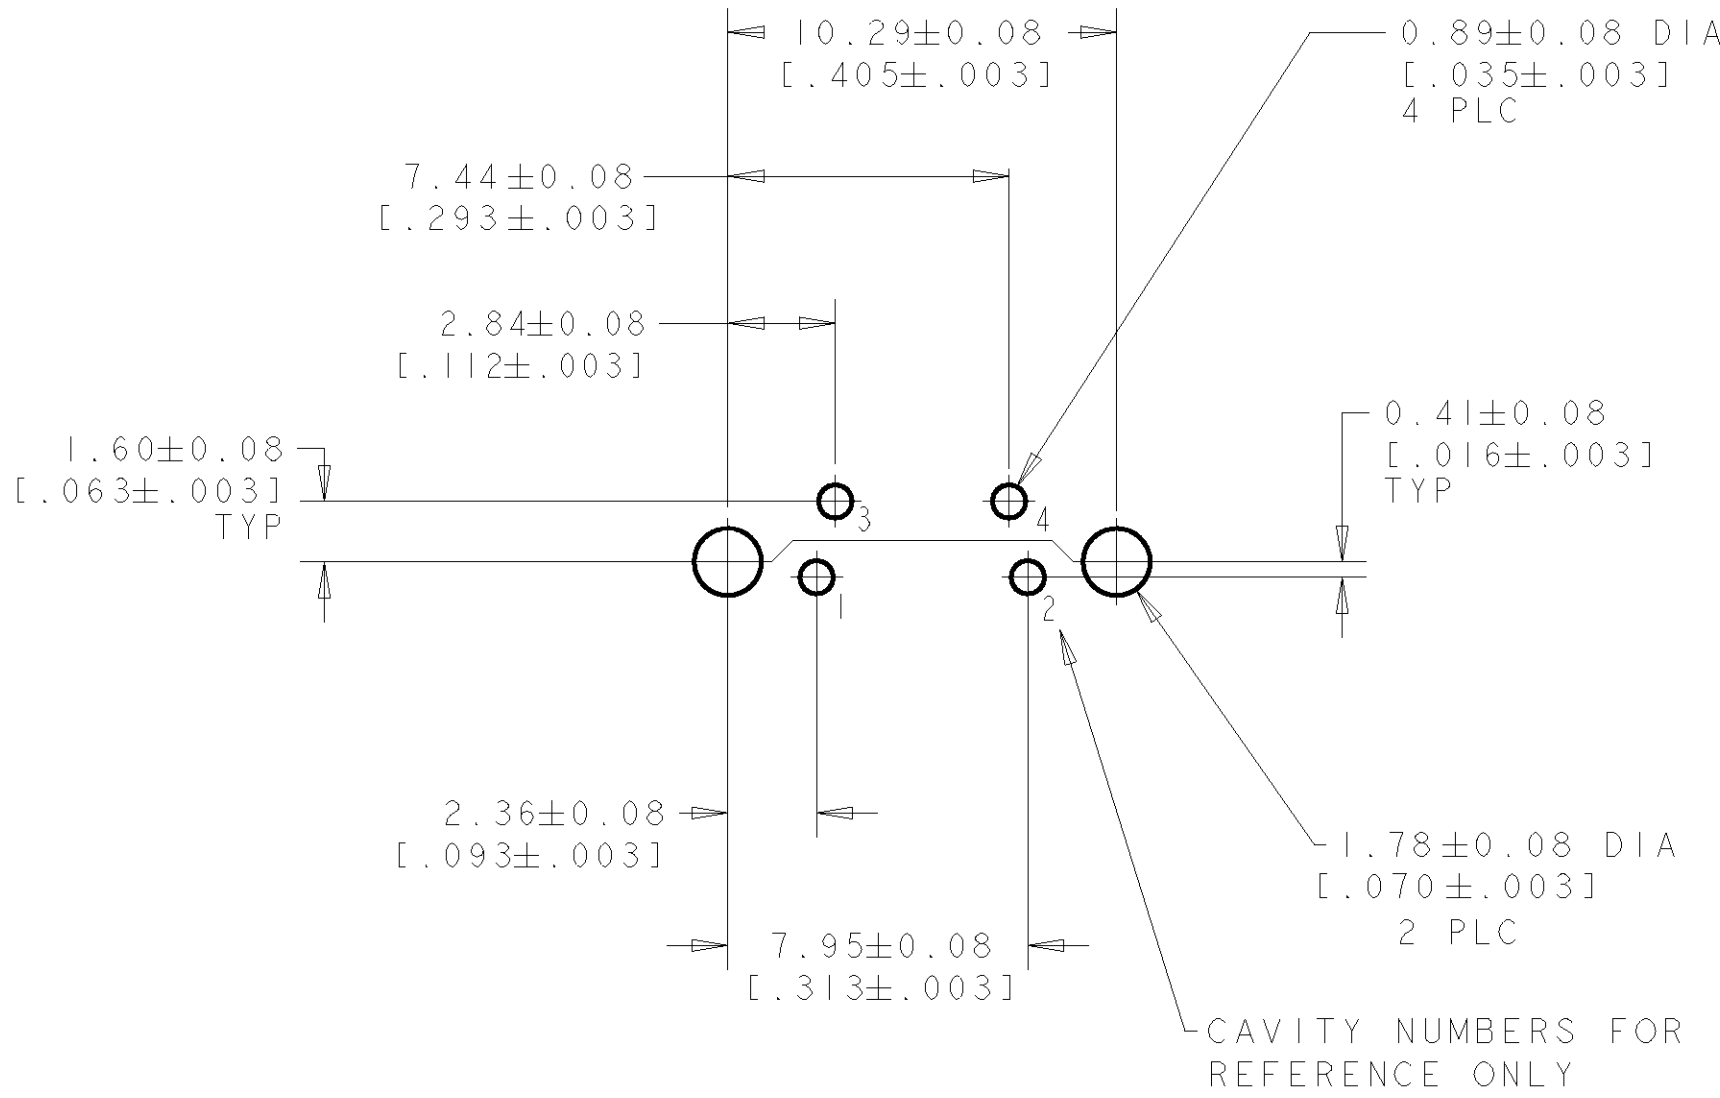

RECOMMENDED PANEL CUT-OUT

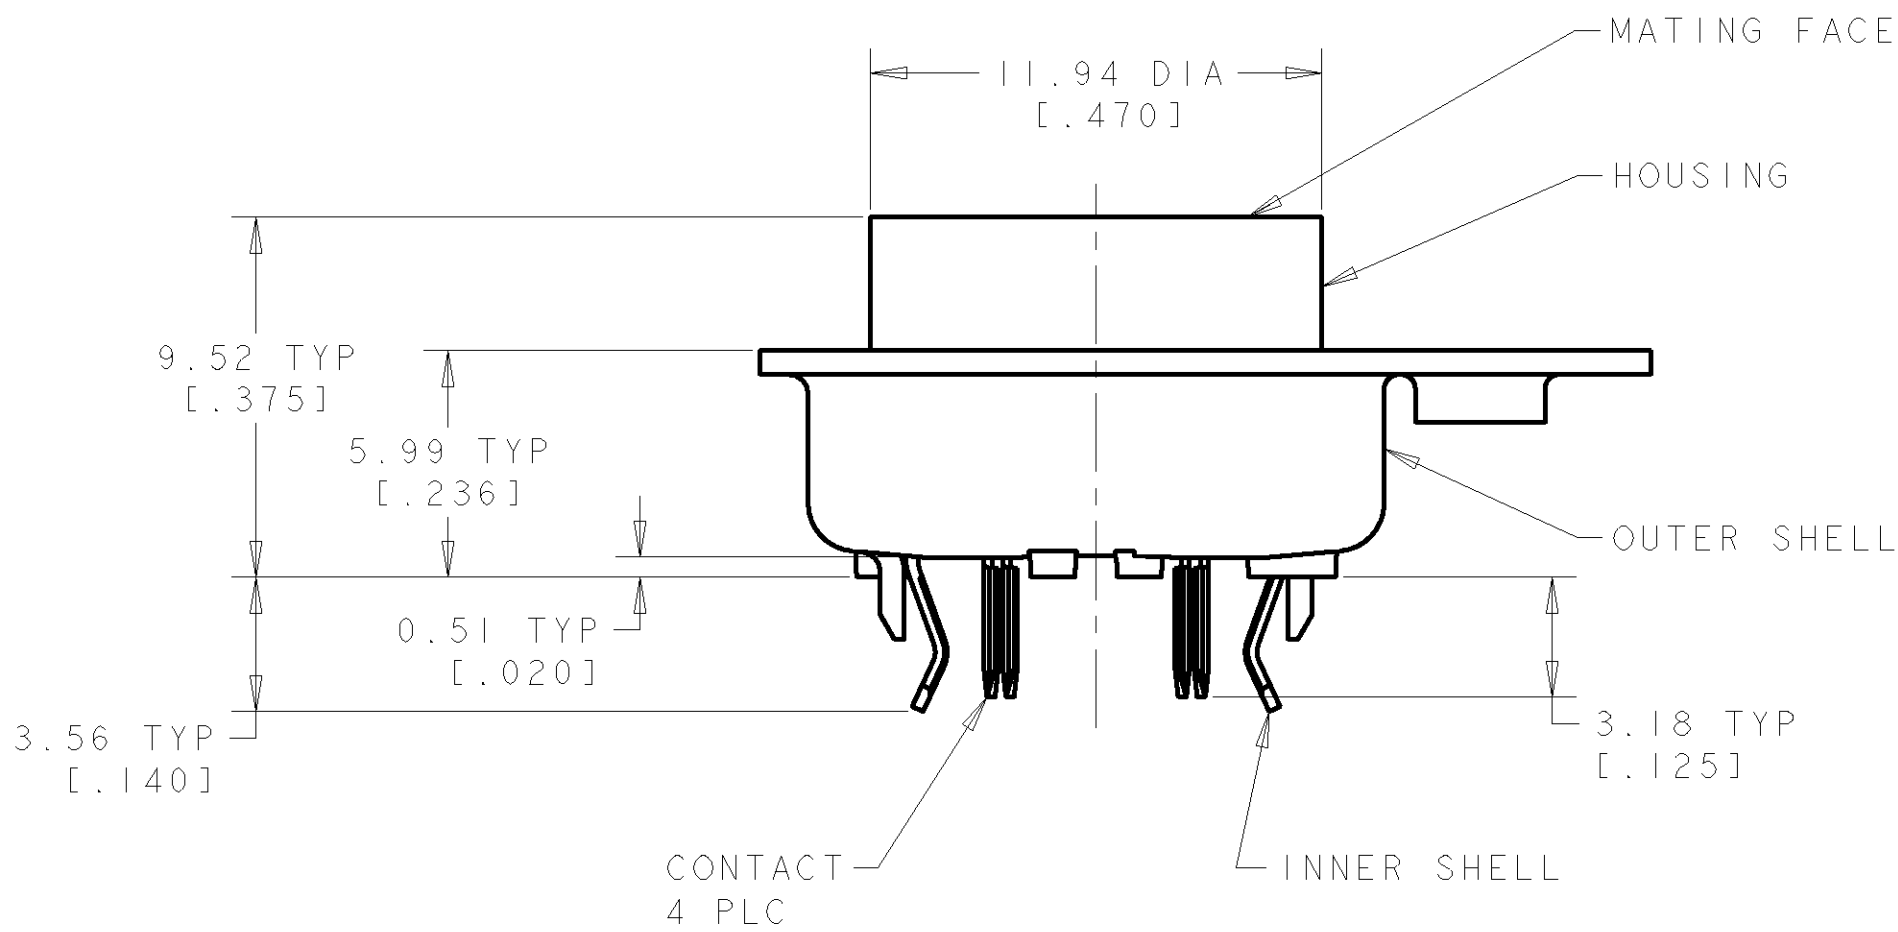

RECOMMENDED PC BOARD LAYOUT
BOTTOM VIEW

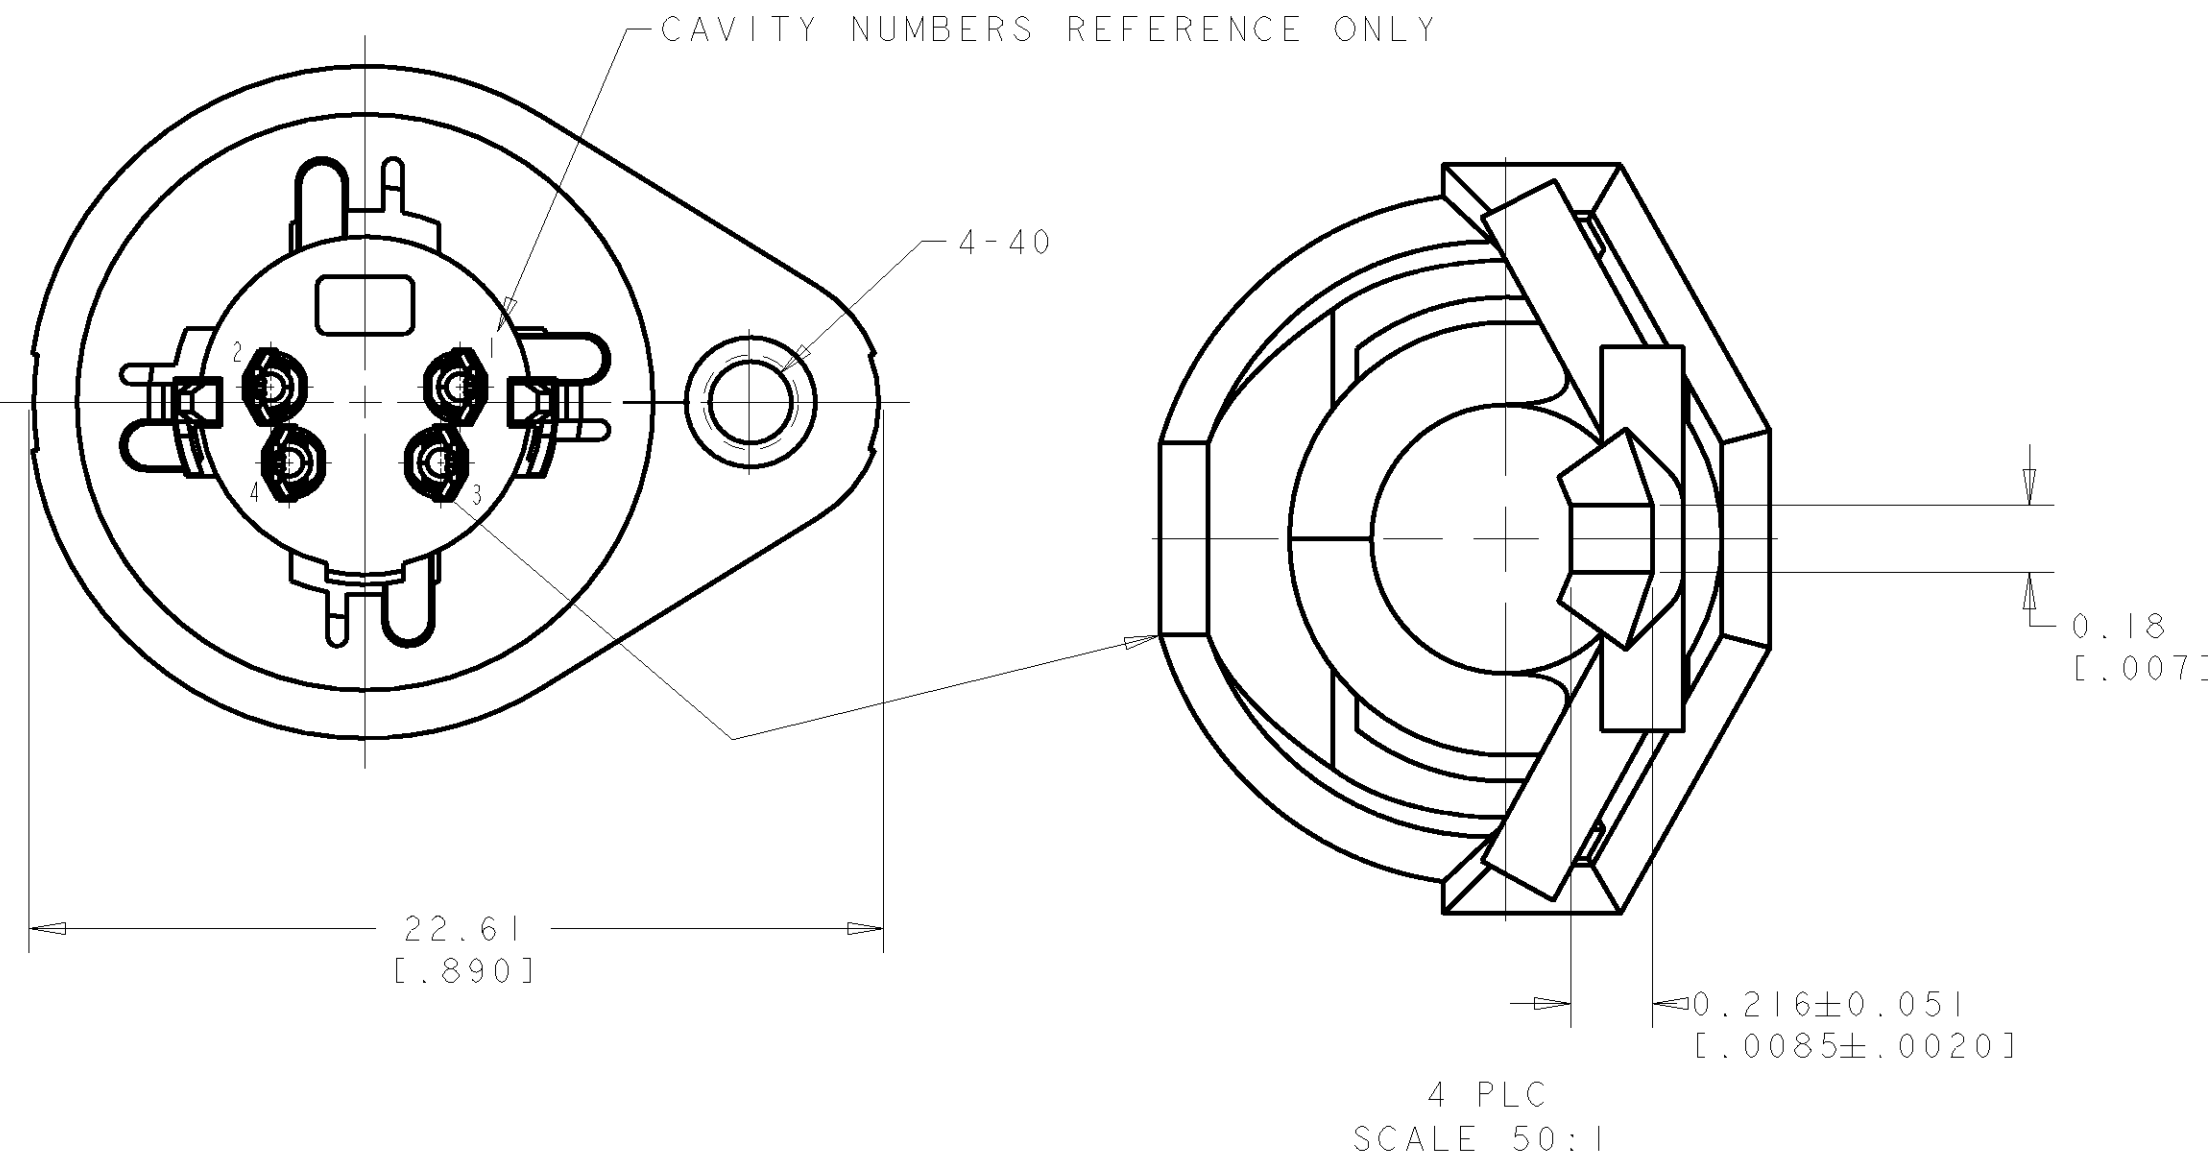

1. SHELLS: BRASS; CONTACTS: PHOSPHOR BRONZE; HOUSING: POLYESTER, UL 94V-O RATED, BLACK.
2. 0.76 μm [.000030] MIN GOLD ON MATING END FOR A LENGTH OF 1.37 [.054] MIN ON INSIDE, 2.54 μm [.000100] MIN TIN FOR A LENGTH OF 3.30 [.130] MIN FROM OPPOSITE END, ALL OVER 1.27 μm [.000050] MIN NICKEL.
3. 0.38 μm [.000015] MIN GOLD ON MATING END FOR A LENGTH OF 1.37 [.054] MIN ON INSIDE, 2.54 μm [.000100] MIN TIN FOR A LENGTH OF 3.30 [.130] MIN FROM OPPOSITE END, ALL OVER 1.27 μm [.000050] MIN NICKEL.
4. RECEPTACLE ASSEMBLY MATES WITH 4 PIN, 8.99±0.10 [.354±.004] DIAMETER PLUG.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN WYLEE	30AUG2004	Tyco Electronics Singapore Pte. Ltd.	
DIMENSIONS: mm[INCHES]		CHK SF LEONG	APVD SF LEONG	NAME RECEPTACLE ASSEMBLY, 4 POSN, LOW FLANGE, SHIELDED, VERTICAL, MINIATURE CIRCULAR DIN	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13(.005) 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC APPLICATION SPEC		SIZE A1	
MATERIAL FINISH		WEIGHT CAGE CODE		DRAWING NO 00779	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1	
				REV 0	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5750319-2](#)