


## 175-200W, 3" x 5" Power Supplies

### Features

- ◆ 1-5 Outputs
- ◆ Up to 90% Efficient
- ◆ Active Power Factor Correction
- ◆ Universal Input (90 - 264VAC)
- ◆ No Minimum Loads
- ◆ Medical Approvals (Basic Insulation Input-Output)



### Key Market Segments & Applications



<b>Specifications</b>		<b>Model</b>	<b>NV175</b>
Input Voltage range	-		90 - 264VAC (47 - 63Hz, 440Hz with reduced PFC)
Inrush Current	A		<40A at 25C and 230VAC input, Cold Start
Power Factor Harmonics	-		EN61000-3-2 Compliant (0.97 typical)
Regulation Total	-		1%; Including Line (for 90-264VAC input change), Load (for 0-100% load change) and Cross (for 0-100% load change on any other output) regulation
Ripple & Noise	mV		1% or 50mV (Which ever is greater)
Efficiency	-		Up to 90%, configuration dependant
Minimum Load	A		None
Overcurrent Protection	-		>105%
Overvoltage Protection	V		CH1 & CH2, 120-130%, Cycle AC line to reset
Overtemperature Protection	-		Yes
Hold Up Time (Typ)	ms		>16ms at 90VAC Input
Leakage Current (max)	µA		123µA 120VAC 60Hz, 257µA 240VAC 60Hz, <300µA 264VAC 63Hz (Type Test results)
Remote Sense	-		On Outputs CH1 & CH2, 0.5V compensation maximum
DC Good	-		CH1 Only, High on Fail (90% of nominal ±5%)
Remote On/Off (Specify N option)	-		-N1 or -N2 option: TTL level high = Off, -N3 or -N4 option: open circuit = Off (except standby)
Operating Temperature (1)(7)	-		0 to +70°C. Derate linearly to 50% load from 50°C to 70°C
Storage Temperature	-		-40 to +85°C
Humidity (non condensing)	-		5 - 95% RH
Cooling	-		Forced air, 2m/s from input to output (Approx 10 CFM)
Isolation (4)	-		Input to Ground 2.3kVDC, Input to Output 4.3kVDC, Output to Ground 200VDC
Vibration (non operating)	-		Conforms to MIL-STD-810E, Method 514.4, Pro I, Cat 1,9; EN60068-2-6, IEC68-2-6
Shock	-		Conforms to MIL-STD-810E/F, Method 516.5, Pro I, IV, VI; EN60068-2-27, EN60068-2-47, IEC68-2-47, IEC68-2-47, JIS C0041-1987
Safety Agency Approvals	-		UL/CSA/IEC/EN 60950-1, UL/CSA/IEC/EN 60601-1, ANSI/AAMI ES60601-1, IEC/EN 61010-1, CE Mark
Immunity	-		EN61000-6-2:2001, EN61000-4-2, -3, -4, -5, -6, -8, -11
Conducted Emissions and Flicker	-		EN55022 Class B (per CISPR.22), EN61000-3-3
Radiated Emissions (2)	-		EN55022 Class A (per CISPR.22)
Weight (Typ)	g		250g
Size (without cover) (3)	in		3" x 5" x 1.25"; N option version 3.7" x 5" x 1.25"
Warranty	yrs		Three Years

(1) -20°C cold start

(2) See application note for Class B

(3) Including underside component leads

(4) Input-Output: Reinforced IEC60950-1, Basic IEC 60601-1.

See NV175-M for reinforced medical insulation


## Stocked Models Quick Selector

Model	CH1 (5)	CH2 (5)	CH3	CH4	CH5 Stand By (6)	Global Option Type
NV1-1T000	12V/15A	-	-	-	-	-
NV1-1G000	24V/7.5A	-	-	-	-	-
NV1-453TT	+5V/25A	+3.3V/15A	+12V/5A	-12V/1A	-	-
NV1-453FF	+5V/25A	+3.3V/15A	+15V/5A	-15V/1A	-	-
NV1-4G5TT	+24V/7.5A	+5V/8A	+12V/5A	-12V/1A	-	-
NV1-4G5FF	+24V/7.5A	+5V/8A	+15V/5A	-15V/1A	-	-
NV1-453TT-N3	+5V/25A	+3.3V/15A	+12V/5A	-12V/1A	5V/2A	N3 (ATX)
NV1-453FF-N3	+5V/25A	+3.3V/15A	+15V/5A	-15V/1A	5V/2A	N3 (ATX)
NV1-4G5TT-N3	+24V/7.5A	+5V/8A	+12V/5A	-12V/1A	5V/2A	N3 (ATX)
NV1-4G5FF-N3	+24V/7.5A	+5V/8A	+15V/5A	-15V/1A	5V/2A	N3 (ATX)

**Notes:**

- (5) Maximum combined current from CH1 + CH2 = 25A  
5V CH1 models are limited to 175W max. All others 180W, 200Wpk 5 mins
- (6) CH5 is always on regardless of inhibit status. Peak rated at 2.5A, floating output
- (7) Convection cooled maximum ratings: CH1: 55W, CH2: 8.25W, CH3: 9W, CH4: 3W, 75.25W total. 0°C - 40°C temperature range
- (8) 12 - 12.5V if 24V CH3 is fitted.
- (9) 14.5 - 15.5V if 24V CH3 is fitted.
- (10) 24 - 24.5V if 5V CH2 is fitted.  
24 - 26V if 24V CH3 is fitted

## Outline Drawing

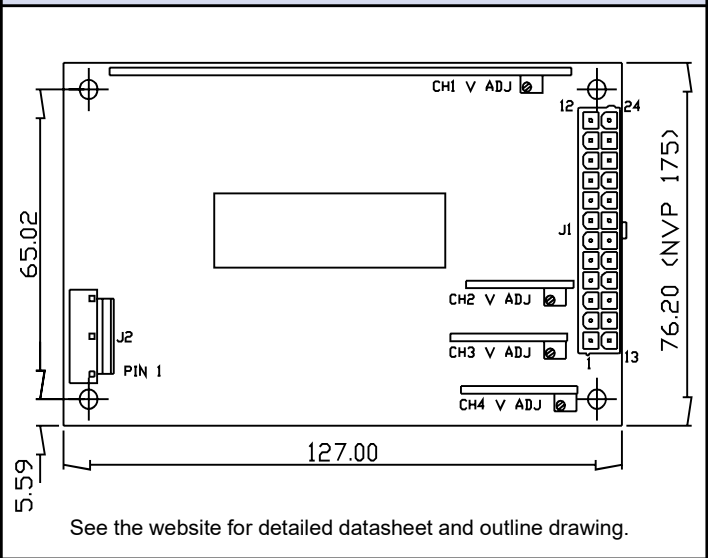

## Built to Order Model Selector

CH1	CH1(5) Code	Adjust. Range	CH2 CH2(5) Code	Adjust. Range	CH3 Code	Adjust. Range	CH4 Code	Adjust. Range
+5V / 25A	5	5 - 5.5V	+1.8V / 15A +2.7V / 15A +3.3V / 15A No output	1 2 3 0	0.9 - 3.3V 2.5 - 3.3V 2.5 - 3.3V -	+12V / 5A +15V / 5A +24V / 2.5A No output	T F G 0	12 - 15V 12 - 15V 18 - 24V -
+12V / 15A +15V / 12A	T F	12 - 15V (8) 12 - 15V (9)	+5V / 10A No output	5 0	3.3 - 5.5V -			
+24V / 7.5A	G	24 - 28V (10)	+5V / 8A No output	5 0	3.3 - 5.5V -			

Add "Y" to code for negative polarity output

Add "P" to code for positive polarity output

## How to Create a Model Number

NV1-	Enter number of outputs	CH1 Code	CH2 Code	CH3 Code	CH4 Code	Global Option	Case Option
------	-------------------------	----------	----------	----------	----------	---------------	-------------

No Option	Blank	Blank	No Case
AC Fail, Remote On/Off, 5V/2A Standby, CH1 DC Good	N	U	U Chassis
AC Fail, Remote On/Off, 12V/1A Standby, CH1 DC Good	N1	C	U Chassis with Cover
AC Fail, Remote On/Off, 13.5V/1A Standby, CH1 DC Good	N2	F	U Chassis, Cover and Fan*
ATX AC Fail+Remote On/Off, 5V/2A Standby, CH1 DC Good	N3	I	U Chassis, Cover and Fan*
ATX AC Fail+Remote On/Off, 12V/1A Standby, CH1 DC Good	N4		and IEC inlet

\* A high output CH4 (3H, 5H, TH, FH) or fan supply 0H must be selected to provide fan option.

## Example

### NV1 3 G 5 0 3HP N C

Description: Triple output, 24V/7.5A, 5V/8A, 3.3V/2A, Global option N, U Chassis with cover.

## Mating Parts (Molex)

CONN	Housing	Pins
J1	39-01-2245	45750-3112
J2	09-50-8051	08-52-0113

## Other Industrial Products

NV	300 to 700W Medical, 1-6 outputs
SC40/60	40 to 80W single, dual & triple 3x5 footprint
ZWS/ZWSPAF	5 to 240W single output power supplies

For Additional Information, please visit  
[us.tdk-lambda.com/lp/products/nv-series.htm](http://us.tdk-lambda.com/lp/products/nv-series.htm)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [TDK-Lambda:](#)

[NV1250T0NC](#) [NV1350FF](#) [NV1350FFC](#) [NV1350FFN](#) [NV1350FFNC](#) [NV1350TT](#) [NV1350TTN](#) [NV1452FF](#)  
[NV1452FFC](#) [NV1452FFN](#) [NV1452FFNC](#) [NV1452TT](#) [NV1452TTC](#) [NV1452TTN](#) [NV1452TTNC](#) [NV1453FF](#)  
[NV1453FFC](#) [NV1453TTC](#) [NV1453TTN](#) [NV1453TTN3](#) [NV1453TTNC](#) [NV14G5FF](#) [NV14G5FFN3](#) [NV14G5TTN3](#)  
[NV1250T0](#) [NV1453FFN](#) [NV11T000](#) [NV11G000](#) [NV1250T0C](#) [NV1453FFNC](#) [NV1453FFN3](#) [NV1250T0N](#)  
[NV1350TTC](#) [NV1453TT](#) [NV1350TTNC](#) [NV11G000HF](#) [NV11T000HF](#) [NV14G5TTHF](#) [NV14G5FFHF](#)  
[NV11G000HN3F](#) [NV1250T0HF](#) [NV1-453GFHP](#) [NV1-3G5T0](#)